

CROSSRIDE DISC 29



Use: use only on a Cross-country or Cross-mountain MTB fitted with disc brakes. Any other use (such as on a tandem, road bike, cyclo-cross bike, free-ride or downhill bike...) is highly inadvisable, is the sole responsibility of the user and voids the Mavic warranty.




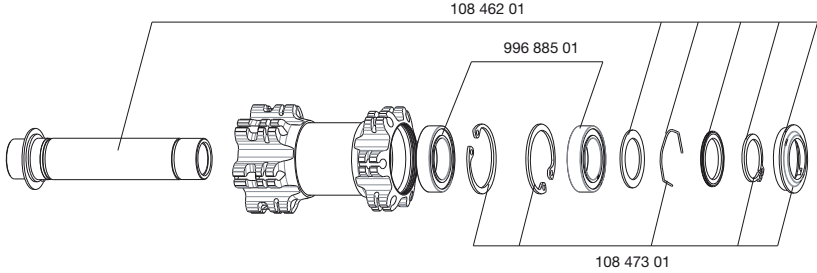
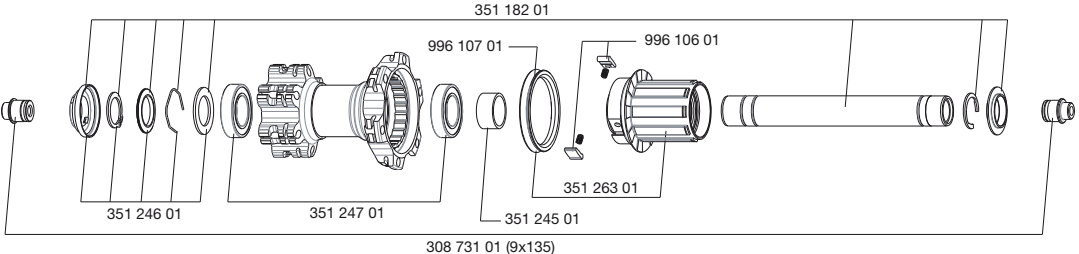
Recommended maximum weight of the cyclist and equipment: 100 kg

WHEEL WEIGHT WITHOUT QUICK-RELEASE SKEWER

Front: 945 g
Rear: 1075 g

REFERENCES

Front: 326 479 10
Rear: 326 480 13
Pair: 326 481 14

RIMS	SALES REFERENCES Front and rear: 351 239 15	
	 Ø VALVE HOLE Ø: 8.5 mm Length: ≥ 32 mm	 RECOMMENDED TYRE WIDTH Dimensions: Ø 29" ETRTO 622 x 19C compatible Recommended clincher width: 1.5" to 2.3"
HUBS	MAINTENANCE: Clean with a dry cloth or soapy water if necessary. Do not use a high-pressure washer.	
		
		
WHEEL BUILDING	REFERENCES AND LENGTHS	Front and rear non-drive side: 351 261 01, length 295 mm (per 14, integrated nipples) Rear drive side: 351 262 01, length 293 mm (per 14, integrated nipples)
FEATURES: Black, round, straight pull steel spokes with Self Lock system and conventional spoke nipples	LACING PATTERN: Front and rear: 2-cross lacing on both sides	TENSION: Front: 100 to 120 kg Rear drive side: 115 to 125 kg
ACCESSORIES	WHEELS SUPPLIED WITH: <ul style="list-style-type: none"> Conventional aluminum quick-release skewer on rear M40352 Rear Adapters 12=>9.5 mm 308 731 01 Rim tape 18x622 (1 per wheel) User guide 	MAINTENANCE <p>Specific tool:</p> <ul style="list-style-type: none"> Front bearing: 108 850 01 & 996 887 01 Rear bearing: M40119
OPTIONS	<ul style="list-style-type: none"> Front Adapters 9 mm + quick-release skewer: 996 941 01 Rear Adapters 12x142 mm: 329 650 01 <p>Refer to the website for quick and convenient access to maintenance information (replacement of an axle, bearings, free wheel, spokes, and rims) www.tech-mavic.com</p>	