

COMETE ROAD 09

USE: use only on a road bike. Any other use (such as on a tandem, cyclo-cross bike, or off-road use...) is highly inadvisable, is the sole responsibility of the user and voids the Mavic warranty.
Recommended maximum weight of the cyclist and his equipment: 100 kg.

WHEEL WEIGHTS WITHOUT QUICK-RELEASE SKEWER

M10: 1165 g
ED10: 1150 g

WHEEL REFERENCES

M10: 996 216 11
ED10: 996 217 12

RIMS

Ø VALVE HOLE



Ø: 6.5 mm
Length.: ≥ 32 mm


RECOMMENDED TIRE WIDTH



Dimensions: ETRTO 622 x 13C
Recommended tire width: 19 to 28 mm

HUBS

MAINTENANCE: Clean with a dry cloth or soap and water if necessary.
Do not use a high-pressure washer.

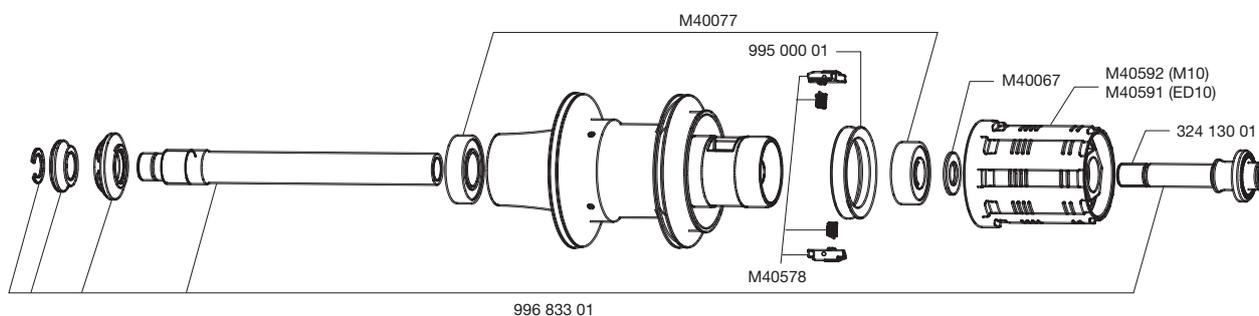

ACCESSORIES

WHEEL SUPPLIED WITH:

- BR 601 rear quick-release M40150
- ED10 12D locking ring M40640 (with rear wheel ED10)
- Rim tape
- Valve extender 323 634 01
- User guide

MAINTENANCE

Replacing the rear axle
Maintaining and replacing the free wheel mechanism
Replacing the rear bearings

See 2008 TM, page 23
See 2003 TM, page 21
See 2008 TM, page 24

To consult this information quickly in a practical manner, refer to www.tech-mavic.com