



**USE:** use only on a Cross Country or Cross Mountain MTB fitted with disc brakes. Any other use (such as on a tandem, road bike, cyclo-cross bike, free-ride or downhill bike...) is highly inadvisable, is the sole responsibility of the user and voids the Mavic warranty.  
Recommended maximum weight of the cyclist and his equipment: 100 kg.

## WHEEL WEIGHTS WITHOUT QUICK-RELEASE SKEWER


	INT	CL
Front:	885 g	880 g
Rear:	1020 g	1015 g

## WHEEL REFERENCES

	INT	CL
Front:	996 176 10	996 179 10
Rear:	996 177 13	996 180 13
Pair:	996 178 14	996 181 14

## RIMS

**REFERENCES:** Front and rear: 996 890 15



### Ø VALVE HOLE



Ø: 8.5 mm with valve adaptor 6.5 mm  
Length.: ≥ 32 mm



### RECOMMENDED TIRE WIDTH



Dimensions: Ø 26"  
ETRTO 559 x 19C  
Recommended tire width: 1.1" to 2.3"

## HUBS

**MAINTENANCE:** Clean with a dry cloth or soap and water if necessary.  
Do not use a high-pressure washer.

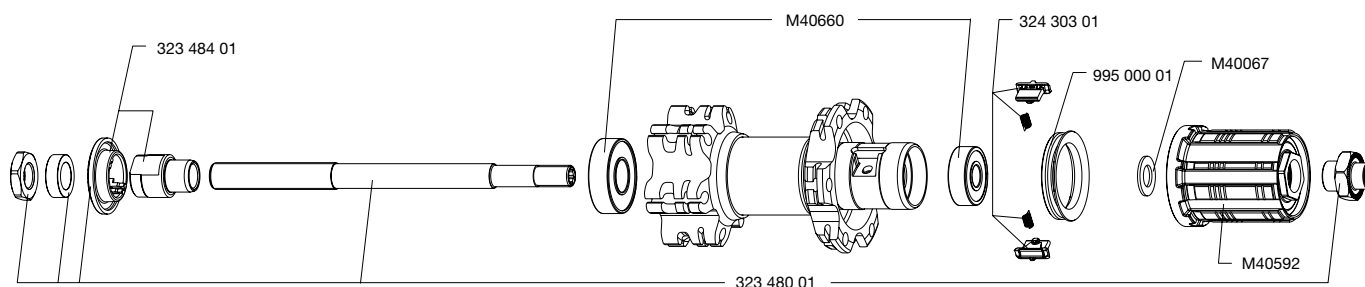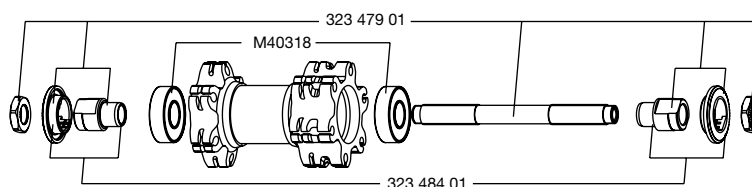

## WHEEL BUILDING

### REFERENCES AND LENGTHS:

Front and rear: 996 875 01, length 261 mm (per 12, with nipples)

### FEATURES:

Black steel straight pull spokes with Self Lock system and conventional spoke nipples.

### LACING PATTERN:

Front and rear: crossed 2 on both sides

### TENSION:

Front disc side: 100 to 120 kg  
Rear drive side: 120 to 140 kg

## ACCESSORIES

### WHEELS SUPPLIED WITH:

- BR 101 front quick-release: M40350
- BR 101 rear quick-release: M40352
- Rim tape 559x20x0.6
- User guide

## MAINTENANCE

Replacing the front axle and bearings  
Replacing the rear axle  
Maintaining and replacing the free wheel mechanism  
Replacing the rear bearings  
Replacing a spoke  
Replacing the front rim  
Replacing the rear rim

See 2004 TM, page 19  
See 2004 TM, page 20  
See 2007 TM, page 21  
See 2004 TM, page 22  
See 2004 TM, page 25  
See page 38  
See page 39

To consult this information quickly in a practical manner, refer to [www.tech-mavic.com](http://www.tech-mavic.com)