CROSSRIDE UB/DISC 09 😂



USE: use only on a Cross Country or Cross Mountain MTB fitted with disc brakes. Any other use (such as on a tandem, road bike, cyclo-cross bike, free-ride or downhill bike...) is highly inadvisable, is the sole responsibility of the user and voids the Mavic warranty.

Recommended maximum weight of the cyclist and his equipment: 100 kg.

WHEEL WEIGHTS WITHOUT QUICK-RELEASE SKEWER

900 g Front: Rear M10: 1040 g

WHEEL REFERENCES STANDARD INTERNATIONAL

996 403 10 996 404 13 Pair: 996 405 14

RIMS

REFERENCES:

996 891 15 Front and rear:

Ø VALVE HOLE

Ø: 8.5 mm with valve adaptor 6.5 mm Length.: ≥ 32 mm

RECOMMENDED TIRE WIDTH





Dimensions: Ø 26' ETRTO 559 x 19C

Recommended tire width: 1.1" to 2.3"

HUBS

MAINTENANCE: Clean with a dry cloth or soap and water if necessary. Do not use a high-pressure washer.

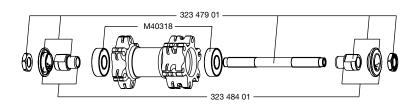

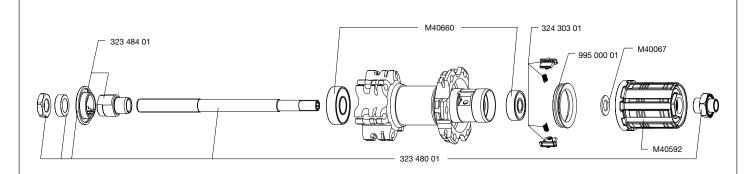

REFERENCES AND LENGTHS:

Front and rear: 996 892 01, length 261 mm (per 12, with nipples)

WHEEL BUILDING

FEATURES:

Silver stainless steel straight pull spokes with Self Lock system and conventional spoke nipples.

LACING PATTERN:

Front and rear: crossed 2 on both sides

TENSION:

Front disc side: 100 to 120 kg Rear drive side: 120 to 140 kg

ACCESSORIES

WHEELS SUPPLIED WITH:

- BR 101 front quick-release: M40350 BR 101 rear quick-release: M40352
- Rim tape 559x20x0.6
- User guide

MAINTENANCE

Replacing the front axle and bearings Replacing the rear axle

Maintaining and replacing the free wheel mechanism

Replacing the rear bearings

Replacing a spoke

Replacing the front rim Replacing the rear rim

See 2004 TM, page 19 See 2004 TM, page 20

See 2007 TM, page 21 See 2004 TM, page 22 See 2004 TM, page 25

See page 38 See page 39

To consult this information quickly in a practical manner, refer to www.tech-mavic.com