

COSMIC CARBONE SR

Use: for road bike use only. Any other use (such as on a tandem, cyclo-cross bike, or off-road use...) is highly inadvisable, is the sole responsibility of the user and voids the Mavic warranty.




Recommended maximum weight of the cyclist and equipment: 100 kg.

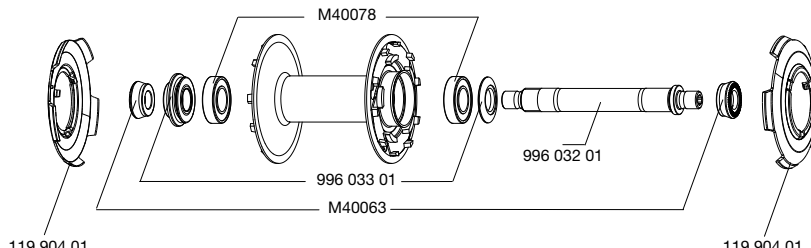
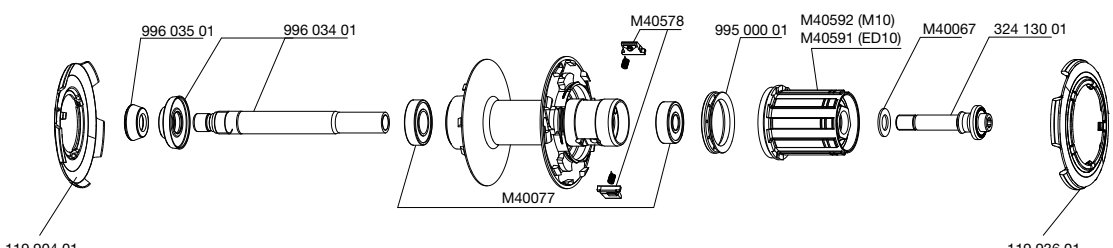
WHEEL WEIGHT WITHOUT QUICK-RELEASE SKEWER

Front	725 g
Rear M10	885 g
Rear ED11	870 g

WHEEL REFERENCES

Front	119 216 10
Rear M10	119 217 11
Rear ED11	119 218 12
Pair M10	119 219 14
Pair ED11	119 220 14

RIMS	SALES REFERENCES:	
	Front: 120 170 10 Rear: 120 170 13	
	 Ø VALVE HOLE Ø: 6.5 mm Length: ≥ 55 mm	 RECOMMENDED TIRE WIDTH Dimensions: ETRTO 622 x 13C Recommended tire width: 19 to 28 mm
When replacing the rear rim: The side of the rim on which the spoke holes are the nearest to the trailing edge is the drive side.		

HUBS	MAINTENANCE: Clean with a dry cloth or soapy water if necessary. Do not use a high-pressure washer.	
		
		

WHEEL BUILDING	REFERENCES AND LENGTHS:	Front and rear non-drive side: Drive side:
		119 901 01, R2R spokes (per 5, with ABS nipples) and 2 hub caps 996 836 01, R2R spokes (per 7, with ABS nipples)
FEATURES:	Unidirectional R2R carbon spokes (rim to rim), ABS nipples	LACING PATTERN: Front and Rear: 2-cross lacing on both sides
		TENSION: Front: 80 to 100 kg Rear drive side: 130 to 150 kg

ACCESSORIES	WHEELS SUPPLIED WITH:	MAINTENANCE
<ul style="list-style-type: none"> • BR 601 front quick-release skewer M40149 • BR 601 rear quick-release skewer M40150 • Removable computer magnet (front wheel) 996 245 01 • Free play adjustment wrench M40123 (with rear wheel) • Aerodynamic spoke wrench 101 295 01 (with rear wheel) • Spoke wrench M40001 (with rear wheel) • Aluminum valve extender, 60 mm, 118 952 01 • Rim tape • ED11 12D locking ring (with rear wheel ED11) 108 317 01 • Wheel user guide 		Replacing the front axle and bearings Replacing the rear axle Maintaining and replacing the free wheel mechanism Replacing the rear bearings Replacing a spoke Replacing the front rim Replacing the rear rim
		See 2005 TM, page 20 See 2008 TM, page 23 See 2003 TM, page 21 See 2008 TM, page 24 See 2009 TM, page 32 See 2009 TM, page 33 See 2009 TM, page 34/35
		Refer to the website for quick and convenient access to information: www.tech-mavic.com