

COMETE TRACK 2013

Use: for track bike use only. Any other use (such as on a tandem, road bike, cyclo-cross bike, or off-road use...) is highly inadvisable, is the sole responsibility of the user and voids the Mavic warranty.

Recommended maximum weight of the cyclist and equipment: 100 kg.

WHEEL WEIGHT WITHOUT QUICK-RELEASE SKEWER AND WITHOUT TUBULAR

Front 980 g
Rear 980 g

WHEEL REFERENCES

Front 327 309 10
Rear 326 664 13



ØØØ VALVE HOLE

Ø: 6.5 mm





RECOMMENDED TYRE WIDTH

Dimensions: ETRTO 633 Tubular
Recommended tubular width: 19 to 28 mm

HUBS

MAINTENANCE: Clean with a dry cloth or soapy water if necessary.
Do not use a high-pressure washer.

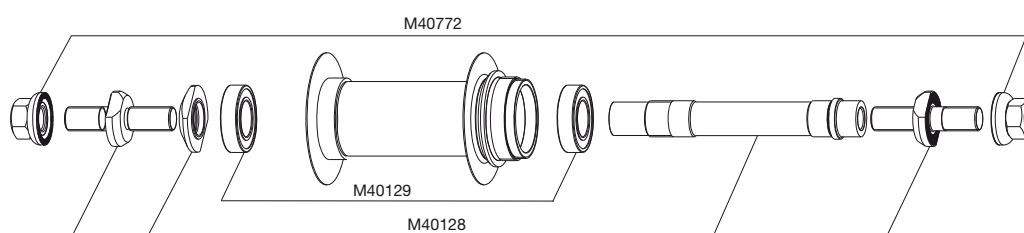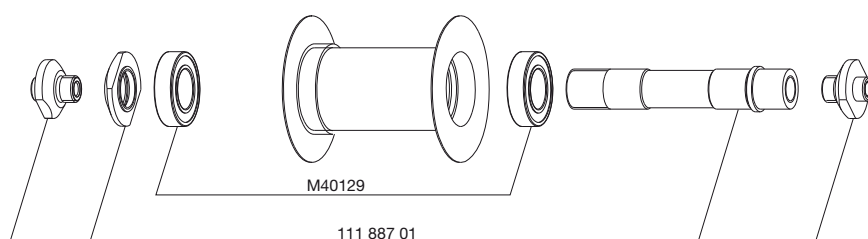

ACCESSORIES

WHEELS SUPPLIED WITH:

- Tightening screw M40772
- Wheel bags M40135
- Wheel user guide

MAINTENANCE

REPLACING THE FRONT AND BEARINGS:

1. Using 2 15 mm open-end wrenches, unscrew the axle end screws. Only one of the 2 needs to be unscrewed from the axle in order for it to be extracted from the hub;
2. To remove the 2nd axle end screw, insert a 5 mm Allen wrench into the axle on the side opposite the remaining axle end screw; hold the axle end screw with a 15 mm open end-wrench and unscrew the assembly;
3. Remove the bearings, then install the new ones;
4. Repeat procedure 1 above in reverse order.