

COSMIC CXR 80

Use: for road bike use only. Any other use (such as on a tandem, cyclo-cross bike, or off-road use...) is highly inadvisable, is the sole responsibility of the user and voids the Mavic warranty.




Recommended maximum weight of the cyclist and equipment: 100 kg.

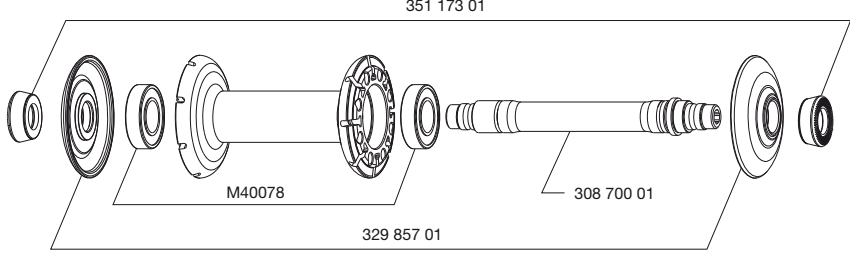
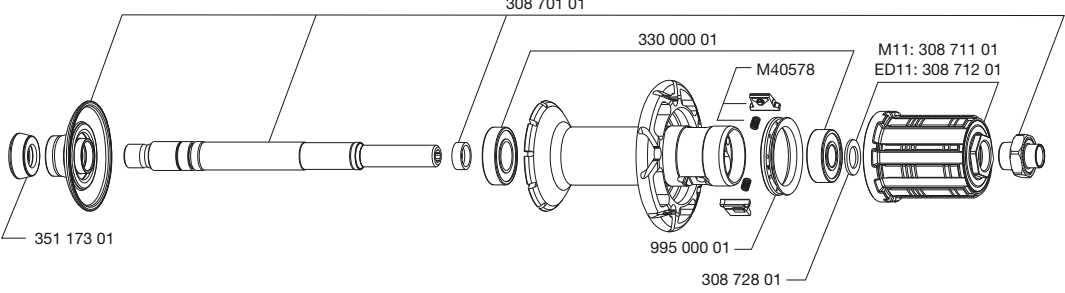
WHEEL WEIGHT WITHOUT QUICK-RELEASE SKEWER AND WITHOUT TUBULAR

Front	725 g
Rear M11	920 g
Rear ED11	905 g

WHEEL REFERENCES

Front	127 322 10
Rear M11	127 323 11
Rear ED11	127 324 12
Pair M10	127 325 14
Pair ED11	127 326 14

RIMS	SALES REFERENCES
	Front: 308 603 10 Rear: 308 603 13
	<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;">  <p>Ø VALVE HOLE Ø: 6.5 mm</p> </div> <div style="width: 45%;">  <p>RECOMMENDED TYRE WIDTH Dimensions: ETRTO 633 Tubular Use only the Yksion CXR tubular</p> </div> </div> <p>When replacing the rear rim:</p> <ol style="list-style-type: none"> 1. With the valve hole near you, turn the rim so that the "infobloc" label can be seen. 2. The first spoke to the right of the valve hole is a non-traction spoke and should be inserted in the drive side hub.

HUBS	MAINTENANCE:
	Clean with a dry cloth or soapy water if necessary. Do not use a high-pressure washer.
	
	

WHEEL BUILDING	REFERENCES AND LENGTHS:
	Front and rear non-drive side: 308 632 01, length 235 mm (per 8, nipples included) Drive side: 308 631 01, length 232 mm (per 10, nipples included)
FEATURES: Black, swaged, bladed, straight pull steel spokes with ABS type spoke nipples	LACING PATTERN: Front: radial Rear: 2-crossed drive side, radial non-drive side
	TENSION: Front: 60 to 70 kg Rear drive side: 100 to 110 kg

ACCESSORIES	WHEELS SUPPLIED WITH:	MAINTENANCE
<ul style="list-style-type: none"> • BR 601 front quick-release skewer M40149 • BR 601 rear quick-release skewer M40150 • Computer magnet M40540 (with front wheel) • Spoke wrench M40001 (with rear wheel) • 2 multifunction adjustment wrenches 325 423 01 • Valve extender 118 952 01 • Wheel bags M40135 • Yksion CXR GripLink front tubular (127 785 23) • Yksion CXR PowerLink rear tubular (127 786 23) • CX01 blades 128 994 01 • Mavic CXR specific brake pads for braking on a carbon brake track: HG/Sram/Mavic 128 443 01 or ED 128 444 01 • ED11 12D locking ring (with rear wheel ED11) 108 317 01 • Wheel, tubular and CX01 user guide 		Specific tool: <ul style="list-style-type: none"> • Front bearing: M40120 • Rear bearing: M40120 and 351 266 01 • Spoke wrench: M40001
		Refer to the website for quick and convenient access to maintenance information (replacement of an axle, bearings, free wheel, spokes, and rims) www.tech-mavic.com