

R-SYS

Use: for road bike use only. Any other use (such as on a tandem, cyclo-cross bike, or off-road use...) is highly inadvisable, is the sole responsibility of the user and voids the Mavic warranty.

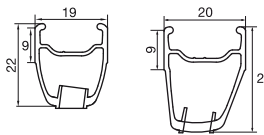


Recommended maximum weight of the cyclist and equipment: 100 kg.

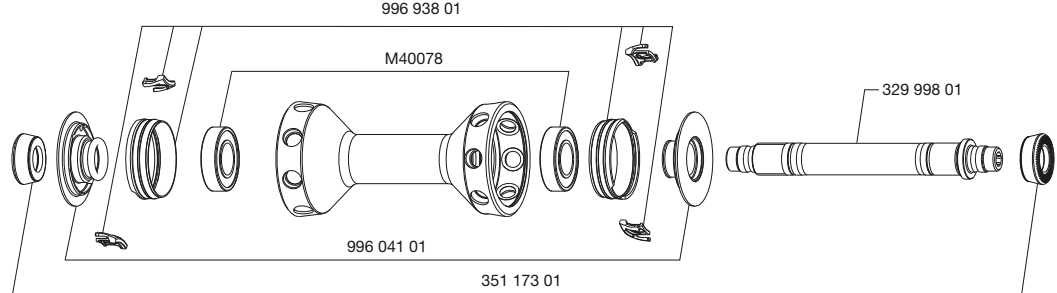
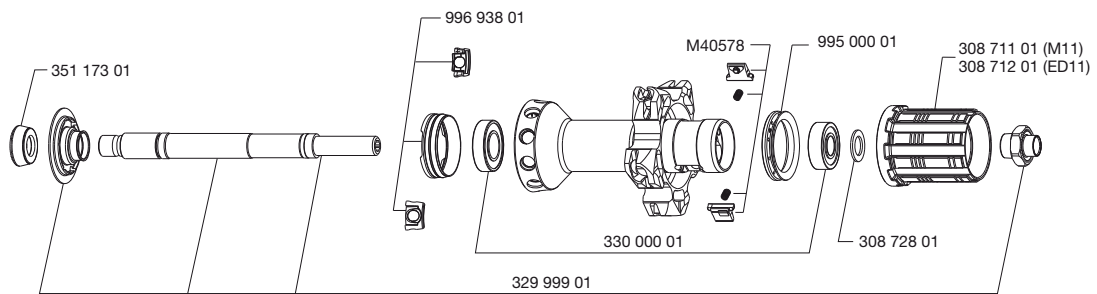
WHEEL WEIGHT WITHOUT QUICK-RELEASE SKEWER AND WITHOUT CLINCHER


Front	575 g
Rear M10	795 g
Rear ED11	780 g

WHEEL REFERENCES

Front	328 274 10
Rear M10	328 275 11
Rear ED11	328 276 12
Pair M10	328 277 14
Pair ED11	328 278 14

RIMS	SALES REFERENCES	Front: 308 607 10 Rear: 308 607 13
	 Ø VALVE HOLE Ø: 6.5 mm	 RECOMMENDED TYRE WIDTH Dimensions: ETRTO 622x15C Recommended clincher width: 23 to 32 mm
	When replacing the rear rim: <ol style="list-style-type: none"> 1. With the valve hole near you, the two raised indicator bumps must be to the right of the valve hole. 2. The spoke in the first hole to the right of the valve hole should be inserted in the drive side. 	

HUBS	MAINTENANCE:	Clean with a dry cloth or soapy water if necessary. Do not use a high-pressure washer.
		
		

WHEEL BUILDING	REFERENCES AND LENGTHS:	Front: 107 958 01, length 285 mm (per 9 + 1 decorated, integrated nipples) Drive side: 108 445 01, length 294.5 mm (per 10, integrated nipples) Non-drive side: 107 959 01, length 284 mm (per 10 + 1 decorated, integrated nipples)
FEATURES:	Front and rear non-drive side: carbon tubular spokes (Tracomp) - new generation Rear drive side: black round, straight pull Zicral spokes with integrated, self-locking M7 nipples	LACING PATTERN: Front: radial, Tracomp system Rear: 2-cross lacing drive side, radial non-drive side, Tracomp system
		 TENSION: Front: 70 to 90 kg Rear drive side: 90 to 110 kg

ACCESSORIES	WHEELS SUPPLIED WITH:	MAINTENANCE
<ul style="list-style-type: none"> • BR 601 front quick-release skewer M40149 • BR 601 rear quick-release skewer M40150 • Removable computer magnet (with front wheel) 105 416 01 • 2 multifunction adjustment wrenches 325 423 01 • Tracomp ring tool 996 080 01 • Wheel bags M40135 • ED11 12D locking ring (with rear wheel ED11) 108 317 01 • Yksion Pro White GripLink 23 mm front clincher (328 351 23) • Yksion Pro White PowerLink 23 mm rear clincher (328 352 23) • Mavic butyl inner tubes (127 385 01) • Wheel and clincher user guide 		Specific tool: <ul style="list-style-type: none"> • Front bearing: M40120 • Rear bearing: M40120 and 351 266 01 • Spoke wrench: 996 079 01
Never turn a Tracomp spoke nipple without having first removed the Tracomp rings from the hub, otherwise the spoke may be irreversibly damaged. Never fit a computer magnet other than the one supplied with the wheel. Only transport the wheels in the wheel bags supplied. Avoid side shocks to the Tracomp spokes.		Refer to the website for quick and convenient access to maintenance information (replacement of an axle, bearings, free wheel, spokes, and rims) www.tech-mavic.com