

Use: use only on a Cross-country or Cross-mountain MTB fitted with disc brakes. Any other use (such as on a tandem, road bike, cyclo-cross bike, free-ride or downhill bike...) is highly inadvisable, is the sole responsibility of the user and voids the Mavic warranty

Recommended maximum weight of the cyclist and equipment: 100 kg.

#### WHEEL WEIGHT WITHOUT QUICK-RELEASE SKEWER AND WITHOUT TYRE

Front: Rear: 1025 g **CANNONDALE OEM** 

### **RIMS**

SALES REFERENCESt and rear: 366 929 15









### RECOMMENDED TYRE WIDTH

Dimensions: ETRTO 622x19C Recommended clincher width: 1.5" to 2.3"

**HUBS** 

MAINTENANCE: Clean with a dry cloth or soapy water if necessary. Do not use a high-pressure washer.



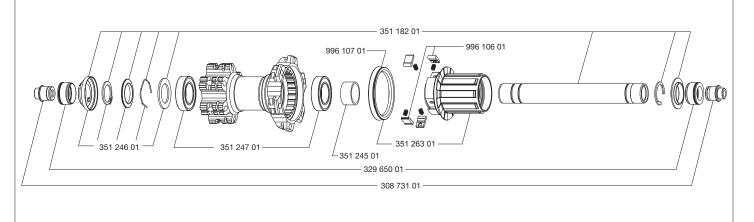

## WHEEL BUILDING

REFERENCES AND LENGTHS:

Front: Drive side:

Non-drive side:

366 897 01, length 301 mm (per 12, nipples included) 366 896 01, length 293 mm (per 12, nipples included) 366 895 01, length 295 mm (per 12, nipples included)

FEATURES:

Black, swaged, bladed, straight pull steel spokes with steel ABS type spoke nipples

LACING PATTERN:

Front and rear: 2-cross lacing on both sides

TENSION:

Front: 105 to 120 kg

Rear drive side: 105 to 120 kg

# **ACCESSORIES**

WHEELS SUPPLIED WITH:

- BR 101 rear quick-release skewer M40351
  Tubeless rim strip 19x622 (1 per wheel): 359 938 01
  2 Removable round UST valves 129 838 01
- Rear Adapter 12=>9.5 mm 308 731 01
- Valve reduction M40381
- Crossroc Roam front and rear clincher 29x2.20 (356 288 22)
- Lefty assembly accessories M40777
- User manual

# **MAINTENANCE**

Specific tool:

• Front bearing: 996 887 01 & M40218

 Rear bearing: M40119

Refer to the website for quick and convenient access to maintenance information  $% \left( 1\right) =\left( 1\right) \left( 1\right) \left$ (replacement of an axle, bearings, free wheel, spokes, and rims)

www.tech-mavic.com