

CROSSROC WTS 650b (27.5) Lefty Supermax



Use: use only on a Cross-country or Cross-mountain MTB fitted with disc brakes. Any other use (such as on a tandem, road bike, cyclo-cross bike, free-ride or downhill bike...) is highly inadvisable, is the sole responsibility of the user and voids the Mavic warranty.

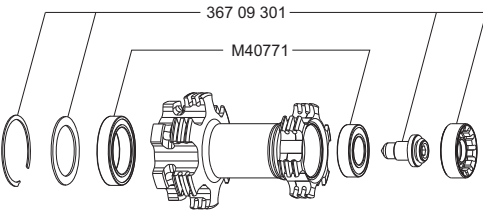
Recommended maximum weight of the cyclist and equipment: 100 kg.

WHEEL WEIGHT WITHOUT QUICK-RELEASE SKEWER AND WITHOUT TYRE

Front: 855 g
Rear: 970 g

CANNONDALE OEM

RIMS	SALES REFERENCES Front and rear: 366 928 15	
	Ø VALVE HOLE Ø: 6.5 mm	RECOMMENDED TYRE WIDTH Dimensions: ETRTO 584x19C Recommended clincher width: 1.5" to 2.3"

HUBS	MAINTENANCE: Clean with a dry cloth or soapy water if necessary. Do not use a high-pressure washer.
	

WHEEL BUILDING	REFERENCES AND LENGTHS: Front: 366 894 01, length 282 mm (per 12, nipples included) Drive side: 366 893 01, length 275 mm (per 12, nipples included) Non-drive side: 336 892 01, length 277 mm (per 12, nipples included)	
FEATURES: Black, swaged, bladed, straight pull steel spokes with steel ABS type spoke nipples	LACING PATTERN: Front and rear: 2-cross lacing on both sides	TENSION: Front: 105 to 120 kg Rear drive side: 105 to 120 kg

ACCESSORIES	WHEELS SUPPLIED WITH:	MAINTENANCE
<ul style="list-style-type: none"> • BR 101 rear quick-release skewer M40351 • Tubeless rim strip 19x584 (1 per wheel): 359 937 01 • 2 Removable round UST valves 129 838 01 • Rear Adapter 12=>9.5 mm 308 731 01 • Valve reduction M40381 • Crossroc Roam front and rear clincher 27.5x2.20 (356 289 22) • Lefty assembly accessories M40777 • User manual 		Specific tool: • Front bearing: 996 887 01 & M40218 • Rear bearing: M40119 Refer to the website for quick and convenient access to maintenance information (replacement of an axle, bearings, free wheel, spokes, and rims) www.tech-mavic.com