

# COSMIC CXR 60 (clincher version)

**Use:** for road bike use only. Any other use (such as on a tandem, cyclo-cross bike, or off-road use...) is highly inadvisable, is the sole responsibility of the user and voids the Mavic warranty.

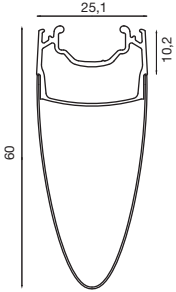



Recommended maximum weight of the cyclist and equipment: 100 kg.

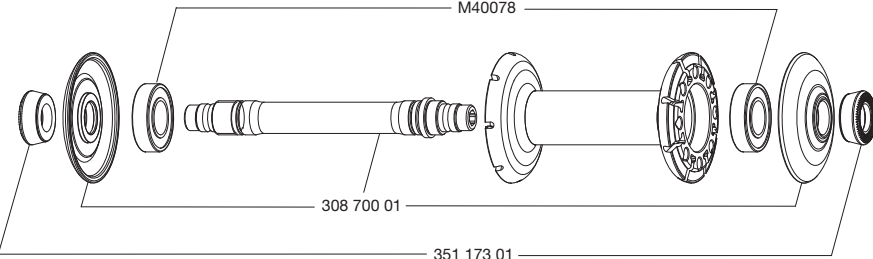
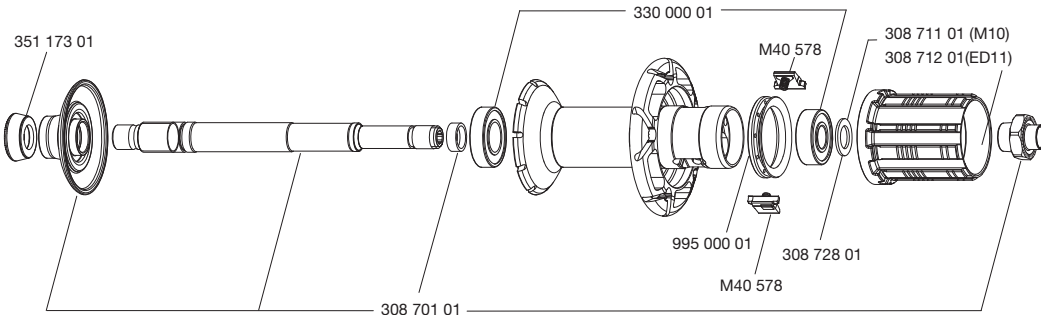
## WHEEL WEIGHT WITHOUT QUICK-RELEASE SKEWER AND WITHOUT TYRE

Front	820 g
Rear M11	1020 g
Rear ED11	1005 g

## WHEEL REFERENCES

Front	354 675 10
Rear M11	354 676 11
Rear ED 11	354 677 12
Pair M11	354 678 14
Pair ED11	354 679 14

RIMS	SALES REFERENCES
	Front: 329 765 10 Rear: 329 765 13
	<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;">  <p><b>Ø VALVE HOLE</b> Ø: 6.5 mm</p> </div> <div style="width: 45%;">  <p><b>RECOMMENDED TYRE WIDTH</b> Dimensions: ETRTO 622x13C Clincher width: 23 mm</p> </div> </div>
	<p><b>When replacing the rear rim:</b></p> <ol style="list-style-type: none"> <li>1. With the valve hole near you, turn the rim so that the "infobloc" label can be seen.</li> <li>2. The second spoke to the right of the valve hole is a non-traction spoke and should be inserted in the drive side hub.</li> </ol>
 <p>EXALITH 2: for efficient and long-lasting braking performance, use only the special Mavic® Exalith 2® brake pads supplied with your wheels. The use of other brake pads may be dangerous for the user and may void the warranty. Please carefully read the "Exalith 2 Warning" provided with your wheels. Clean with a dry cloth or soapy water if necessary. Do not use a high-pressure washer. The brake pads can be ordered separately using the following references 129 888 01 (HG, Sram, Mavic) and 129 889 01 (ED)</p>	

HUBS	MAINTENANCE:
	Clean with a dry cloth or soapy water if necessary. Do not use a high-pressure washer.
	
	

WHEEL BUILDING	REFERENCES AND LENGTHS:
	Front and rear non-drive side: 329 768 01, length 289 mm (per 10, nipples included) Drive side: 329 767 01, length 287 mm (per 10, nipples included)
<b>FEATURES:</b> Black, swaged, bladed, straight pull steel spokes with steel ABS type spoke nipples	<b>LACING PATTERN:</b> Front: radial Rear: 2-crossed drive side, radial non-drive side
	<b>TENSION:</b> Front: 80 to 90 kg Rear drive side: 110 to 120 kg
ACCESSORIES	WHEELS SUPPLIED WITH:
<ul style="list-style-type: none"> <li>• BR 601 front quick-release skewer M40149</li> <li>• BR 601 rear quick-release skewer M40150</li> <li>• Rim strip 18x622 (1 per wheel)</li> <li>• Wheel bags M40135</li> <li>• Mavic CXR specific brake pads for braking on Exalith 2 brake track HG/Sram/Mavic 129 888 01 or ED 129 889 01</li> <li>• Valve extender 118 952 01</li> <li>• Multifunction adjustment wrench 325 423 01</li> <li>• Yksion CXR GripLink 23 mm front clincher (326 733 23)</li> <li>• Yksion CXR PowerLink 23 mm rear clincher (326 734 23)</li> <li>• Mavic butyl inner tubes (127 385 01)</li> <li>• CX01 blades 128 994 01</li> <li>• ED11 12D locking ring (with rear wheel ED11) 108 317 01</li> <li>• User manual</li> <li>• Sheet of Mavic stickers</li> </ul>	<b>MAINTENANCE</b> Specific tool: <ul style="list-style-type: none"> <li>• Front bearing: M40120</li> <li>• Rear bearing: M40120 &amp; 351 266 01</li> <li>• Spoke wrench: M40001</li> </ul>
	Refer to the website for quick and convenient access to maintenance information (replacement of an axle, bearings, free wheel, spokes, and rims) <a href="http://www.tech-mavic.com">www.tech-mavic.com</a>