COSMIC ELITE S

Use: for road bike use only. Any other use (such as on a tandem, cyclo-cross bike, or off-road use...) is highly inadvisable, is the sole responsibility of the user and voids the Mavic warranty

Recommended maximum weight of the cyclist and equipment: 100 kg.

WHEEL WEIGHT WITHOUT QUICK-RELEASE SKEWER AND WITHOUT TYRE

815 g Rear M11 970 g Rear ED11 955 g

WHEEL REFERENCES

328 205 10 Rear M11 328 206 11 Rear ED11 328 207 12 328 208 14 Pair M11 328 209 14 Pair ED11

RIMS

SALES REFERENCES

Front and rear: 120 173 15










RECOMMENDED TYRE WIDTH


Dimensions: ETRTO 622x15C

Recommended clincher width: 19 to 32 mm

HUBS

MAINTENANCE: Clean with a dry cloth or soapy water if necessary. Do not use a high-pressure washer.

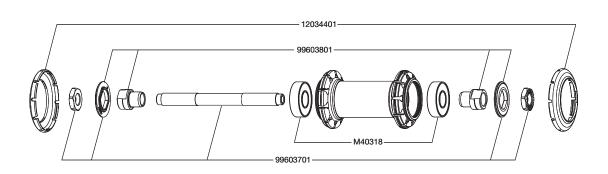

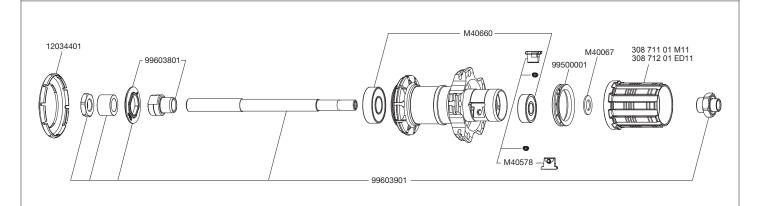

WHEEL BUILDING

REFERENCES AND LENGTHS:

Front and rear non-drive side:

366 448 01, length 276 mm (per 10, nipples included)

366 449 01, length 292 mm (per 10, nipples included)

FEATURES:

Black, bladed, straight pull steel spokes with steel ABS type spoke nipples

LACING PATTERN:

Front: radial Rear: 2-crossed drive side, radial non-drive side TENSION:

Front: 90 to 100 kg

Rear drive side: 150 to 160 kg

ACCESSORIES

WHEELS SUPPLIED WITH:

- BR 101 front quick-release skewer M40350
- BR 101 rear guick-release skewer M40351
- Rim strip 18x622 (1 per wheel)
- Yksion Comp 23 mm front and rear clincher (325 934 23)
- Mavic butyl inner tubes (127 385 01)
- ED11 12D locking ring (with rear wheel ED11) 108 317 01
- User manual

MAINTENANCE

Specific tool:

M40373 Front bearing:

 Rear bearing: M40373

Refer to the website for quick and convenient access to maintenance information $% \left(1\right) =\left(1\right) \left(1\right) \left$ (replacement of an axle, bearings, free wheel, spokes, and rims) www.tech-mavic.com