


MAVIC E-DEEMAX S 30 29

1
2021
FRONT

ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT
Um eine längere Lebensdauer der Laufräder zu erzielen, empfiehlt Mavic als Obergrenze für das Gesamtgewicht von Fahrer, Ausrüstung und Fahrrad/E-B
Recommended tyre sizes: 60mm to 76mm (2.35" to 3.0")
Maximum tyre pressure: 2.95bar/43PSI with a 52mm tyre - 1.55bar/22PSI with a 125mm tyre
Mindestgröße des Reifens: Breite 52mm - max. Druck 2.95Bar/43PSI
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, Ebike included

REFERENZEN RÄDER

F91623	E-DEEMAX S 30 INT 29 BST	F91633	E-DEEMAX S 30 CL 29 BST
--------	--------------------------	--------	-------------------------

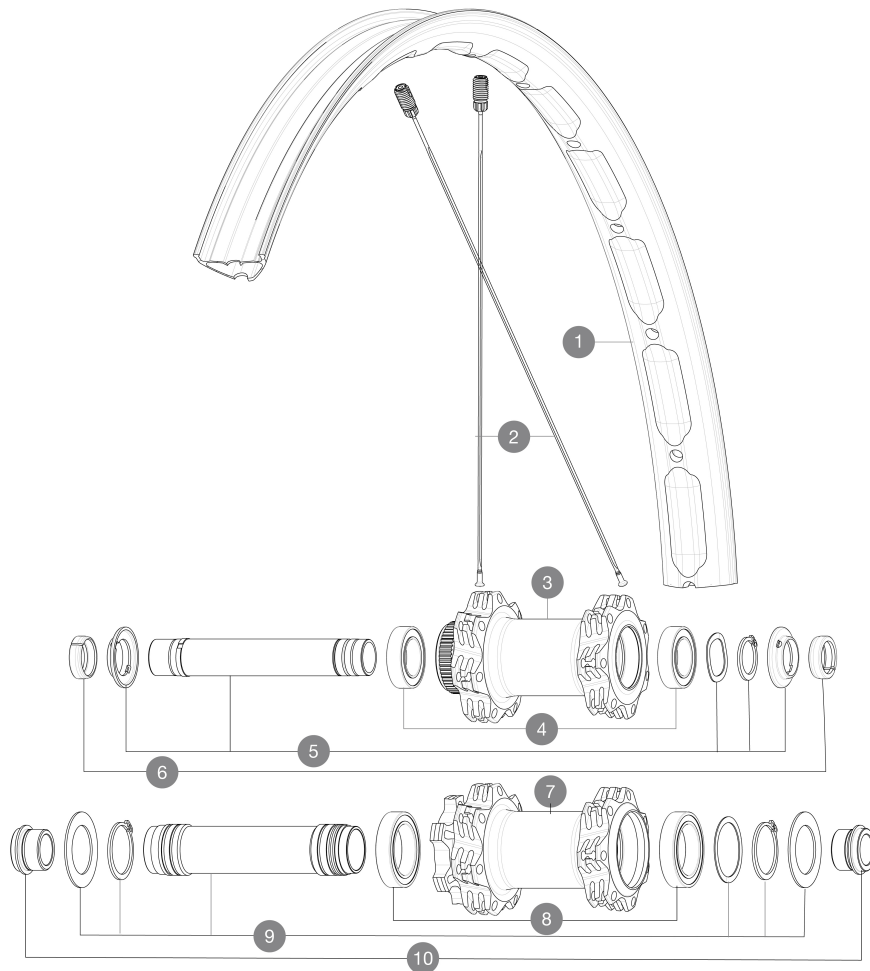

RIMS



1	V3766415	Kit Front/Rear rim eDeemax S 29
	V3750101	35mm UST Green Tape for 30mm wide rims

SPOKES

2	V2388501	Kit 14 Front eDeemax S 29" butted spoke 306 M7/7
---	----------	--

HUB SHELLS

3	N/A	NABENKÖRPER
4	V2500901	KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
5	V2375601	Kit 110mm axle QRM auto MTB from 2019 DCL
7	N/A	NABENKÖRPER
8	M40179	FRONT BEARING 25x37x7 20mm AXLE
9	V2373701	KIT 20x110mm BOOST AXLE QRM AUTO MTB > 2019

OPTIONS

V2650401	TORQUECAP20*31 FT QRM AUTO MTB
V2374401	TORQUE CAPS 15*31 Adapter MTB QRM Auto > 2019 Frt HUB

ADAPTERS

6	V2372501	15mm MTB Axle Cap QRM Auto From 2019
10	12982801	15mm ADAPTER KIT - 2012 WHEELS
	V2680401	20x110 BOOST Front Adapter MTB wheels
	99694101	2 REDUCERS 15/9mm

GELIEFERT MIT

2 replacement spokes with each wheel	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Bedienungsanleitung	
2 replacement spokes with each wheel	
2 replacement spokes with each wheel	
2 replacement spokes with each wheel	
Fore adjustment wrench	
Fore adjustment wrench	

COMPATIBILITY

Freewheel: Shimano HG9, XD or Micro Spline	
VR-Achse: 15x100 mm, umrÄ¼stbar auf 20x110 mm mit beiliegenden Adaptern	
VR-Achse: 15x100 mm, umrÄ¼stbar auf 20x110 mm mit beiliegenden Adaptern	
Rear axle: 12x148 Boost thru axle	
VR-Achse: 15x100 mm, umrÄ¼stbar auf 20x110 mm mit beiliegenden Adaptern	
Adapter Hinterachse: 12x148 umwandelbar in 9x141 (Kit V2510801 separat erhÄ¼ltlich)	
Freewheel: Shimano HG9, XD or Micro Spline	
Freewheel: Shimano HG9, XD or Micro Spline	
Rear axle: 12x148 Boost thru axle	
Rear axle: 12x148 Boost thru axle	
VR in 6-Loch-Disc-Version, mit optionalen Adaptern auf 20x110-mm-Steckachse (Boost) umrÄ¼stbar	
Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel)	
VR-Achse: nur fÄ¼r Schraubmuttern (im Lieferumfang enthalten), M10x1-Gewinde	

Specifications

FELGEN

- **Material** : Mxtal
- **Material** : S6000 Aluminum
- **Material** : Mxtal
- **Weight reduction** : ISM
- E-Bike specific rim profile
- **Material** : Mxtal
- **Material** : Mxtal
- **Tire** : UST Tubeless and tubetype
- **Material** : S6000 Aluminum
- **Material** : S6000 Aluminum

RADNABE

- **KÄ¼rpermaterial** : aluminium
- **Axles** : Front 15X110 Boost ; Rear 12X148 Boost
- **Standard Disc** : 6 LÄ¼cher oder Center LockÄ¼®
- Hub available with 6-bolt or center lock (R) brake rotors
- **Material der Achse** : Aluminium
- **AchsgrÄ¼Öe** : vorne 15x110 / hinten 12x148
- **Freilauftechnologie** : Instant Drive 360
- **Freilauf** : Shimano HG MTB / Shimano MS / Sram XD MTB

RADGEWICHTE

960