MAVIC COSMIC SL 40 LTD

ASTM CATEGORY 1 : road only
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included
Recommended tire sizes: 25 to 32 mm
Max. Pressure: see indication on wheel and tire. If they differ, use the lowest of the 2

REFERENCES WHEELS

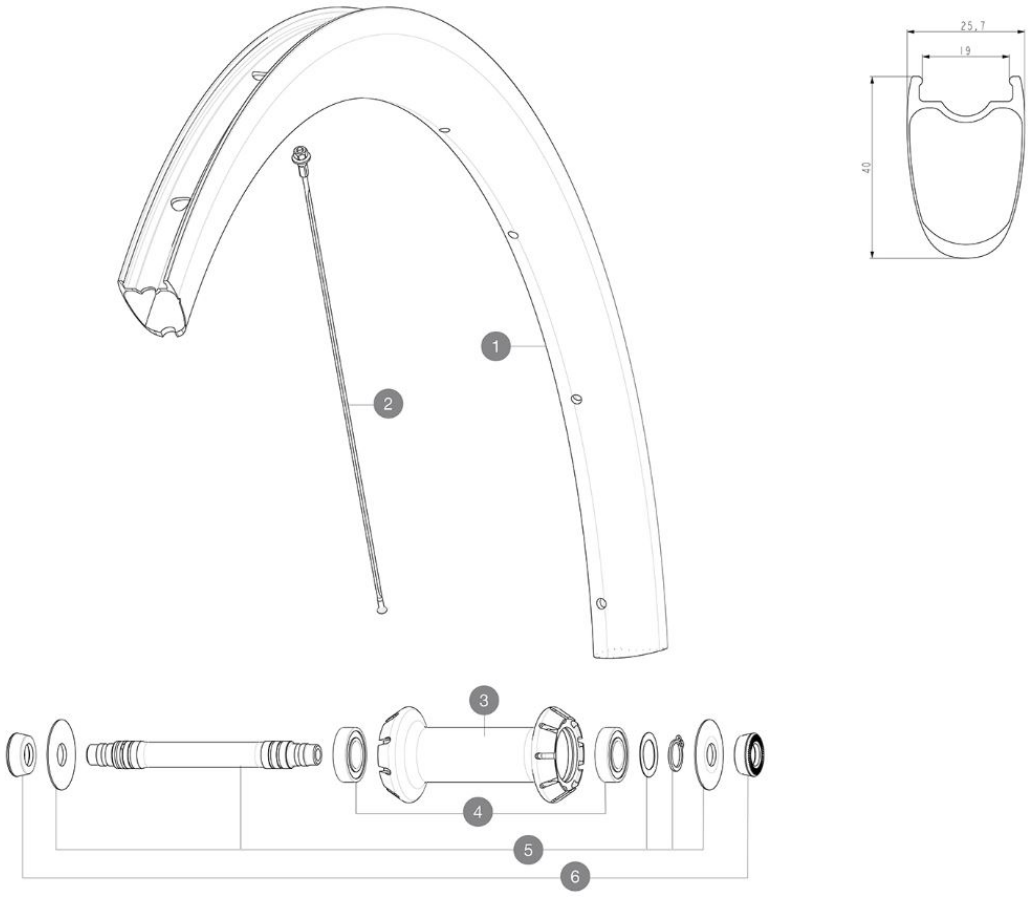

RIMS

 :

1	V00063201	Kit Front rim Cosmic SL40 Ltd
	V3720101	25mm UST Tape for 19 to 22mm Road Rims

SPOKES

2	V4163001	Kit 9 front Cosmic SL 40 RB butted stainless spoke 271mm + s

HUB SHELLS

3	N/A	HUB BODY
4	M40078	FRONT HUB BEARINGS 6901 x 2
5	V2375801	Kit front axle RB for QRM auto hub + hoobster + wave washer

ADAPTERS

6	35117301	FT/RR FORK REST R-SYS/CC ULTIMATE > 2013/KSY PRO CARB T

Download date: 2024-07-16 / Update date: 2024-02-15

MAVIC COSMIC SL 40 LTD

DELIVERED WITH

BR301 quick releases (V24 501 01 frt, V24 502 01 rear)	
Carbon brake pads (V24 603 01 Shimano/Sram, V24 604 01 Campagnolo)	
UST valve and accessories (129 838 01)	
Pre-installed tubeless rim tape	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram, convertible to Campagnolo ED11, N3W and XD-R with optional driver bodies	
Front axle: Quick Release only	
Rear axle: Quick Release only	

Specifications

RIMS

- **Material :** 100% carbon fiber
- **Height :** 40 mm
- **Drilling :** traditional
- **Tire :** UST Tubeless and tubetype
- **Internal width :** 19 mm
- **ETRTO size :** 622x19TC

Use with Mavic Tubeless Tape
UST tubeless technology
iTgMAX carbon clincher technology for rim brake

SPOKES

- **Material :** steel
- **Shape :** straight pull, flat, double butted
- **Nipples :** aluminum, ABS
- **Count :** front 18, rear 24
- **Lacing :** front crossed 2, rear Isopulse

Isopulse lacing design

WHEEL HUB

- **Front and rear bodies :** aluminum
- **Axle material :** aluminum

Instant Drive 360 freewheel technology
QRM Auto bearing preload technology

VERSIONS

- **Freewheel :** Shimano/Sram

WHEEL WEIGHTS

705

Download date: 2024-07-16 / Update date: 2024-02-15