
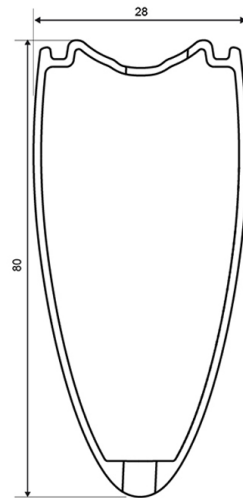


ASTM CATEGORY 1 : road only  
Recommended weight limit : 120kg  
Recommended tyre size: 23 mm

## REFERENCES WHEELS

F33201 CXRUlti60T16ft

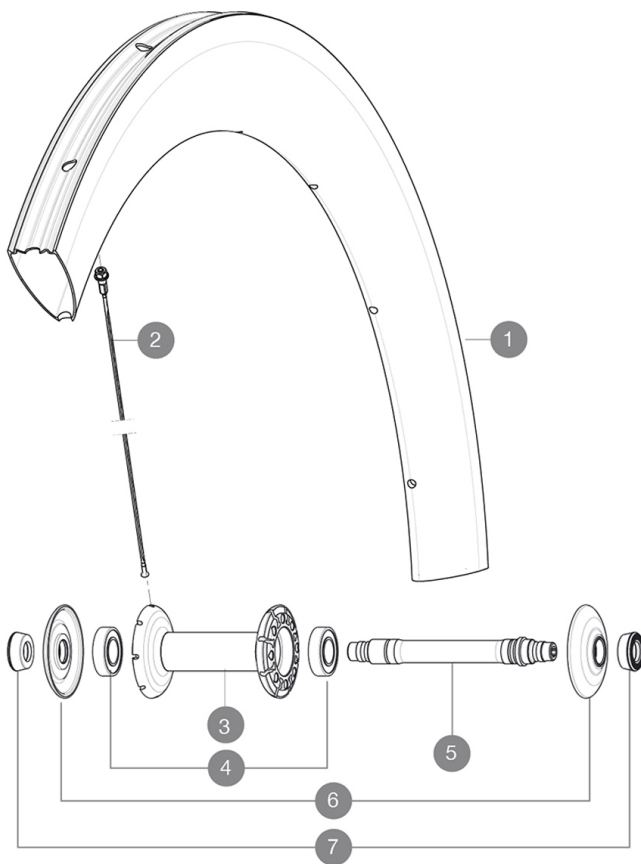

## RIMS



VALVE HOLE  $\varnothing$  (MM): 6,5 :

|   |          |                                                 |
|---|----------|-------------------------------------------------|
| 1 | V2403510 | KIT FRONT RIM CXR60T 2016                       |
| 1 | 32979310 | KIT FRONT RIM CXR 60 TUBULAR - while stock last |

## SPOKES

|   |          |                                             |
|---|----------|---------------------------------------------|
| 2 | 32979601 | KIT 10 AERO FT/ND5 CXR 60 T BLK SPOKE 255mm |
|---|----------|---------------------------------------------|

## HUB SHELLS

|   |          |                                   |
|---|----------|-----------------------------------|
| 3 | N/A      | HUB BODY                          |
| 4 | M40078   | FRONT HUB BEARINGS 6901 x 2       |
| 5 | 30870001 | FRONT AXLE ROAD RIM BRAKING QRM + |
| 6 | 32985701 | HUB CAP & ADJUSTING NUT CXR 80    |

## ADAPTERS

|   |          |                                                         |
|---|----------|---------------------------------------------------------|
| 7 | 35117301 | FT/RR FORK REST R-SYS/CC ULTIMATE > 2013/KSY PRO CARB T |
|---|----------|---------------------------------------------------------|

MAVIC

CXR Ultimate 60 T

DELIVERED WITH

|                                 |  |
|---------------------------------|--|
| BR601 quick releases            |  |
| BR601 quick releases            |  |
| CXR specific carbon brake pads  |  |
| Valve extender                  |  |
| CXR specific carbon brake pads  |  |
| Multifunction adjustment wrench |  |
| User guide                      |  |
| Valve extender                  |  |
| Multifunction adjustment wrench |  |
| User guide                      |  |

Specifications

RIMS

- **Material** : 100% woven 3K carbon fiber
- **Height** : 60 mm, Width 27 mm with CX01 groves
- **Material** : 100% woven 3K carbon fiber
- **Drilling** : traditional
- **Brake track** : carbon
- **Valve hole diameter** : 6.5 mm
- **Tyre** : tubular
- **ETRTO size** : 28" tubular
- **Recommended tyre size** : 23 mm
- **Height** : 60 mm, Width 27 mm with CX01 groves
- **Drilling** : traditional
- **Brake track** : carbon
- **Valve hole diameter** : 6.5 mm
- **Tyre** : tubular
- **ETRTO size** : 28" tubular

SPOKES

- **Material** : steel
- **Shape** : straight pull, bladed, double butted
- **Nipples** : aluminum, ABS
- **Count** : front 16, rear 20
- **Material** : steel
- **Lacing** : radial front and rear non-drive side, crossed 2 rear drive side
- **Shape** : straight pull, bladed, double butted
- **Nipples** : aluminum, ABS
- **Count** : front 16, rear 20
- **Lacing** : radial front and rear non-drive side, crossed 2 rear drive side

WHEEL HUB

- **Front and rear bodies** : carbon center tube and aluminum flanges
- **Front and rear bodies** : carbon center tube and aluminum flanges
- **Axle material** : aluminum
- Adjustable sealed cartridge bearings
- **Freewheel** : FTS-L steel
- **Axle material** : aluminum
- Adjustable sealed cartridge bearings
- **Freewheel** : FTS-L steel

WHEEL WEIGHTS

Wheel weight 710