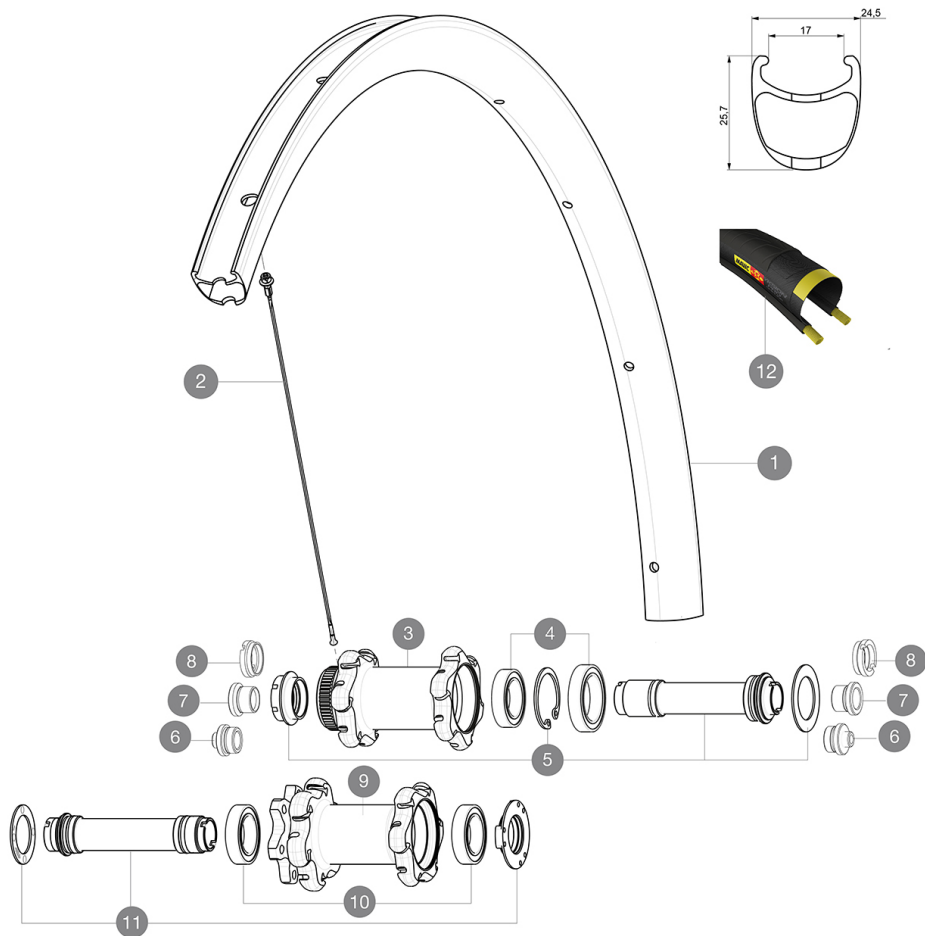


ASTM CATEGORY 1 : road only  
Recommended weight limit : 120kg  
Recommended tyre sizes: 25 to 52 mm  
Max. Pressure: 25mm 7.7 bars - 110 PSI

## REFERENCES WHEELS

|        |                         |        |                          |
|--------|-------------------------|--------|--------------------------|
| F51101 | KsyProCarbSLCDisc Ft CL | F51001 | KsyProCarbSLCDisc Ft INT |
|--------|-------------------------|--------|--------------------------|



## RIMS



VALVE HOLE  $\bar{A}$  (MM): 6,5 :

|          |          |   |
|----------|----------|---|
| <b>1</b> | V2401610 | KIT FRT RIM KSYRIUM PRO CARBON SL DISC Clinch - while stock |
| <b>1</b> | V2734010 | KIT FRONT RIM KSYRIUM PRO CARBON SL UST DISC                |
|          | V2620101 | UST RIM TAPE 25mm (for 21-24mm wide rim)                    |
|          | V2690101 | KIT CARBON RIM TAPE 21x622mm - FOR CARBON RIM               |

## SPOKES

|          |          |   |
|----------|----------|---|
| <b>2</b> | V2271501 | KIT 12 FT KSY PRO CARB SL D/NDS KSY PRO CARB SL SPK 291mm - |
| <b>2</b> | V3663301 | KIT 12 FRT KSYR PRO CARB SL UST Disc + NDS KSYR PRO CARB SL |

## HUB SHELLS

|           |          |  |
|-----------|----------|--|
| <b>3</b>  | N/A      | HUB BODY   |
| <b>4</b>  | 99688601 | BEARING KIT 9/15 DCL HUB 20x32x7 6804 + 25x37x7 6805 |
| <b>5</b>  | V2252401 | KIT MY16 FRONT AXLE ROAD DISC 9/12/15 CL             |
| <b>9</b>  | N/A      | HUB BODY   |
| <b>10</b> | 99688501 | BEARING KIT 9/12/15 D6T HUB 20x32x7 6804             |
| <b>11</b> | V2252301 | KIT MY16 FRONT AXLE ROAD DISC 9/12/15 INT            |

## TYRES





|           |          |                      |
|-----------|----------|----------------------|
| <b>12</b> | 37805225 | YksionProGripLinkSSC |
|-----------|----------|----------------------|

## ADAPTERS

|          |          |                        |
|----------|----------|------------------------|
| <b>6</b> | B4104301 | ADAPTER Ft 9mm QR QRM+ |
| <b>7</b> | B4104201 | ADAPTER Ft 12mm QRM+   |
| <b>8</b> | B4104401 | ADAPTER Ft 15mm QRM+   |

# MAVIC Ksyrium Pro Carbon SL C Disc

## DELIVERED WITH

|   |   |
|---|---|
| Rim tape  |   |
| Front 12 mm adapters  |   |
| Specific disc bolts   |   |
| User guide  |   |
| Front 12 mm adapters<br>(B4104201)<br>1   |    |
| Rear 12x142mm adapters for Instant Drive 360<br>(B49 896 01 for ID360 6T, B49 899 01 for ID360 CL)<br>1 |    |
| Specific disc bolts   |   |
| Specific disc bolts   |   |
| Rim tape  |   |
| Rim tape  |   |
| Multifunction adjustment wrench<br>(325 423 01)<br>1  |  |
| Multifunction adjustment wrench<br>(325 423 01)<br>1  |  |
| User guide  |   |
| User guide  |   |

## COMPATIBILITY

|   |  |
|---|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies               |  |
| Freewheel: Shimano/Sram or Campagnolo, convertible to XD-R with optional driver body                  |  |
| Front axle: convertible from 12mm thru axle to quick release or 15mm thru axle with optional adapters |  |
| Front axle: convertible from 12mm thru axle to quick release or 15mm thru axle with optional adapters |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters                        |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters                        |  |

## Specifications

### RIMS

- **Material** : 3K carbon fibers
- **Height** : 25mm
- **Drilling** : traditional
- **Material** : 3K carbon fibers
- **Material** : 3K carbon fibers
- Disc brake specific profile
- **Valve hole diameter** : 6.5 mm
- **Tyre** : clincher
- **ETRTO size** : 622x17C
- **Height** : 25mm
- **Height** : 25mm
- **Recommended tyre sizes** : 25 to 52 mm

Downloaded from [Shimano](#) / Update date: 2022-03-01

- **Drilling** : traditional
- **Drilling** : traditional
- Disc brake specific profile

### WHEEL HUB

- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- Sealed cartridge bearings
- **Freewheel** : Instant Drive 360
- **Front and rear bodies** : aluminum
- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- **Front** : Quick release, 12 thru and 15 thru compatible
- **Axle material** : aluminum
- **Rear** : 12x142 (convertible to quick release with optional adapters)
- Sealed cartridge bearings
- Sealed cartridge bearings
- **Freewheel** : Instant Drive 360

### WHEEL WEIGHTS

Wheel weight 725