


ASTM CATEGORY 3 : offroad with jumps less than 61cm  
 Recommended weight limit : 120kg  
 Recommended tire sizes: 28 mm to 62 mm (1.1" to 2.5")  
 Recommended tyre sizes: 36 mm to 64 mm (1.4" to 2.5")

## REFERENCES WHEELS

F54801 XmxPro27.5Ft

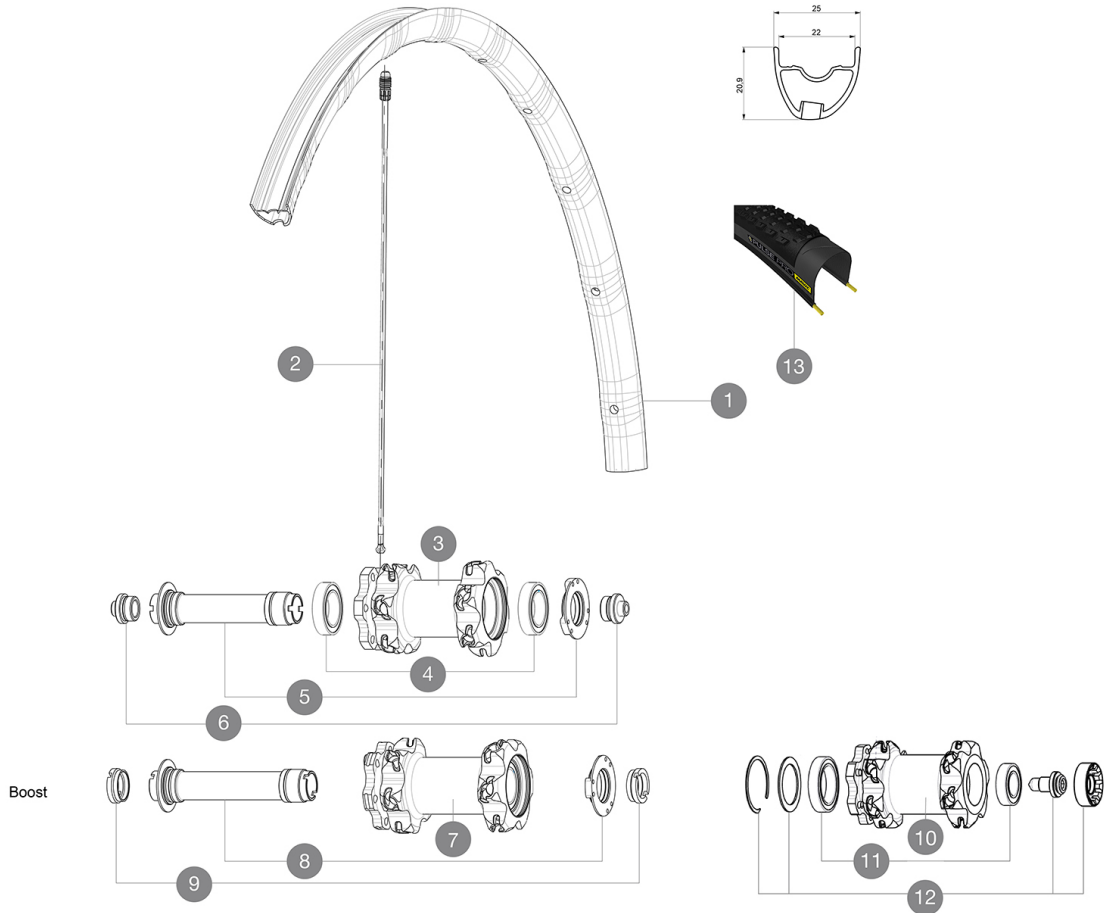

## RIMS



VALVE HOLE (MM): 6,5 :

|   |          |   |
|---|----------|---|
| 1 | V2316010 | KIT FRONT RIM CROSSMAX PRO 27,5" 22mm TSS |
|---|----------|---|

## SPOKES

|   |          |  |
|---|----------|--|
| 2 | V2386401 | KIT 1 275mm 27,5" + 1 293mm 29" CROSSMAX PRO STAMPED BUTTE |
| 2 | V2384701 | KIT 12 FT/NDS CROSSMAX PRO 27,5" SPK 275mm                 |

## HUB SHELLS

|    |          |   |
|----|----------|---|
| 3  | N/A      | HUB BODY                                  |
| 4  | 99688501 | BEARING KIT 9/12/15 D6T HUB 20x32x7 6804  |
| 5  | V2252301 | KIT MY16 FRONT AXLE ROAD DISC 9/12/15 INT |
| 7  | N/A      | HUB BODY                                  |
| 8  | V2370701 | KIT FRONT QRM+ AXLE BOOST INTL 110mm      |
| 10 | N/A      | HUB BODY                                  |
| 11 | M40771   | BEARING KIT FOR LEFTY 50 & 60 HUB         |
| 12 | 36709301 | ASSEMBLY KIT FOR LEFTY SUPERMAX WHEELS    |

## OPTIONS

|          |  |
|----------|--|
| V2650201 | ADAPTER Front Torque Cap 15x31 MTB QRM + |
|----------|--|

## TYRES












|    |          |                |
|----|----------|----------------|
| 13 | 39243121 | Pulse Pro 27.5 |
| 13 | 39243132 | Pulse Pro 27.5 |

## ADAPTERS

|   |          |                        |
|---|----------|------------------------|
| 6 | B4104301 | ADAPTER Ft 9mm QR QRM+ |
| 9 | B4104401 | ADAPTER Ft 15mm QRM+   |

# MAVIC Crossmax Pro

## DELIVERED WITH

|   |   |
|---|---|
| 1 bottle of Mavic Sealant<br>(355 466 01)<br>1  |    |
| BX601 quick releases<br>(V24 503 01 frt, V24 504 01 rear)<br>1                            |    |
| BX601 quick releases<br>(V24 503 01 frt, V24 504 01 rear)<br>1                            |    |
| Front QR adapters<br>(996 941 01 for MTB or B41 043 01 for road)<br>1                     |    |
| Front QR adapters<br>(996 941 01 for MTB or B41 043 01 for road)<br>1                     |    |
| Rear QR adapters for ITS4 and TS2<br>(308 731 01)   |   |
| Rear 12x142mm adapters for ITS4 and TS2<br>(308 593 01 for ITS4, 329 650 01 for TS2)<br>1 |    |
| Rear 12x142mm adapters for ITS4 and TS2<br>(308 593 01 for ITS4, 329 650 01 for TS2)<br>1 |   |
| UST valve and accessories<br>(129 838 01)   |  |
| UST valve and accessories<br>(129 838 01)   |  |
| Multifunction adjustment wrench<br>(325 423 01)<br>1                                      |  |
| Multifunction adjustment wrench<br>(325 423 01)<br>1                                      |  |
| User guide  |   |
| User guide  |   |

## COMPATIBILITY

|   |  |
|---|--|
| Freewheel: Shimano/Sram or XD   |  |
| Freewheel: Shimano/Sram, convertible to XD with optional driver body                |  |
| Front axle: convertible from 15mm thru axle to Quick Release with included adapters |  |
| Front axle: convertible from 15mm thru axle to Quick Release with included adapters |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with included adapters      |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters      |  |

## Specifications

### RIMS

- Material : Mactal
- Material : Mactal
- Joint : SUP
- Joint : SUP
- Drilling : Fore
- Drilling : Fore
- Weight reduction : ISM 4D
- Weight reduction : ISM 4D
- Valve hole diameter : 6.5 mm
- Valve hole diameter : 6.5 mm
- Tire : UST Tubeless and tubetype
- Tire : UST Tubeless and tubetype

Internal width : 22 mm update date: 2022-05-31

Internal width : 22 mm

ETRTO size 27.5" : 584x22ss

### WHEEL HUB

- Front and rear bodies : aluminum
  - Front and rear bodies : aluminum
  - Axle material : aluminum
  - Axle material : aluminum
- Sealed cartridge bearings  
Sealed cartridge bearings
- Freewheel : ITS-4 alloy
  - Freewheel : ITS-4 alloy

### VERSIONS

- Color : Black only
- Color : Black only
- Disc standard : 6 Bolts only
- Disc standard : 6 Bolts only
- Hub width : Boost (front 110, rear 148) or Non-

### WHEEL WEIGHTS

Wheel weight  
Weight Front 27.5": 700  
Weight Front 29": 730