

ASTM CATEGORY 3 : CROSS COUNTRY AND TRAIL RIDING


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 36 mm to 64 mm (1.4" to 2.5")

## REFERENCES WHEELS

F83161 Xmax Elite 27,5 19 Ft Bst Bk

F83151 Xmax Elite 27.5 19 Ft

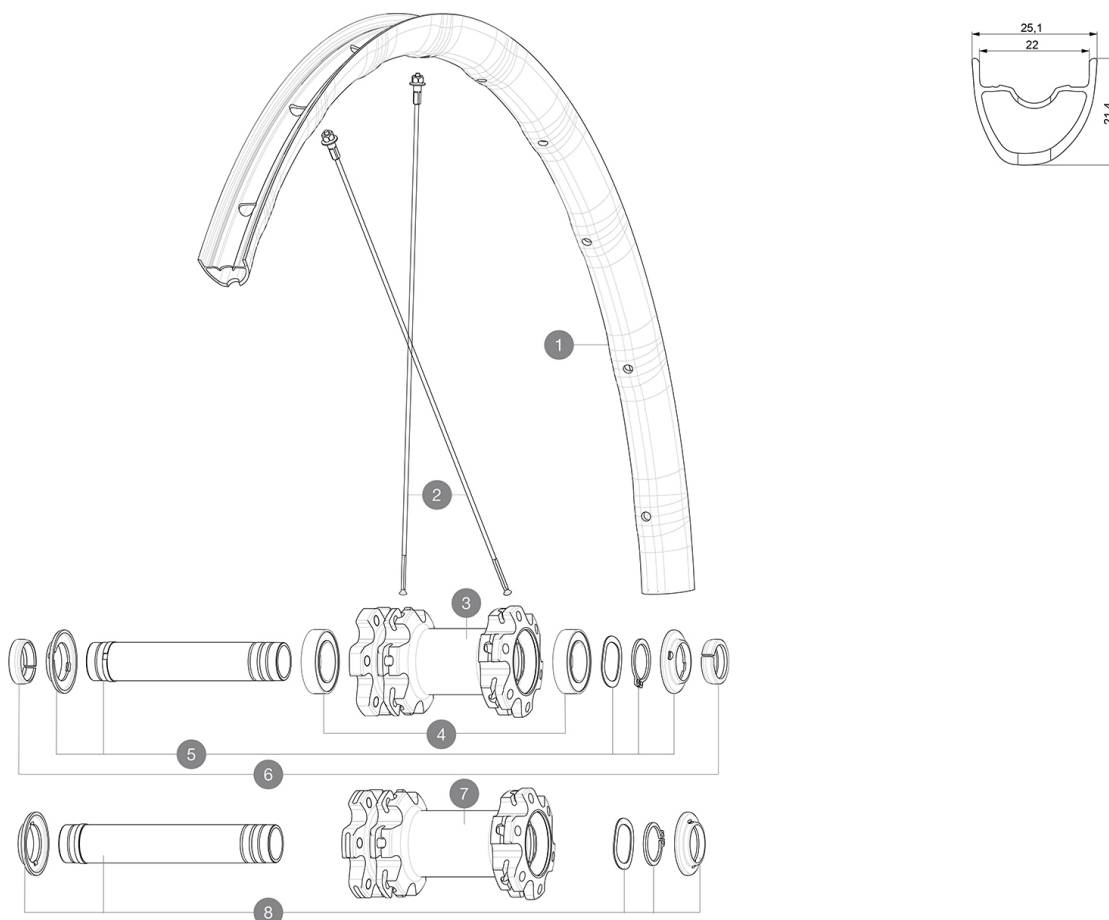

## RIMS



&NBSP;:

|   |          |                                          |
|---|----------|------------------------------------------|
| 1 | V3760415 | KIT FRT/REAR RIM CROSSMAX ELITE 19 27,5" |
|   | V2620101 | UST RIM TAPE 25mm (for 21-24mm wide rim) |

## SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | V2382401 | KIT 12 FT/NDS XRIIDE + FTSX/NDS XMAX EL/XA EL 27,5" SPK 279m |
|---|----------|--------------------------------------------------------------|

## HUB SHELLS

|   |          |                                            |
|---|----------|--------------------------------------------|
| 3 | N/A      | HUB BODY                                   |
| 4 | V2500901 | KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP |
| 5 | V2372301 | KIT 100mm AXLE QRM AUTO MTB > 2019         |
| 7 | N/A      | HUB BODY                                   |
| 8 | V2372401 | KIT 110mm AXLE QRM AUTO MTB > 2019         |



## OPTIONS

|          |                                                       |
|----------|-------------------------------------------------------|
| V2374401 | TORQUE CAPS 15*31 Adapter MTB QRM Auto > 2019 Frt HUB |
|----------|-------------------------------------------------------|

## ADAPTERS

|   |          |                                      |
|---|----------|--------------------------------------|
| 6 | V2372501 | 15mm MTB Axle Cap QRM Auto From 2019 |
|   | 99694101 | ADAPTER Ft 15 to 9mm QR              |

## DELIVERED WITH

|                                           |                                                                                   |
|-------------------------------------------|-----------------------------------------------------------------------------------|
| Front QR adapters (non-boost wheel)       |                                                                                   |
| Front QR adapters (non-boost wheel)       |                                                                                   |
| Rear QR adapters (non-boost wheel)        |                                                                                   |
| Rear QR adapters (non-boost wheel)        |                                                                                   |
| UST valve and accessories<br>(129 838 01) |  |
| UST valve and accessories<br>(129 838 01) |  |
| Tubeless rim tape                         |                                                                                   |
| Tubeless rim tape                         |                                                                                   |

## COMPATIBILITY

|                                                                                                             |  |
|-------------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram or XD                                                                               |  |
| Freewheel: Shimano/Sram or XD                                                                               |  |
| Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel) |  |
| Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel) |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)      |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)      |  |
| Freewheel: Shimano Micro Spline                                                                             |  |
| Freewheel: Shimano Micro Spline                                                                             |  |

## Specifications

### RIMS

- **Material** : Mxstal
- **Material** : Mxstal
- **Joint** : SUP
- **Joint** : SUP
- **Drilling** : traditional
- **Drilling** : traditional
- **Weight reduction** : ISM 4D
- **Weight reduction** : ISM 4D
- **Valve hole diameter** : 6.5 mm
- **Valve hole diameter** : 6.5 mm
- **Tyre** : UST Tubeless and tubetype
- **Tyre** : UST Tubeless and tubetype
- **Internal width** : 22 mm
- **Internal width** : 22 mm
- **ETRTO size 27.5"** : 584x22TSS
- **ETRTO size 27.5"** : 584x22TSS
- **ETRTO size 29"** : 622x22TSS
- **ETRTO size 29"** : 622x22TSS

Hookless profile

Hookless profile

Use with Mavic Tubeless Tape

Use with Mavic Tubeless Tape

### SPOKES

- **Material** : steel
- **Material** : steel
- **Shape** : straight pull, flat, double butted
- **Shape** : straight pull, flat, double butted
- **Count** : 24 front and rear
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2
- **Lacing** : front and rear crossed 2

### WHEEL HUB

- **Front and rear bodies** : aluminum
  - **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
  - **Axle material** : aluminum
- Auto adjust sealed cartridge bearings (QRM Auto), front and rear
- Auto adjust sealed cartridge bearings (QRM Auto), front and rear
- **Freewheel** : Instant Drive 360
  - **Freewheel** : Instant Drive 360

### VERSIONS

- **Color** : Black only
- **Disc standard** : 6 Bolts only
- **Disc standard** : 6 Bolts only
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- **Freewheel** : Shimano/Sram or XD
- **Freewheel** : Shimano/Sram or XD

### WHEEL WEIGHTS

Weight Front 27.5": 723

Weight Front 29": 753