


ASTM CATEGORY 4 : offroad with jumps less than 122cm  
Recommended weight limit : 120kg

**REFERENCES WHEELS**

F52101 XmaxXLProLtd27.5Ft15mmWTS

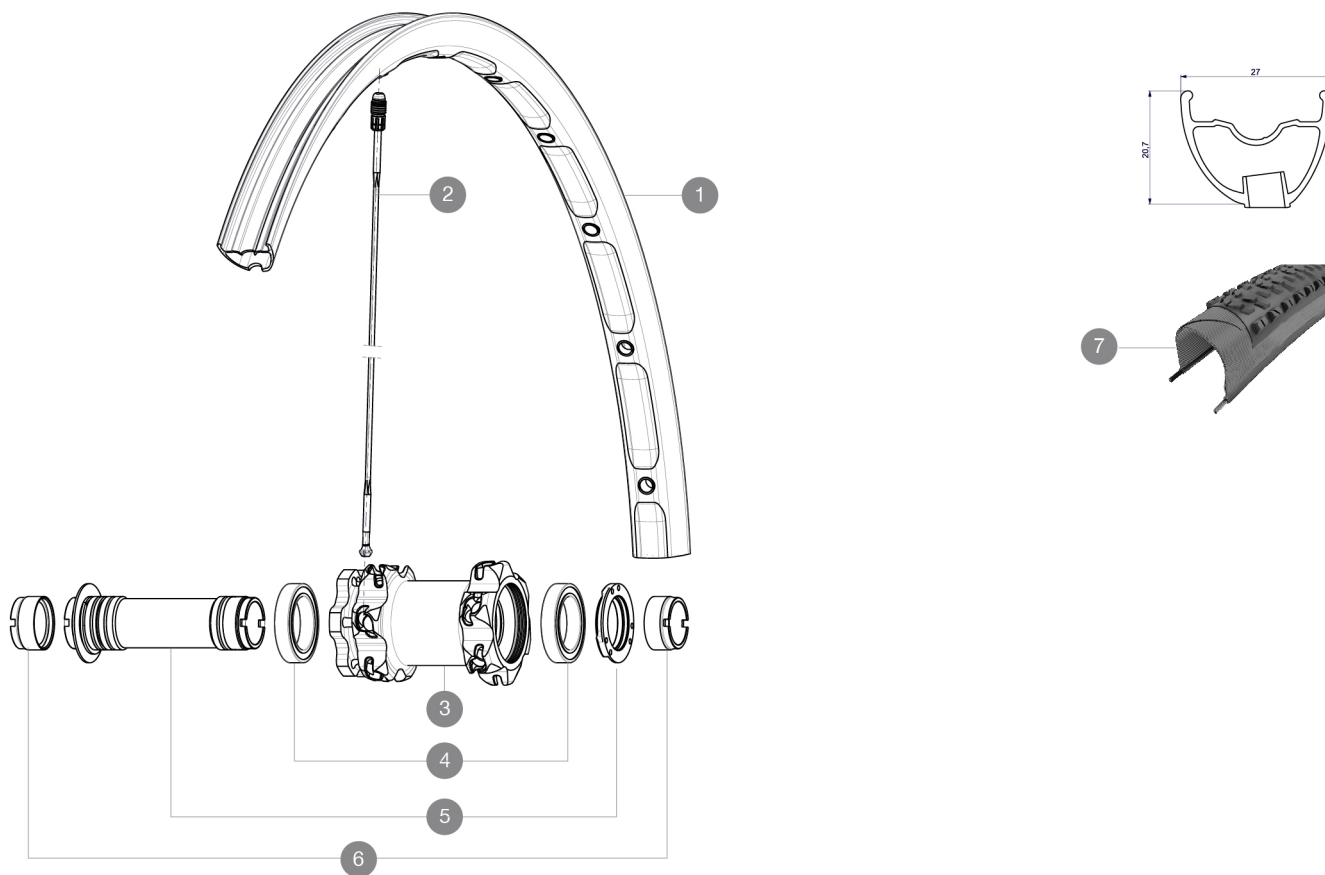

**RIMS**



VALVE HOLE (MM): 6,5 :

1	V2313910	"KIT FRONT RIM CROSSMAX XL PRO LTD 27,5""
---	----------	-------------------------------------------

**SPOKES**

2	V2383301	KIT 2 STAMP SPOKE CROSSMAX XL PRO Ltd 27,5"
2	36674901	KIT 12 FT XMAX END/FT-NDS DEEMAX PRO 27,5" ALU SPK 275mm

**HUB SHELLS**

3	N/A	HUB BODY
3	N/A	HUB BODY
4	M40179	FRONT BEARING 25x37x7 20mm AXLE
5	30870501	FRONT AXLE 20mm CROSSMAX + DEEMAX ULTI 2012

**ADAPTERS**

6	12982901	ADAPTER Ft 20x110mm
---	----------	---------------------

**MAVIC** *Crossmax XL Pro Ltd 27.5***DELIVERED WITH**

2 bottles of Mavic Sealant	
UST valve and accessories	
Front 15 mm adapters	
Rear 12x142mm adapters	
User guide	

**Specifications****RIMS**

- **Drilling** : Fore  
Disc brake specific profile
- **Weight reduction** : ISM
- **Tyre** : UST Tubeless and tubetype
- **Internal width** : 23 mm
- **ETRTO size 27.5"** : 584x23C
- **ETRTO recommended tyre sizes** : 37mm to 76mm (1.5" to 3.0")

**SPOKES**

- **Material** : Zicral
- **Shape** : straight pull, bladed
- **Count** : 24 front and rear
- **Lacing** : front crossed 2, rear Isopulse

**WHEEL HUB**

- **Body** : aluminum
- **Axle material** : aluminum  
Adjustable sealed cartridge bearings
- **Freewheel** : ITS-4 alloy  
Shimano 11 speeds compatible  
Sram XD Compatible (XX1-X01) with optional kit

**WHEEL WEIGHTS**

Wheel weight 815