MAVIC Aksium Elite

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm
Recommended weight limit : 120kg
Recommended tire sizes: 25 to 32 mm
Max. Pressure: 23mm 8.7 bars - 125 psi, 25/28mm 7.7 bars - 110 psi
Max. Pressure: 25/28mm 7.7 bars - 110 PSI

REFERENCES WHEELS

F54501	Aksium Elite 17 Ft

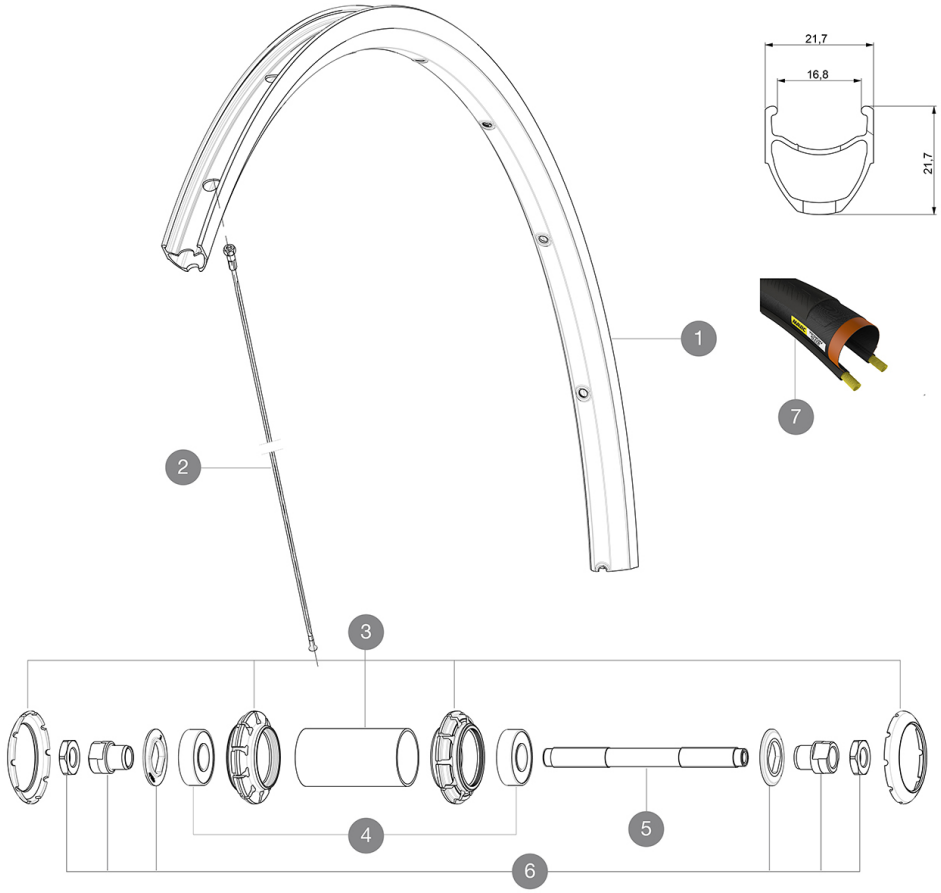

RIMS

 :

1	V2735015	KIT FRONT/REAR RIM AKSIUM ELITE UST UB SUP
1	V2408615	KIT FRONT/REAR RIM AKSIUM ELITE 17C - while stock last

SPOKES

2	V4160101	Kit 10 stainless spokes 285 Ft Ksyrium Equipe S/Ft & NDS Aks
2	10844901	KIT 10 FT KSYRIUM EQ S/FT+NDS AKSIUM SPK 285mm - while stock

HUB SHELLS

3	12034401	KIT 3 HUB CAPS AERO 10 SLOTS BLACK
4	M40318	KIT 2 HUB BEARINGS 6001
5	99603701	FRONT AXLE QRM ROAD 2008
6	99603801	SHORT EXPENSIBLE BEARING SUPPORTS > 2008

TYRES

7	37805625	Yksion EliteGuard White
7	37805628	Yksion EliteGuard White

Download date: 2024-07-16 / Update date: 2022-03-01

MAVIC Aksium Elite

DELIVERED WITH

BR101 quick releases (M40350 frt, M40351 rear road, M40352 rear MTB) 1	
BR101 quick releases (M40350 frt, M40351 rear road, M40352 rear MTB) 1	
Rim tape	
Rim tape	
User guide	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body	
Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body	
Front axle: Quick Release only	
Front axle: Quick Release only	
Rear axle: Quick Release only	
Rear axle: Quick Release only	

Specifications

RIMS

- **Material :** S6000 Aluminum
- **Material :** S6000 Aluminum
- **Height :** 21 mm
- **Height :** 22 mm
- **Joint :** sleeved
- **Joint :** sleeved
- **Drilling :** traditional with H2 reinforcement
- **Drilling :** traditional with H2 reinforcement
- **Brake track :** UB Control
- **Brake track :** UB Control
- **Valve hole diameter :** 6.5 mm
- **Valve hole diameter :** 6.5 mm
- **Tire :** clincher
- **Tire :** clincher
- **Internal width :** 17 mm
- **Internal width :** 17 mm
- **ETRTO size :** 622x17C
- **ETRTO size :** 622x17C

SPOKES

- **Material :** steel
- **Material :** steel
- **Shape :** straight pull, bladed
- **Shape :** straight pull, bladed
- **Nipples :** steel, ABS
- **Nipples :** steel, ABS
- **Count :** 20 front and rear
- **Count :** 20 front and rear
- **Lacing :** radial front and rear non-drive side, crossed 2 rear drive side
- **Lacing :** radial front and rear non-drive side, crossed 2 rear drive side

WHEEL HUB

- **Front and rear bodies :** aluminum
- **Front and rear bodies :** aluminum
- **Axle material :** steel
- **Axle material :** steel

Sealed cartridge bearings
Sealed cartridge bearings

- **Freewheel :** FTS-L steel
- **Freewheel :** FTS-L steel

VERSIONS

- **Color :** Black only
- **Color :** Black only

WHEEL WEIGHTS

Wheel weight 815

Download date: 2024-07-16 / Update date: 2022-03-01