# MAVIC Crossmax 29

ASTM CATEGORY 3 : CROSS COUNTRY AND TRAIL RIDING
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

## REFERENCES WHEELS

| | | | |
|---|---|---|---|
| F73291 | Xmx29Ft | P86381 | Crossmax 29 Pr Bst |
| F73741 | Xmx29FtBst | P86601 | Crossmax29PrBstXD |

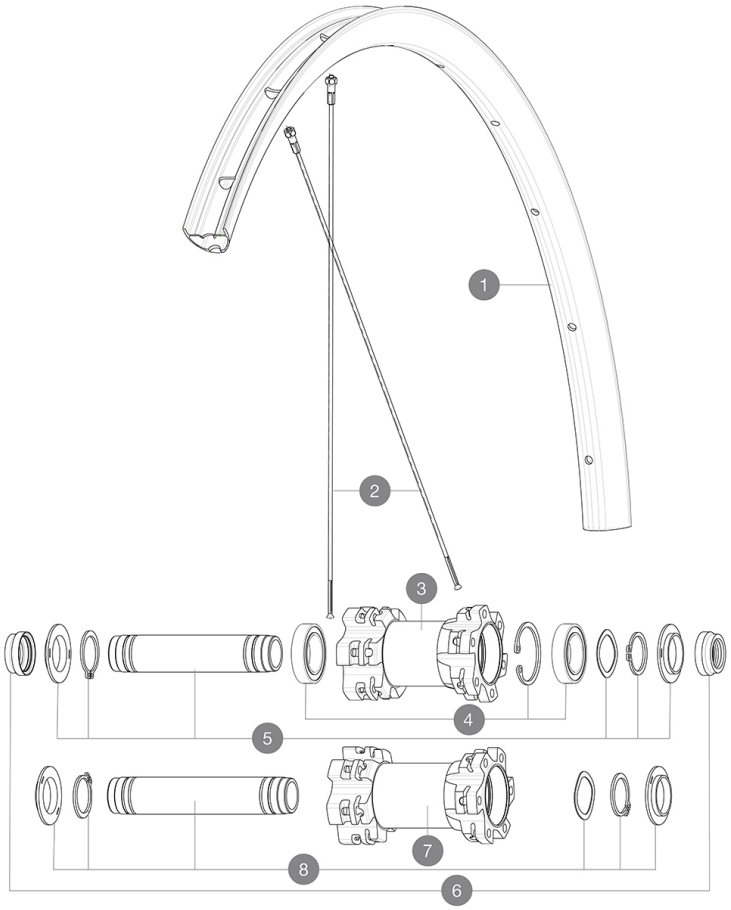





## RIMS

 :

| | | |
|---|---|---|
| 1 | V2317915 | KIT FRONT/REAR RIM CROSSMAX 29'' 22TSS |
| | V2620101 | UST RIM TAPE 25mm (for 21-24mm wide rim) |

## SPOKES

| | | |
|---|---|---|
| 2 | 36690301 | "KIT 12 FT/NDS XONE/XMAX - XA 29""/AKSIUM DISC 9 + 12 FT/AKS |

## HUB SHELLS

| | | |
|---|---|---|
| 3 | N/A | HUB BODY |
| 4 | 99688501 | BEARING KIT 9/12/15 D6T HUB 20x32x7 6804 |
| 5 | V2371901 | KIT FRONT AXLE MTB L1 QRM AUTO 15x100mm |
| 7 | N/A | HUB BODY |
| 8 | V2372001 | KIT FRONT AXLE MTB L1 QRM AUTO BOOST 15x110mm |

## ADAPTERS

| | | |
|---|---|---|
| 6 | V2390801 | KIT 2 FORK RESTS FRONT AXLE MTB QRM AUTO |
| | 99694101 | ADAPTER Ft 15 to 9mm QR |

Download date: 2024-07-16 / Update date: 2023-03-21

# MAVIC Crossmax 29

## DELIVERED WITH

| | |
|---|---|
| UST valve and accessories (129 838 01) | |
| Tubeless rim tape | |
| User guide | |

## COMPATIBILITY

| | |
|---|---|
| Freewheel: Shimano/Sram or XD | |
| Front axle: convertible from 15mm thru axle to Quick Release with optional adapters | |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters | |

## Specifications

### RIMS

- **Material :** S6106 alloy
- **Joint :** SUP
- **Drilling :** traditional
- **Valve hole diameter :** 6.5 mm
- **Tyre :** UST Tubeless and tubetype
- **Internal width :** 22 mm
- **ETRTO size 27.5" :** 584x22TSS
- **ETRTO size 29" :** 622x22TSS

Use with Mavic Tubeless Tape

### SPOKES

- **Material :** steel
- **Shape :** straight pull, round
- **Count :** 24 front and rear
- **Lacing :** front and rear crossed 2

### WHEEL HUB

- **Front and rear bodies :** aluminum
- **Axle material :** aluminum
- **Front bearings :** auto adjust sealed cartridge bearings (QRM Auto), Rear bearings sealed cartridge bearings (QRM)
- **Freewheel :** TS-2 alloy

### VERSIONS

- **Color :** Black only
- **Disc standard :** 6 Bolts only
- **Hub width :** Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)

### WHEEL WEIGHTS

Download date: 2024-07-16 / Update date: 2023-03-21