MAVIC Deemax Pro 29

ASTM CATEGORY 4 : ENDURO AND TRAIL RIDING
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included
Recommended tyre sizes: 46mm to 64mm (1.8" to 2.5")

REFERENCES WHEELS

F81721	Deemax Pro 29 19 Ft 20x110	F81731	Deemax Pro 29 19 Ft Bst 15x110

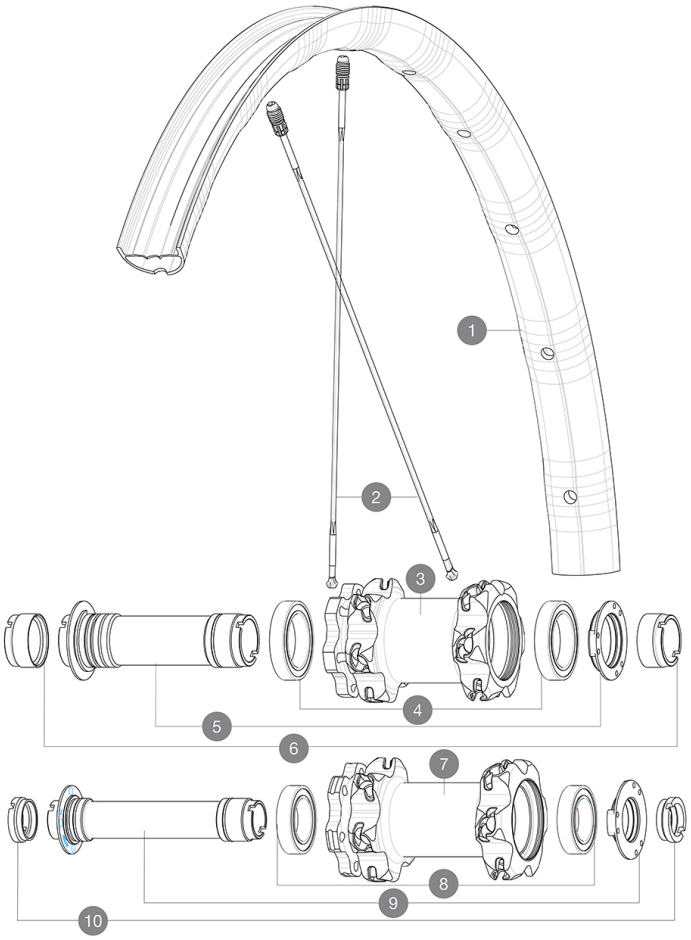



RIMS

 :

1	V3762310	KIT FRONT RIM DEEMAX PRO 19 29''

SPOKES

2	V3820601	KIT 2 FRT/NDS STAMPED SPOKE 293mm DEEMAX PRO 29'' - while st
2	A7209901	KIT 12 FT/NDS CROSSMAX XL/DEEMAX PRO 19 29'' SPK 293mm

HUB SHELLS

3	N/A	HUB BODY
4	M40179	FRONT BEARING 25x37x7 20mm AXLE
5	30870501	FRONT AXLE 20mm CROSSMAX + DEEMAX ULTI 2012
7	N/A	HUB BODY
8	99688501	BEARING KIT 9/12/15 D6T HUB 20x32x7 6804
9	V2370701	KIT FRONT QRM+ AXLE BOOST INTL 110mm

OPTIONS

	V2650201	ADAPTER Front Torque Cap 15x31 MTB QRM +

ADAPTERS

6	12982901	ADAPTER Ft 20x110mm
10	B4104401	ADAPTER Ft 15mm QRM+
	B4104301	ADAPTER Ft 9mm QR QRM+
	12982801	ADAPTER Ft 20 to 15mm
	12982701	ADAPTER Ft 20 to 9mm QR incl.

Download date: 2024-07-16 / Update date: 2022-04-14

MAVIC Deemax Pro 29

DELIVERED WITH

UST valve and accessories (129 838 01)	
Specific disc bolts (308 719 01)	
Multifonction adjustment wrench (325 423 01)	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram or XD	
Front axle: 20mm, convertible to 15mm thru axle with included adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	
Freewheel: Shimano Micro Spline	

Specifications

RIMS

- **Material :** Maxtal
- **Drilling :** Fore
- **Weight reduction :** ISM 4D
- **Valve hole diameter :** 6.5 mm
- **Tyre :** UST Tubeless and tubetype
- **Internal width :** 28 mm

Hookless profile

SPOKES

- **Material :** Zicral
- **Shape :** straight pull, flat
- **Nipples :** Fore integrated aluminum
- **Count :** 24 front and rear
- **Lacing :** front crossed 2, rear Isopulse

WHEEL HUB

- **Front and rear bodies :** aluminum
- **Front bearings :** adjustable sealed cartridge bearings (QRM+), Rear bearings auto adjust sealed cartridge bearings (QRM Auto)
- **Freewheel :** Instant Drive 360

VERSIONS

- **Disc standard :** 6 Bolts only
- **Hub width :** Boost only (front 110, rear 148)
- **Freewheel :** Shimano/Sram or XD

WHEEL WEIGHTS

Download date: 2024-07-16 / Update date: 2022-04-14