

### ASTM CATEGORY 3 : CROSS COUNTRY

Maximum tyre pressure: 4.1bar/59PSI with a 28mm tyre - 2.45bar/36PSI with a 64mm tyre

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included


Non-Boost : 12x135 rear axle adapters ([V2510901])

Boost : Torque Caps for Center Lock hub ([V2374401])

### REFERENCES WHEELS

F93071 XMAXSLULT 25 INT 29 BST

F93081 XMAXSLULT 25 CL 29 BST

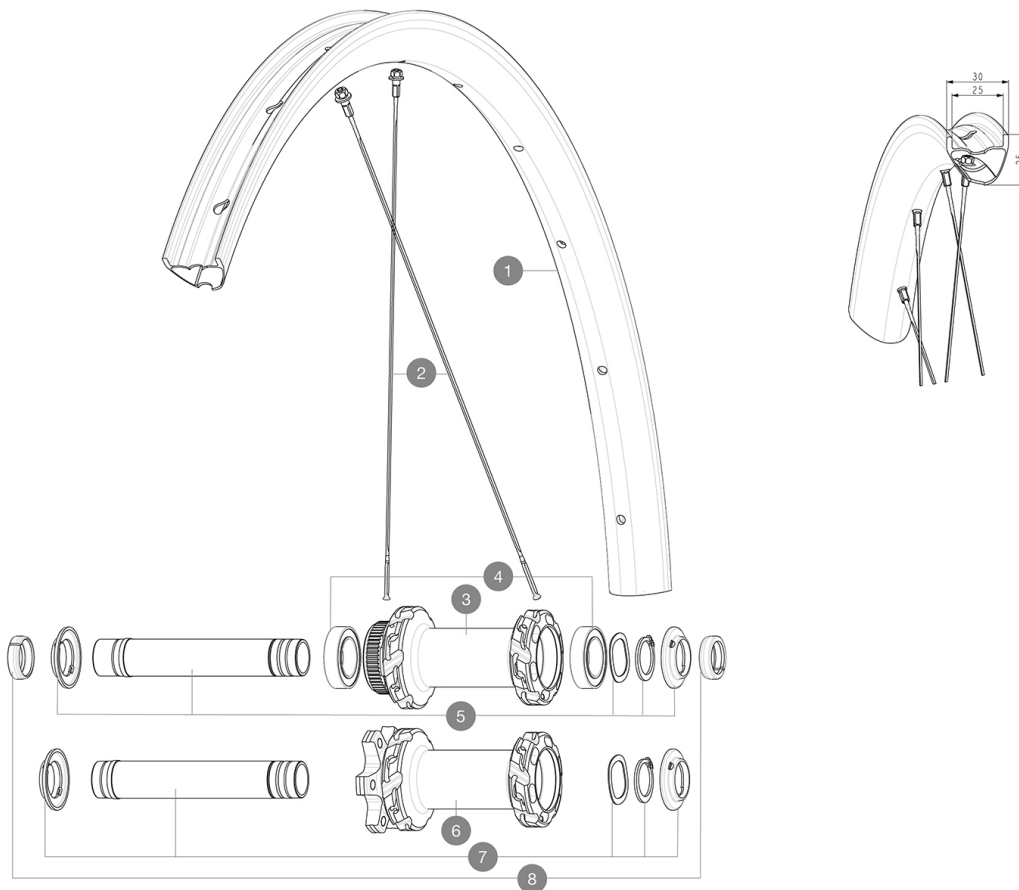

### RIMS



&NBSP;:

|   |           |                                                |
|---|-----------|------------------------------------------------|
| 1 | V00004831 | Kit Front/Rear rim Crossmax SL Ultimate 29" 22 |
|   | V2700101  | UST Tape 28mm for 25 to 27mm wide rims         |

### SPOKES

|   |           |                                                           |
|---|-----------|-----------------------------------------------------------|
| 2 | V2389101  | Kit 12Fr/Rr XmaxSL Ultimate spk293+np&w while stock lasts |
| 2 | V00065231 | Kit12Fr/Rr MTBcarb29 ss spk293                            |

### HUB SHELLS

|   |          |                                            |
|---|----------|--------------------------------------------|
| 3 | N/A      | HUB BODY                                   |
| 4 | V2500901 | KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP |
| 5 | V2375601 | Kit 110mm axle QRM auto MTB from 2019 DCL  |
| 6 | N/A      | HUB BODY                                   |
| 7 | V2372401 | KIT 110mm AXLE QRM AUTO MTB > 2019         |

### OPTIONS

V2374401

TORQUE CAPS 15\*31 Adapter MTB QRM Auto > 2019 Frt HUB

### ADAPTERS

8

V2372501

15mm MTB Axle Cap QRM Auto From 2019

99694101

ADAPTER Ft 15 to 9mm QR



# CROSSMAX SL ULTIMATE 25 29

2022  
FRONT

DELIVERED WITH

|                                                                             |  |
|-----------------------------------------------------------------------------|--|
| User guide                                                                  |  |
| Wheelbag<br>(V24 801 01)                                                    |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| Pre-installed tubeless rim tape                                             |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Wheelbag<br>(V24 801 01)                                                    |  |
| Wheelbag<br>(V24 801 01)                                                    |  |
| User guide                                                                  |  |
| Pre-installed tubeless rim tape                                             |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| 2 replacement spokes with each wheel                                        |  |
| 12 to 9mm rear adapter for quick release<br>(V2510801)                      |  |
| 2 replacement spokes with each wheel                                        |  |
| 2 replacement spokes with each wheel                                        |  |

COMPATIBILITY

|                                                                                 |  |
|---------------------------------------------------------------------------------|--|
| Freewheel body: convertible SHIMANO MS (kit V3990101 sold separately)           |  |
| Freewheel body: convertible SHIMANO MS (kit V3990101 sold separately)           |  |
| Front axle: 15x110 Boost thru axle                                              |  |
| Front axle: 15x110 Boost thru axle                                              |  |
| Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately) |  |
| Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately) |  |
| Boost 20 to 15mm front adapter ([12982801]                                      |  |
| Front axle: for fixing nuts only (included), M9x1 thread                        |  |
| Rear axle adapters: 12x148 convertible to 9x141 (kit V2510801 sold separately)  |  |
| Rear axle adapters: 12x148 convertible to 9x141 (kit V2510801 sold separately)  |  |
| Rear axle: 12x148 Boost thru axle                                               |  |
| Front axle: 15x110 Boost thru axle                                              |  |
| Front axle: for fixing nuts only (included), M9x1 thread                        |  |

Specifications

RIMS

- **Material** : 100% carbon fiber with UDÂ² external layer
- **Material** : 100% carbon fiber with UDÂ² external layer
- **Material** : 100% carbon fiber with UDÂ² external layer
- **Height** : 25 mm
- **Height** : 25 mm
- **Drilling** : traditional
- **Internal width** : 25 mm

WHEEL HUB

- **Body** : aluminum
- **Body** : aluminum
- Infinity hubs
- Instant Drive 360 freewheel technology
- QRM Auto bearing preload technology
- Hub available with 6-bolt or Center LockÂ® brake rotors
- **Axles** : Front 15X110 Boost ; Rear 12X148 Boost
- **Body design** : INFINITY
- **Body design** : INFINITY

WHEEL WEIGHTS

615