


ASTM CATEGORY 3 : offroad with jumps less than 61cm  
Recommended weight limit : 120kg

## REFERENCES WHEELS

R99141 XrdLight27.5Rr Boost WTS

R60901 Xride Light27.5Rr WTS

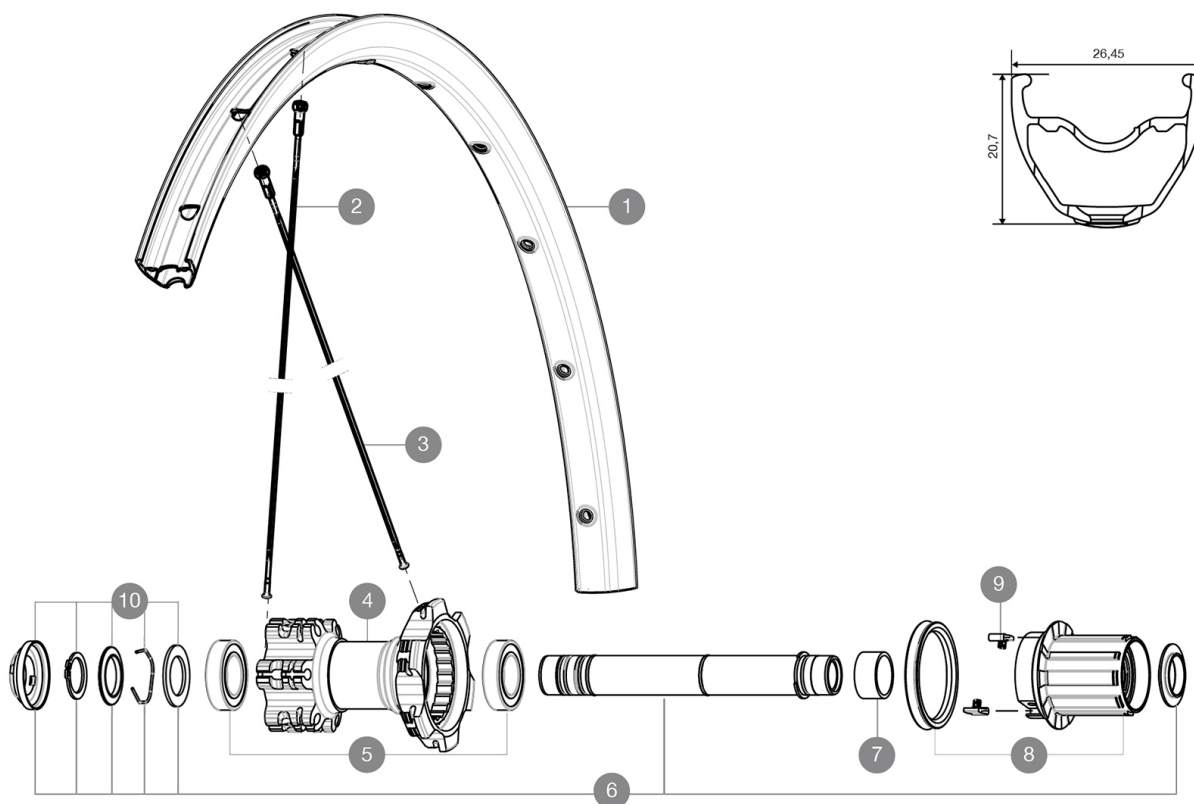

## RIMS



VALVE HOLE (MM): 8,5 WITH POP OFF REDUCER :

1 V2314515 "KIT FRONT/REAR RIM CROSSRIDE LIGHT 27,5""

## SPOKES

2 V2381801 KIT 12 FT/NDX XRIE LIGHT 27,5" SPK 277mm  
3 V2382001 KIT 12 DS CROSSRIDE LIGHT 27,5" SPOKE 275mm

## HUB SHELLS

4 N/A HUB BODY  
5 M40076 HUB BEARINGS 17x30x7 6903 x 2  
6 V2371201 KIT REAR QRM AXLE 135-142 / BOOST 148mm  
7 35124501 SET OF 3 REAR AXLE/FREEWHEEL BODY SPACERS MTB L1  
8 35126301 TS-2 FREEWHEEL BODY + SEAL 2013 (NO PAWLS) - while stock las  
9 99610601 PAWLS KIT FOR ITS-4 (OR TS-2)  
10 V2370401 KIT REAR AUTO ADJUSTING PLAY 12mm AXLE



# Crossride Light WTS 27.5

2016  
REAR

DELIVERED WITH

|                                                                                           |  |
|-------------------------------------------------------------------------------------------|--|
| Rim tape                                                                                  |  |
| Rear 12x142mm adapters                                                                    |  |
| User guide                                                                                |  |
| Rear 12x142mm adapters for ITS4 and TS2<br>(308 593 01 for ITS4, 329 650 01 for TS2)<br>1 |  |
| Rim tape                                                                                  |  |
| User guide                                                                                |  |

COMPATIBILITY

|                                                                                     |  |
|-------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to XD with optional driver body                |  |
| Front axle: convertible from 15mm thru axle to Quick Release with optional adapters |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters      |  |

Specifications

RIMS

- **Joint** : sleeved
- **Drilling** : traditional
- Disc brake specific profile
- **Valve hole diameter** : 8,5 mm with pop off reducer
- **Tyre** : tubetype
- **Internal width** : 21 mm
- **ETRTO size 26"** : 559x21C
- **ETRTO size 27.5"** : 584x21C
- **ETRTO size 29"** : 622x21C
- **Joint** : sleeved
- **Drilling** : traditional
- Disc brake specific profile
- **Valve hole diameter** : 8,5 mm with pop off reducer
- **Tyre** : tubetype
- **Internal width** : 21 mm
- **ETRTO size 26"** : 559x21C
- **ETRTO size 27.5"** : 584x21C
- **ETRTO size 29"** : 622x21C

SPOKES

- **Material** : steel
- **Shape** : straight pull, bladed, double butted
- **Nipples** : brass, ABS
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2
- **Material** : steel
- **Shape** : straight pull, bladed, double butted
- **Nipples** : steel, ABS
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2

WHEEL HUB

- **Freewheel** : TS-2 alloy
- **Front and rear bodies** : aluminum
- **Freewheel** : TS-2 alloy

VERSIONS

- **Color** : Black only
- **Disc standard** : 6 Bolts only
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)

WHEEL WEIGHTS

Wheel weight  
Weight Rear 26": 970  
Weight Rear 27.5": 1000  
Weight Rear 29": 1050