

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included


Recommended tyre sizes: 25 to 32 mm

Max. Pressure tubeless: 25mm 6 bars - 87 PSI, 28mm 5 bars - 70 PSI. Max pressure tubetype: 25mm 7 bars - 102 PSI

## REFERENCES WHEELS

R20481 KsyEI UST D6B12x142Rr

R20491 KsyEI UST DCL12x142Rr

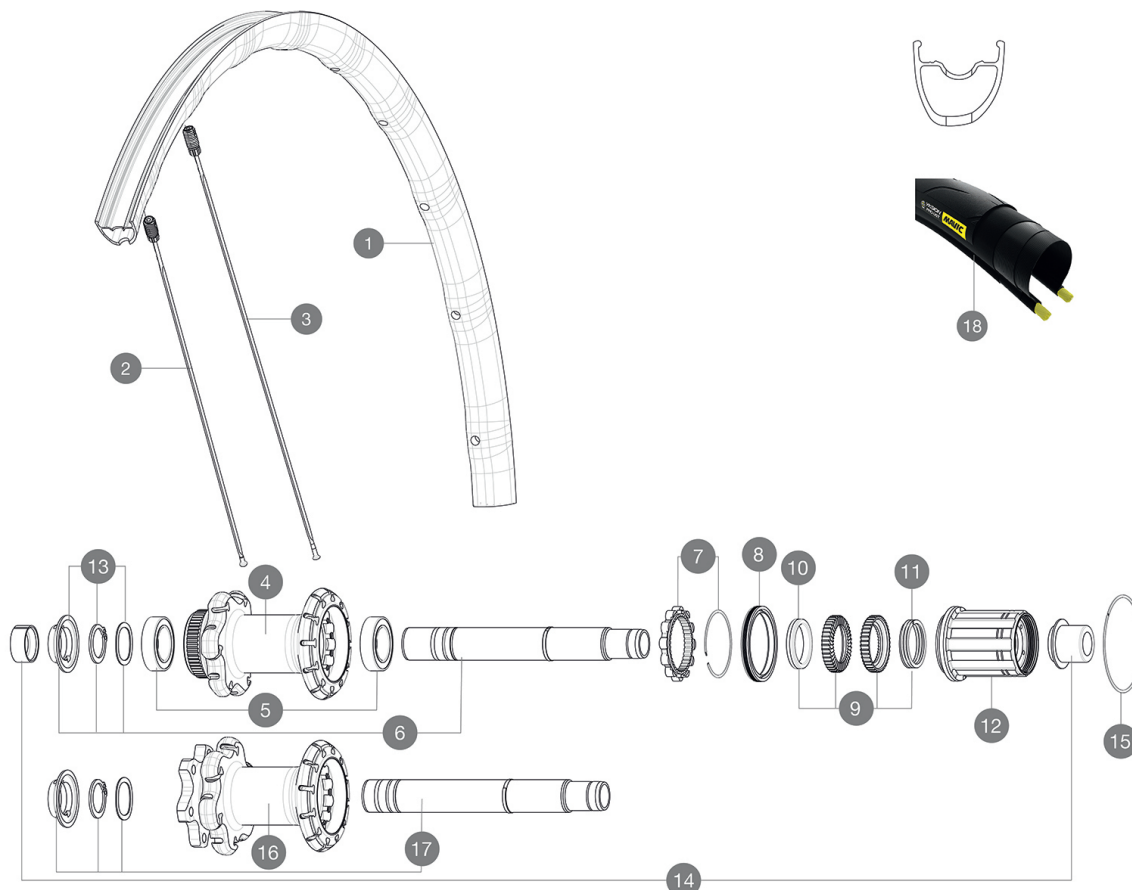

## RIMS



&NBSP;:

1 V2731113 KIT REAR RIM KSYRIUM ELITE DISC UST

## SPOKES

2 V2273401 KIT 12 FRT/NON DRIVE SIDE BUTTED SPOKE 297mm  
3 V2273501 KIT 12 DRIVE SIDE BUTTED SPOKE 280mm

## HUB SHELLS

4 N/A HUB BODY  
5 V2560401 KIT 2 BEARINGS 17x28x7 + WAVED WASHER + CLIP  
6 V2252901 KIT ID360 CENTER LOCK 135/142mm AXLE W/CLIP  
7 V2252701 KIT ID360 INSERT SHAPED EAR LOBE > 2017  
8 V2251601 KIT ID360 SEAL + GREASE  
9 V2251701 KIT ID360 2 RATCHETS + SPRING + GREASE  
10 V2500501 KIT ID360 3 PADS NOISE REDUCING  
11 V2251801 KIT 3 ID360 ROAD SPRINGS  
12 V3430101 HG11 Freewheel Body ID360  
15 V2252201 KIT 2 REAR HUB RETENTION RINGS 48mm  
16 N/A HUB BODY  
17 V2253001 KIT ID360 6 BOLTS 135/142mm AXLE WITH CIRCLIP

## TYRES

18 39938825 Yksion Pro UST 700x25

## ADAPTERS

14 V2510701 ID360V2RrAxleAdapt12x142/148  
V2510801 ID360 V2 RrAxleAdapt9x135  
V2510901 ID360 EVO RrAxleAdpt12x135/150

# MAVIC Ksyrium Elite Disc UST

## DELIVERED WITH

|                                                                  |  |
|------------------------------------------------------------------|--|
| Mavic tyre sealant (rear wheel)<br>(355 466 01)                  |  |
| Mavic tyre sealant (rear wheel)<br>(355 466 01)                  |  |
| Tyre sealant syringe                                             |  |
| Tyre sealant syringe                                             |  |
| Front QR adapters<br>(996 941 01 for MTB or B41 043 01 for road) |  |
| Rear QR adapters for Instant Drive 360<br>(B49 894 01)           |  |
| UST valve and accessories<br>(129 838 01)                        |  |
| UST valve and accessories<br>(129 838 01)                        |  |
| Specific disc bolts<br>(308 719 01)                              |  |
| User guide                                                       |  |
| User guide                                                       |  |

## COMPATIBILITY

|                                                                                                                                                      |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies                                                              |  |
| Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies                                                              |  |
| Front axle: 12mm thru axle. Optional: Easily convertible to quick release with adequate adapters, convertible to 15mm with complete axle replacement |  |
| Front axle: 12mm thru axle, easily convertible to quick release with included adapters. Convertible to 15mm with complete axle replacement           |  |
| Front axle: 12x100 thru axle, easily convertible to quick release with included adapters. Not compatible with 15mm through axles.                    |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters (not available in Germany)                                            |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with included adapters                                                                       |  |

## Specifications

### RIMS

- **Material** : Mxtral
- **Material** : Mxtral
- **Height** : 22 mm
- **Height** : 22 mm
- **Joint** : SUP
- **Joint** : SUP
- **Drilling** : Fore
- **Drilling** : Fore
- Disc brake specific profile
- Disc brake specific profile
- **Weight reduction** : ISM 4D
- **Weight reduction** : ISM 4D
- **Valve hole diameter** : 6.5 mm
- **Valve hole diameter** : 6.5 mm
- **Tyre** : UST Tubeless and tubetype
- **Tyre** : UST Tubeless and tubetype
- **Internal width** : 19 mm
- **Internal width** : 19 mm
- **ETRTO size** : 622x19TC Road
- **ETRTO size** : 622x19TC Road

### SPOKES

- **Material** : steel
- **Material** : steel
- **Shape** : straight pull, bladed
- **Shape** : straight pull, bladed
- **Nipples** : Fore integrated aluminum
- **Nipples** : Fore integrated aluminum
- **Count** : 24 front and rear
- **Count** : 24 front and rear

### WHEEL HUB

- **Front and rear bodies** : aluminum
- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- **Axle material** : aluminum
- **Front bearings** : adjustable sealed cartridge bearings (QRM+), Rear bearings auto adjust sealed cartridge bearings (QRM Auto)
- **Front bearings** : adjustable sealed cartridge bearings (QRM+), Rear bearings auto adjust sealed cartridge bearings (QRM Auto)
- **Freewheel** : Instant Drive 360
- **Freewheel** : Instant Drive 360
- **Front** : Quick release, 12x100 and 15x100 through axle compatible
- **Rear** : Quick Release, 12x142 and 12x135 compatible

### VERSIONS

- **Color** : Black only
- **Disc standard** : 6 Bolts or Center Lock(R)
- **Disc standard** : Center Lock(R) only

### WHEEL WEIGHTS

900