

ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included


Recommended tyre sizes: 60mm to 76mm (2.35" to 3.0")

Maximum tyre pressure: 3.2bar/46PSI with a 47mm tyre - 2.85bar/41PSI with a 64mm tyre

## REFERENZEN RÄDER

F92221 Deemax 27,5 21 Ft

F92231 DEEMAX INT 27,5 BST

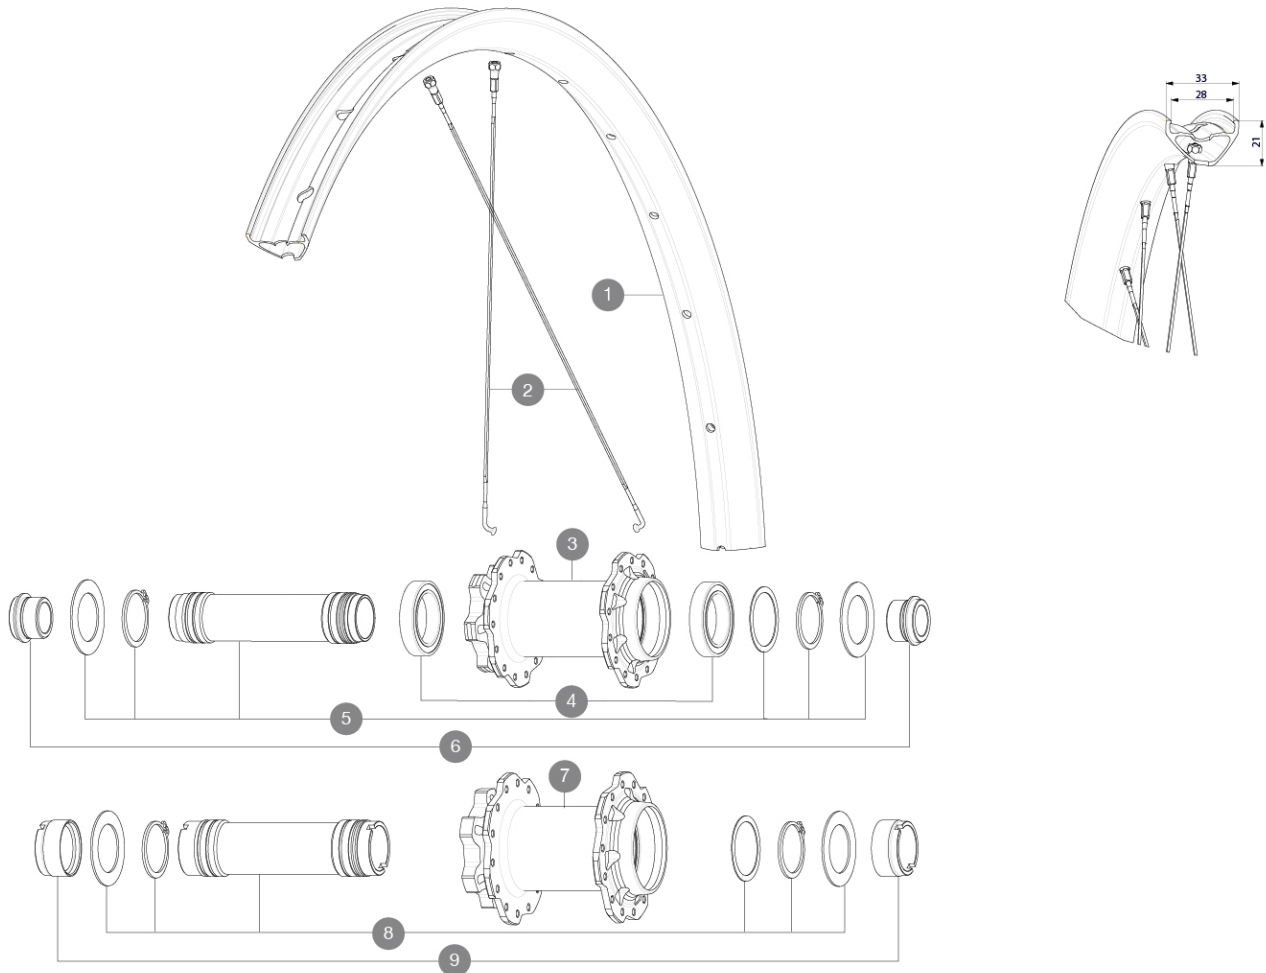

## RIMS



&NBSP::

|   |          |                                            |
|---|----------|--------------------------------------------|
| 1 | V2640101 | UST RIM TAPE 32mm for 28 to 29mm wide rims |
|   | V3766315 | Kit Front/Rear rim Deemax 21 27,5"         |

## SPOKES

|   |          |                                                             |
|---|----------|-------------------------------------------------------------|
| 2 | V2388001 | KIT 14 J BENT STEEL SPOKES 281mm DEEMAX DH 27,5" + black st |
|---|----------|-------------------------------------------------------------|

## HUB SHELLS

|   |          |                                             |
|---|----------|---------------------------------------------|
| 3 | N/A      | NABENKÖRPER                                 |
| 4 | M40179   | FRONT BEARING 25x37x7 20mm AXLE             |
| 5 | V2373701 | KIT 20x110mm BOOST AXLE QRM AUTO MTB > 2019 |
| 7 | N/A      | NABENKÖRPER                                 |
| 8 | V2373801 | KIT 20x110mm AXLE QRM AUTO MTB > 2019       |

## ADAPTERS

|   |          |                                               |
|---|----------|-----------------------------------------------|
| 6 | 12982801 | 15mm ADAPTER KIT - 2012 WHEELS                |
| 9 | 12982901 | 20mm adapter for Crossmax ST/SX (front wheel) |



# DEEMAX 27,5

## GELIEFERT MIT

|                                                                                                                                                                   |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| 2 replacement spokes with each wheel                                                                                                                              |  |
| Boost-Adapter (20x110 mm)  im Lieferumfang eines Boost-VR enthalten              |  |
| HR-Achsstummel 12x150 mm  bei HR mit 12x157-mm-Achse im Lieferumfang enthalten   |  |
| Non-Boost-Adapter (20x110 mm)  im Lieferumfang eines Non-Boost-VR enthalten      |  |
| UST valve and accessories<br>(129 838 01)                                                                                                                         |  |
| UST valve and accessories<br>(129 838 01)                                                                                                                         |  |
| UST valve and accessories<br>(129 838 01)                                                                                                                         |  |
| Pre-installed tubeless rim tape                                                                                                                                   |  |
| Pre-installed tubeless rim tape                                                                                                                                   |  |
| Pre-installed tubeless rim tape                                                                                                                                   |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01)                                                                                       |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01)                                                                                       |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01)                                                                                       |  |
| Boost-Adapter (20x110 mm)  im Lieferumfang eines Boost-VR enthalten            |  |
| Non-Boost-Adapter (20x110 mm)  im Lieferumfang eines Non-Boost-VR enthalten    |  |
| 2 replacement spokes with each wheel                                                                                                                              |  |
| HR-Achsstummel 12x150 mm  bei HR mit 12x157-mm-Achse im Lieferumfang enthalten |  |
| 2 replacement spokes with each wheel                                                                                                                              |  |

## COMPATIBILITY

|                                                                               |  |
|-------------------------------------------------------------------------------|--|
| Freewheel: Shimano HG9, XD or Micro Spline                                    |  |
| VR-Achse: 15x110 mm Boost (Steckachse)                                        |  |
| Front axle: 15x110 Boost, convertible to 20x110 Boost thru axle with adapters |  |
| Front axle: 15x110 Boost, convertible to 20x110 Boost thru axle with adapters |  |
| Front axle: 15x110 Boost, convertible to 20x110 Boost thru axle with adapters |  |
| HR-Achse: 12x148 mm Boost (Steckachse)                                        |  |
| Freewheel: Shimano HG9, XD or Micro Spline                                    |  |
| Boost Axles : 15X110 ; 12X148                                                 |  |
| Boost Axles : 15X110 ; 12X148                                                 |  |
| Boost Axles : 15X110 ; 12X148                                                 |  |
| DH spacing axles: 12X150 , 12x157 , 12X157-7speed                             |  |
| DH spacing axles: 12X150 , 12x157 , 12X157-7speed                             |  |
| DH spacing axles: 12X150 , 12x157 , 12X157-7speed                             |  |
| Freewheel: Shimano HG9, XD or Micro Spline                                    |  |