


REFERENCES WHEELS



**RIMS**

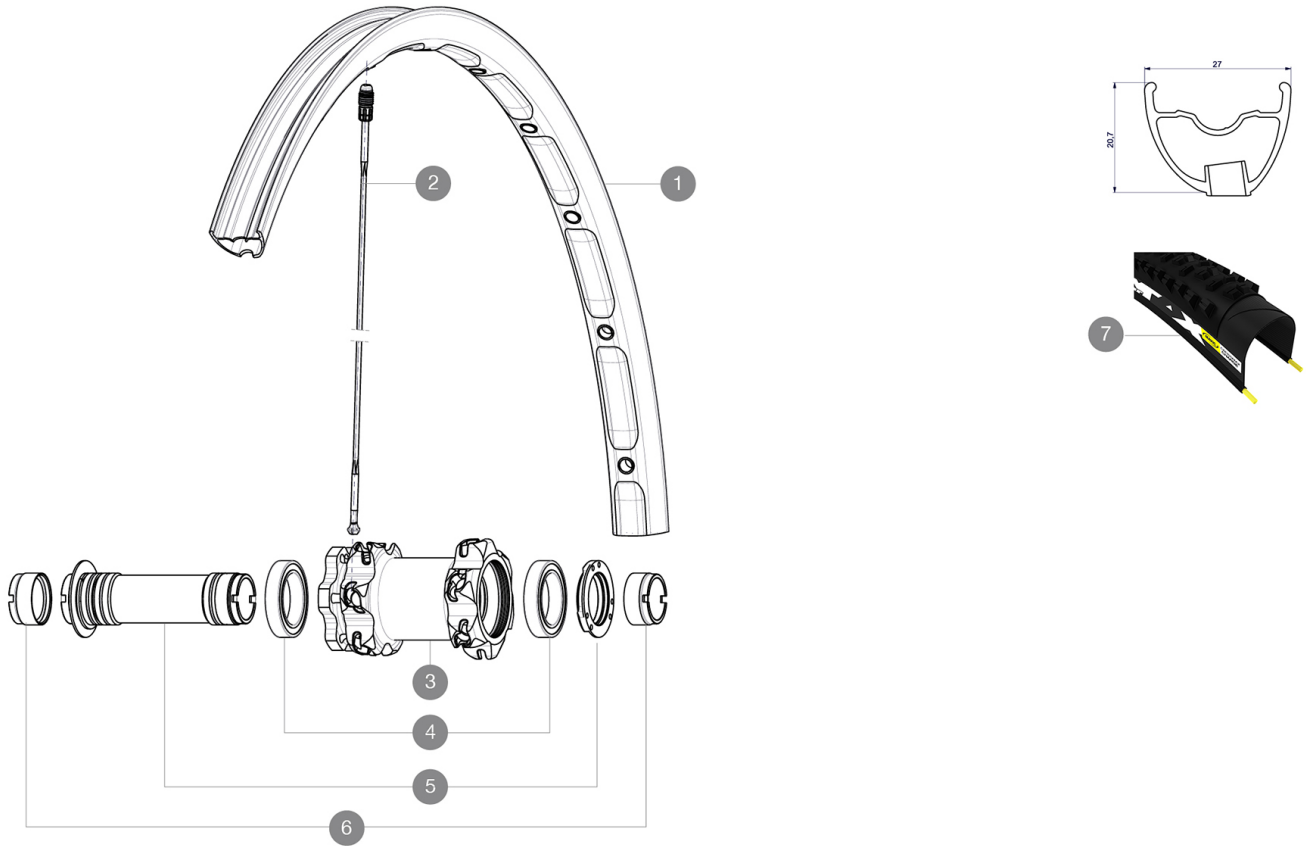

&NBSP;:

1	36692310	"KIT FRONT CROSSMAX ENDURO 27,5"" RIM"
---	----------	--

**SPOKES**

2	36674901	KIT 12 FT XMAX END/FT-NDS DEEMAX PRO 27,5" ALU SPK 275mm
---	----------	--

**HUB SHELLS**

3	N/A	HUB BODY
4	M40179	FRONT BEARING 25x37x7 20mm AXLE
5	30870501	FRONT AXLE 20mm CROSSMAX + DEEMAX ULTI 2012

**TYRES**

7	35636424	Crossmax Charge 650b
---	----------	----------------------

**ADAPTERS**

6	12982901	ADAPTER Ft 20x110mm
---	----------	---------------------

**MAVIC** *Crossmax Enduro 27.5 WTS***DELIVERED WITH**

BX601 rear quick release	
UST valve and accessories	
Front 15 mm adapters	
Front 20 mm adapters	
Rear QR adapters	
Rear 12x142mm adapters	
Specific disc bolts	
Multifonction adjustment wrench	
User guide	

**Specifications****RIMS**

- **Material** : Maxtal
  - **Joint** : SUP
  - **Drilling** : Fore
- Disc brake specific profile
- **Weight reduction** : ISM
  - **Valve hole diameter** : 6.5 mm
  - **Tyre** : UST Tubeless and tubetype
  - **Internal width** : 21 mm front and 19mm rear
  - **ETRTO size 26"** : 559x21C front & 559x19C rear
  - **ETRTO size 650b/27.5"** : 584x21C front & 584x19C rear
  - **Recommended tyre sizes** : 2.0 to 2.5

**SPOKES**

- **Material** : Zicral
- **Shape** : straight pull, bladed
- **Nipples** : Fore integrated aluminum
- **Count** : 24 front and 20 rear
- **Lacing** : front crossed 2, rear Isopulse

**WHEEL HUB**

- **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
- Adjustable sealed cartridge bearings
- **Freewheel** : ITS-4 alloy
- Shimano 11 speeds compatible  
XD Compatible (XX1-X01) with optionnal kit

**WHEEL WEIGHTS**

Weight Front 26": 825  
Weight Front 27.5": 850