


ASTM CATEGORY 3 : offroad with jumps less than 61cm  
Recommended weight limit : 120kg

## REFERENCES WHEELS

F36801 Xride Light26Ft WTS

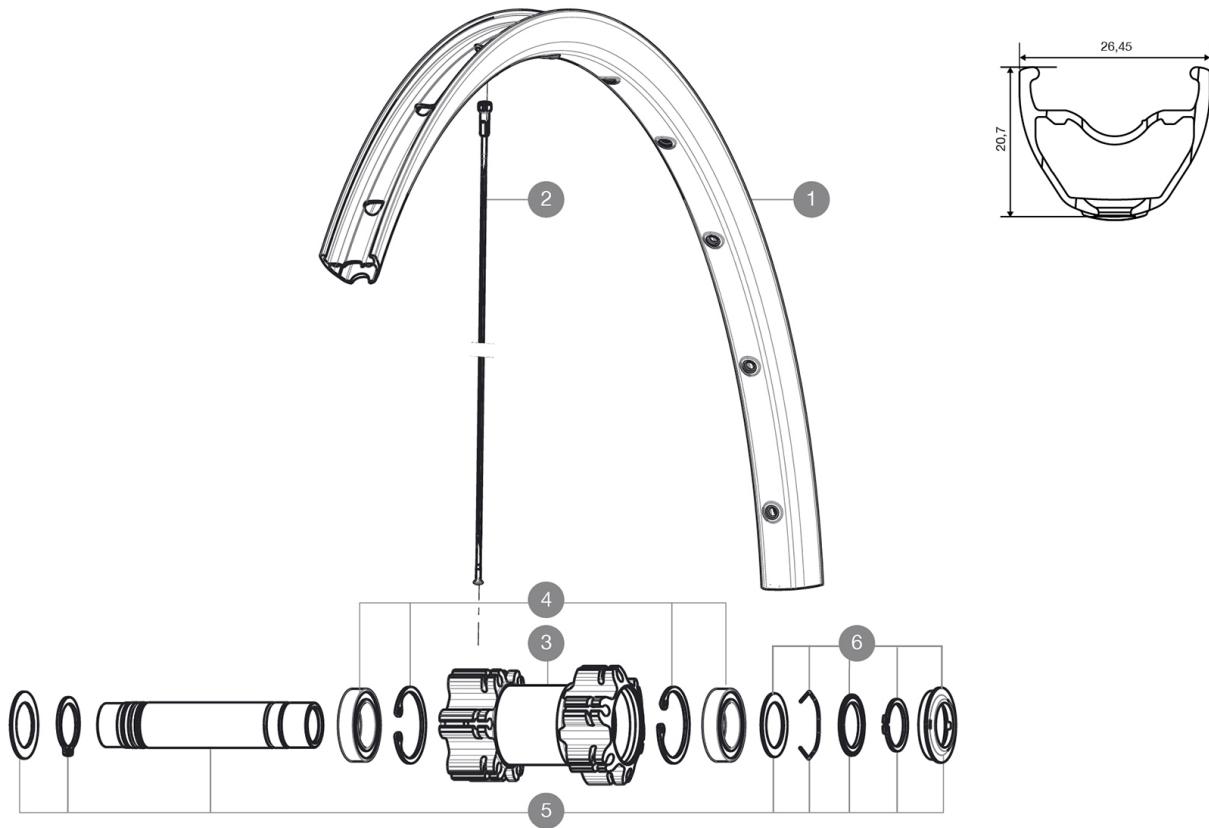

## RIMS



VALVE HOLE (MM): 8,5 WITH POP OFF REDUCER :

|   |          |                                          |
|---|----------|------------------------------------------|
| 1 | V2314415 | "KIT FRONT/REAR RIM CROSSRIDE LIGHT 26"" |
|---|----------|------------------------------------------|

## SPOKES

|   |          |                                              |
|---|----------|----------------------------------------------|
| 2 | V2381501 | KIT 12 FRONT CROSSRIDE LIGHT 26" SPOKE 263mm |
|---|----------|----------------------------------------------|

## HUB SHELLS

|   |          |                                                            |
|---|----------|------------------------------------------------------------|
| 3 | N/A      | HUB BODY                                                   |
| 4 | 99688501 | BEARING KIT 9/12/15 D6T HUB 20x32x7 6804                   |
| 5 | V2370101 | KIT FRONT AXLE 15MM CROSSONE/-RIDE/-ROC - while stock last |
| 5 | V2371101 | KIT FRONT QRM AXLE 100mm/BOOST 110mm                       |
| 6 | V2370301 | KIT FRONT AUTO ADJUSTING PLAY 15mm AXLE                    |



# Crossride Light WTS 26

2016  
FRONT

DELIVERED WITH

|                                                                                           |  |
|-------------------------------------------------------------------------------------------|--|
| Rim tape                                                                                  |  |
| Rear 12x142mm adapters                                                                    |  |
| User guide                                                                                |  |
| Rear 12x142mm adapters for ITS4 and TS2<br>(308 593 01 for ITS4, 329 650 01 for TS2)<br>1 |  |
| Rim tape                                                                                  |  |
| User guide                                                                                |  |

COMPATIBILITY

|                                                                                     |  |
|-------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to XD with optional driver body                |  |
| Front axle: convertible from 15mm thru axle to Quick Release with optional adapters |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters      |  |

Specifications

RIMS

- **Joint** : sleeved
  - **Drilling** : traditional
- Disc brake specific profile
- **Valve hole diameter** : 8,5 mm with pop off reducer
  - **Tyre** : tubetype
  - **Internal width** : 21 mm
  - **ETRTO size 26"** : 559x21C
  - **ETRTO size 27.5"** : 584x21C
  - **ETRTO size 29"** : 622x21C
  - **Joint** : sleeved
  - **Drilling** : traditional
- Disc brake specific profile
- **Valve hole diameter** : 8,5 mm with pop off reducer
  - **Tyre** : tubetype
  - **Internal width** : 21 mm
  - **ETRTO size 26"** : 559x21C
  - **ETRTO size 27.5"** : 584x21C
  - **ETRTO size 29"** : 622x21C

SPOKES

- **Material** : steel
- **Shape** : straight pull, bladed, double butted
- **Nipples** : brass, ABS
- **Count** : 24 front and rear
- **Material** : steel
- **Lacing** : front and rear crossed 2
- **Shape** : straight pull, bladed, double butted
- **Nipples** : steel, ABS
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2

WHEEL HUB

- **Freewheel** : TS-2 alloy
- **Front and rear bodies** : aluminum
- **Freewheel** : TS-2 alloy

VERSIONS

- **Color** : Black only
- **Disc standard** : 6 Bolts only
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)

WHEEL WEIGHTS

- Wheel weight
- Weight Front 26": 850
- Weight Front 27.5": 880
- Weight Front 29": 930