MAVIC Crossride Light WTS 29

ASTM CATEGORY 3 : offroad with jumps less than 61cm
Recommended weight limit : 120kg

REFERENCES WHEELS

F37001	Xride Light29Ft WTS	F71551	XrdLight29Ft Boost WTS

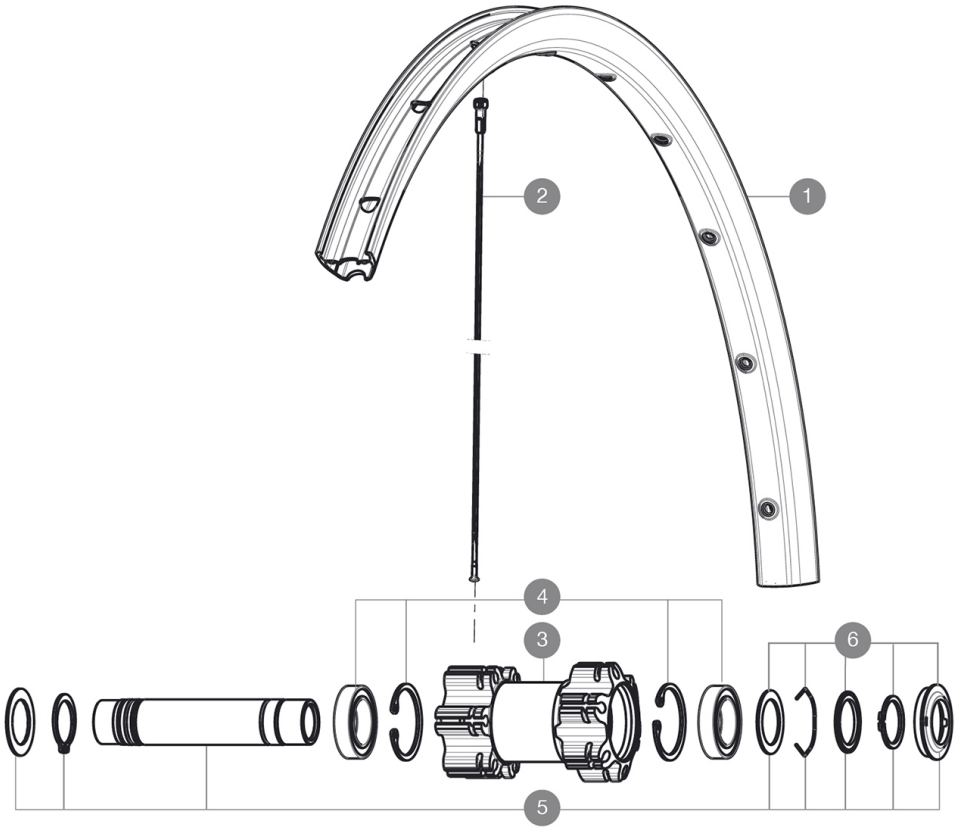



RIMS

Ã VALVE HOLE (MM): 8,5 WITH POP OFF REDUCER :

1	V2314615	"KIT FRONT/REAR RIM CROSSRIDE LIGHT 29"""

SPOKES

2	V2382601	KIT 12 FT/NDS XRIDE LIGHT 29'' SPOKE 293mm

HUB SHELLS

3	N/A	HUB BODY
4	99688501	BEARING KIT 9/12/15 D6T HUB 20x32x7 6804
5	V2370101	KIT FRONT AXLE 15MM CROSSONE/-RIDE/-ROC - while stock last
5	V2371101	KIT FRONT QRM AXLE 100mm/BOOST 110mm
6	V2370301	KIT FRONT AUTO ADJUSTING PLAY 15mm AXLE

Download date: 2024-07-16 / Update date: 2022-03-01

MAVIC Crossride Light WTS 29

DELIVERED WITH

Rim tape	
Rear 12x142mm adapters	
Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1	
User guide	
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1	
Rim tape	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram, convertible to XD with optional driver body	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru axle to Quick Release with optional adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	

Specifications

RIMS

- **Joint :** sleeved
- **Drilling :** traditional

Disc brake specific profile

- **Valve hole diameter :** 8,5 mm with pop off reducer
- **Tyre :** tubetype
- **Internal width :** 21 mm
- **ETRTO size 26" :** 559x21C
- **ETRTO size 27.5" :** 584x21C
- **ETRTO size 29" :** 622x21C
- **Joint :** sleeved
- **Drilling :** traditional

Disc brake specific profile

- **Valve hole diameter :** 8,5 mm with pop off reducer
- **Tyre :** tubetype
- **Internal width :** 21 mm
- **ETRTO size 26" :** 559x21C
- **ETRTO size 27.5" :** 584x21C
- **ETRTO size 29" :** 622x21C

SPOKES

- **Material :** steel
- **Shape :** straight pull, bladed, double butted
- **Nipples :** brass, ABS
- **Count :** 24 front and rear
- **Material :** steel
- **Lacing :** front and rear crossed 2
- **Shape :** straight pull, bladed, double butted
- **Nipples :** steel, ABS
- **Count :** 24 front and rear
- **Lacing :** front and rear crossed 2

WHEEL HUB

- **Freewheel :** TS-2 alloy
- **Front and rear bodies :** aluminum
- **Freewheel :** TS-2 alloy

VERSIONS

- **Color :** Black only
- **Disc standard :** 6 Bolts only
- **Hub width :** Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)

WHEEL WEIGHTS

Wheel weight
Weight Front 26": 850
Weight Front 27.5": 880
Weight Front 29": 930

Download date: 2024-07-16 / Update date: 2022-03-01