


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  
 Recommended weight limit : 120kg  
 Recommended tire sizes: 25 to 32 mm  
 Max. Pressure: 23mm 8.7 bars - 125 psi, 25/28mm 7.7 bars - 110 psi

## REFERENCES WHEELS

|        |                          |        |                         |
|--------|--------------------------|--------|-------------------------|
| R94301 | Aksium 17 D6B Rr QRx135  | R94401 | Aksium 17 DCL Rr QRx135 |
| R99201 | Aks 17 DCL Rr QRx135 WTS |        |                         |

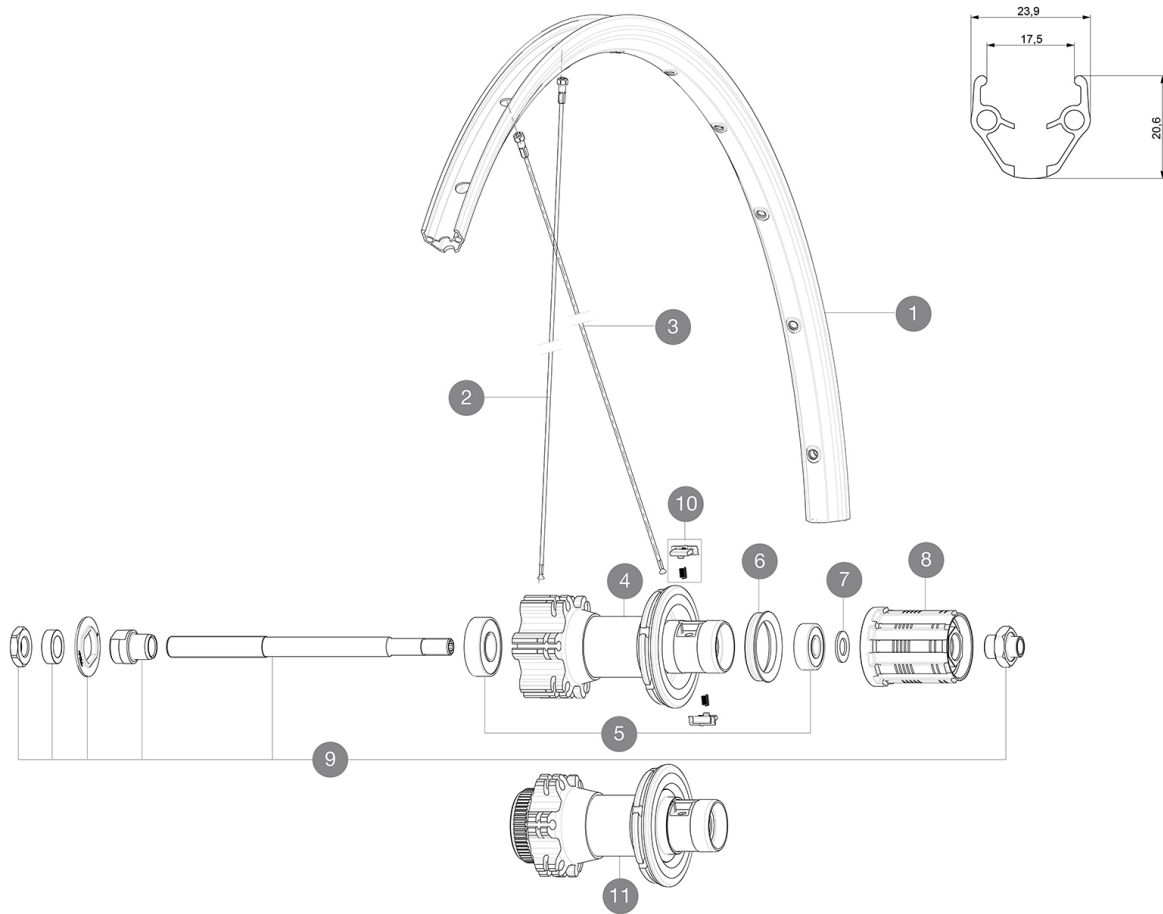

## RIMS



&NBSP;:

|   |          |  |
|---|----------|--|
| 1 | V2290815 | KIT FRT/REAR RIM AKSIUM ONE DISC/AKSIUM DISC |
|---|----------|--|



## SPOKES

|   |          |   |
|---|----------|---|
| 2 | 36690301 | "KIT 12 FT/NDS XONE/XMAX - XA 29"/AKSIUM DISC 9 + 12 FT/AKS |
| 3 | 36690401 | KIT 12 DS XONE/XRIDE FT SX/AKSIUM DISC 9 SPK 294mm          |

## HUB SHELLS

|    |          |   |
|----|----------|---|
| 4  | N/A      | HUB BODY                                      |
| 5  | M40660   | REAR HUB 608+6001 BEARINGS                    |
| 6  | 99500001 | FTSL/FTSX FREEHUB BODY SEAL                   |
| 7  | M40067   | INTERNAL FREEWHEEL SPACER FTSL/FTSX           |
| 8  | 30871101 | FTS-L ROAD FREEWHEEL BODY HG11 8/9 compatible |
| 9  | 32348001 | MTB DISC REAR AXLE QRM MTB DISC               |
| 10 | 32430301 | FTSX PAWLS KIT (MTB WHEELS)                   |

## DELIVERED WITH

|   |   |
|---|---|
| BR101 quick releases<br>(M40350 firt, M40351 rear road, M40352 rear MTB)<br>1 |  |
| BR101 quick releases<br>(M40350 firt, M40351 rear road, M40352 rear MTB)<br>1 |  |
| Rim tape  |   |
| Rim tape  |   |
| User guide  |   |
| User guide  |   |

## COMPATIBILITY

|  |  |
|--|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body |  |
| Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body |  |
| Front axle: Quick Release only   |  |
| Front axle: Quick Release only   |  |
| Rear axle: Quick Release only  |  |
| Rear axle: Quick Release only  |  |

## Specifications

### RIMS

- **Material** : S6000 Aluminum
- **Material** : S6000 Aluminum
- **Height** : 21 mm
- **Height** : 21 mm
- **Joint** : pinned
- **Joint** : pinned
- **Drilling** : traditional with H2 reinforcement
- **Drilling** : traditional with H2 reinforcement
- Disc brake specific profile
- Disc brake specific profile
- **Valve hole diameter** : 6.5 mm
- **Valve hole diameter** : 6.5 mm
- **Tire** : clincher
- **Tire** : clincher
- **Internal width** : 17 mm
- **Internal width** : 17 mm
- **ETRTO size** : 622x17C
- **ETRTO size** : 622x17C

### SPOKES

- **Material** : steel
- **Material** : steel
- **Shape** : straight pull, round
- **Shape** : straight pull, round
- **Nipples** : steel, ABS
- **Nipples** : steel, ABS
- **Count** : 24 front and rear
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2
- **Lacing** : front and rear crossed 2

### WHEEL HUB

- **Front and rear bodies** : aluminum
- **Front and rear bodies** : aluminum
- **Axle material** : steel
- **Axle material** : steel
- Sealed cartridge bearings
- Sealed cartridge bearings
- **Freewheel** : FTS-L steel
- **Freewheel** : FTS-L steel

### VERSIONS

- **Color** : Black only
- **Color** : Black only
- **Disc standard** : 6 Bolts or Center Lock(R)
- **Disc standard** : 6 Bolts or Center Lock(R)

### WHEEL WEIGHTS

Wheel weight 1105