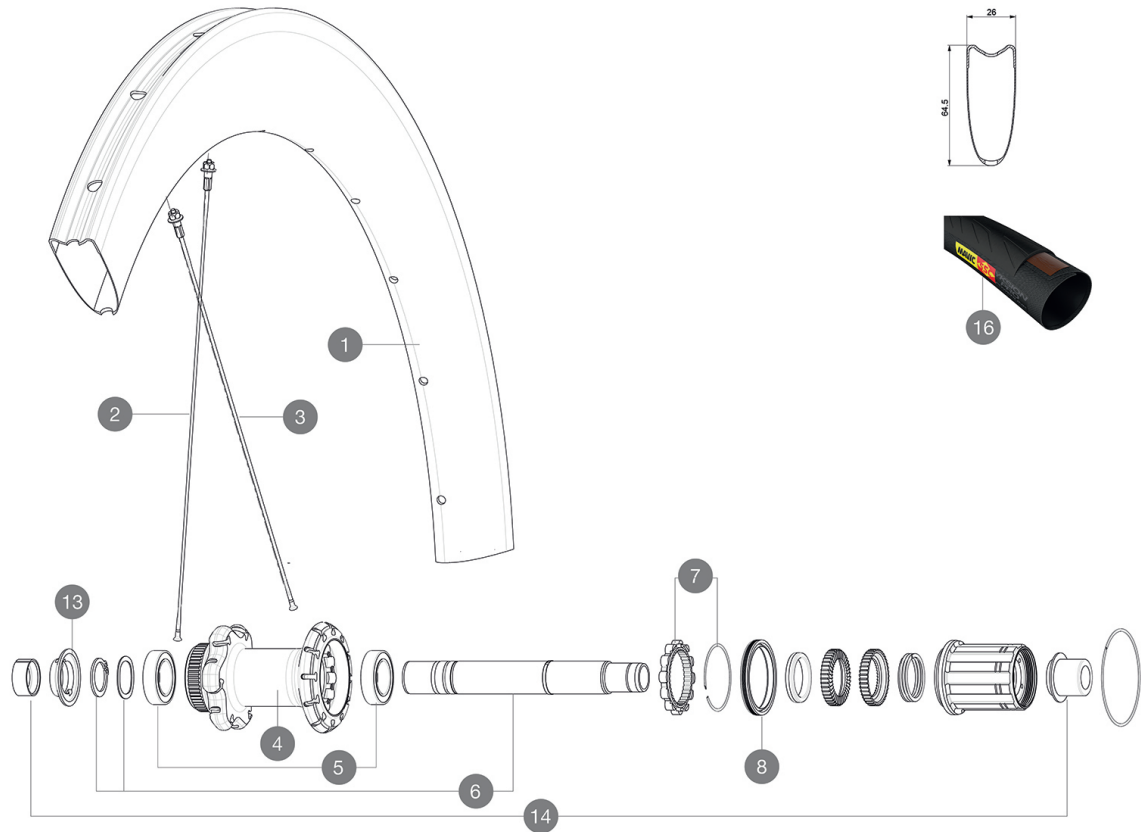


**MAVIC** *Comete Pro Carbon SL T Disc*

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  
 Recommended weight limit : 120kg  
 Recommended tire sizes: 25 to 32 mm  
 Max. Pressure: 23mm 8.7 bars - 125 psi, 25/28mm 7.7 bars - 110 psi  
 Max. Pressure: 25mm 7.7 bars - 110 PSI

**REFERENCES WHEELS**

R93201 ComProCarSiTDCLRr12x142

**RIMS**

&amp;NBSP;:

|   |          |  |
|---|----------|--|
| 1 | V2731513 | KIT REAR RIM COMETE PRO CARBON SL T DISC |
|---|----------|--|

**SPOKES**

|   |          |  |
|---|----------|--|
| 2 | V2278601 | KIT 12 FT/NDS BUTTED AERO SPOKE 253mm - while stock last     |
| 2 | V3662301 | KIT 12 FRt/NDS COMETE PRO CARB SL T/UST D & DS COSMIC PRO CA |
| 3 | V2278701 | KIT 12 DS BUTTED AERO SPOKE 236mm -while stock last          |
| 3 | V3662401 | KIT 12 DS BUTTED AERO STAINLESS SPOKE 236 + alu nipp.+ wash. |
| 3 | V2278501 | KIT 1 FT 247/FT 253/DS 236 COMETE PRO CARB SL T D SPK        |

**HUB SHELLS**

|    |          |  |
|----|----------|--|
| 4  | N/A      | HUB BODY                                     |
| 5  | V2560401 | KIT 2 BEARINGS 17x28x7 + WAVED WASHER + CLIP |
| 6  | V2252901 | KIT ID360 CENTER LOCK 135/142mm AXLE W/CLIP  |
| 7  | V2252701 | KIT ID360 INSERT SHAPED EAR LOBE > 2017      |
| 8  | V2251601 | KIT ID360 SEAL + GREASE                      |
| 9  | V2251701 | KIT ID360 2 RATCHETS + SPRING + GREASE       |
| 10 | V2500501 | KIT ID360 3 PADS NOISE REDUCING              |
| 11 | V2251801 | KIT 3 ID360 ROAD SPRINGS                     |
| 12 | V3430101 | HG11 Freewheel Body ID360                    |
| 15 | V2252201 | KIT 2 REAR HUB RETENTION RINGS 48mm          |

**TYRES**









|    |          |                        |
|----|----------|------------------------|
| 16 | 37804625 | Yksion ProPowerTub SSC |
|----|----------|------------------------|

**ADAPTERS**

|    |          |                                |
|----|----------|--------------------------------|
| 14 | V2510701 | ID360V2RrAxleAdapt12x142/148   |
|    | V2510901 | ID360 EVO RrAxleAdpt12x135/150 |
|    | V2510801 | ID360 V2 RrAxleAdapt9x135      |

# MAVIC Comete Pro Carbon SL T Disc

## DELIVERED WITH

|   |  |
|---|--|
| Front 12 mm adapters<br>(B4104201)<br>1   |   |
| Rear 12x142mm adapters for Instant Drive 360<br>(B49 896 01 for ID360 6T, B49 899 01 for ID360 CL)<br>1 |   |
| Valve extender<br>(118 952 01)<br>1   |   |
| Valve extender<br>(118 952 01)<br>1   |   |
| Specific disc bolts<br>(308 719 01)<br>Pack of 6  |   |
| Specific disc bolts<br>(308 719 01)<br>Pack of 6  |   |
| Multifunction adjustment wrench<br>(325 423 01)<br>1  |   |
| Multifunction adjustment wrench<br>(325 423 01)<br>1  |  |
| User guide  |  |
| User guide  |  |

## COMPATIBILITY

|   |  |
|---|--|
| Freewheel: Shimano/Sram or Campagnolo, convertible to XD-R with optional driver body                  |  |
| Front axle: convertible from 12mm thru axle to quick release or 15mm thru axle with optional adapters |  |
| Front axle: convertible from 12mm thru axle to quick release or 15mm thru axle with optional adapters |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters                        |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters                        |  |

## Specifications

### RIMS

- Material : 3K carbon fibers
- Material : 3K carbon fibers
- Height : 64mm
- Height : 64mm
- Drilling : traditional
- Drilling : traditional
- Disc brake specific profile
- Disc brake specific profile
- Valve hole diameter : 6.5 mm
- Valve hole diameter : 6.5 mm
- Tire : tubular
- Tire : tubular
- ETRTO size : 28" tubular
- ETRTO size : 28" tubular

### SPOKES

- Material : steel
- Material : steel
- Shape : straight pull, bladed, double butted
- Shape : straight pull, aero, double butted
- Nipples : aluminum, ABS
- Nipples : aluminum, ABS
- Count : 24 front and rear
- Count : 24 front and rear
- Lacing : front crossed 2, rear Isopulse
- Lacing : front crossed 2, rear Isopulse

### WHEEL HUB

- Front and rear bodies : aluminum
- Front and rear bodies : aluminum
- Axle material : aluminum
- Axle material : aluminum
- Sealed cartridge bearings
- Front bearings : adjustable sealed cartridge bearings (QRM+), Rear bearings auto adjust sealed cartridge bearings (QRM Auto)
- Freewheel : Instant Drive 360
- Freewheel : Instant Drive 360
- Front : Quick release, 12 thru and 15 thru compatible
- Rear : 12x142 (convertible to quick release with optional adapters)

### VERSIONS

- Color : Black only
- Color : Black only
- Disc standard : Center Lock(R) only
- Disc standard : Center Lock(R) only

### WHEEL WEIGHTS

Wheel weight 865