MAVIC Crossmax Pro 29

ASTM CATEGORY 3 : offroad with jumps less than 61cm
Recommended weight limit : 120kg
Recommended tire sizes: 28 mm to 62 mm (1.1" to 2.5")

REFERENCES WHEELS

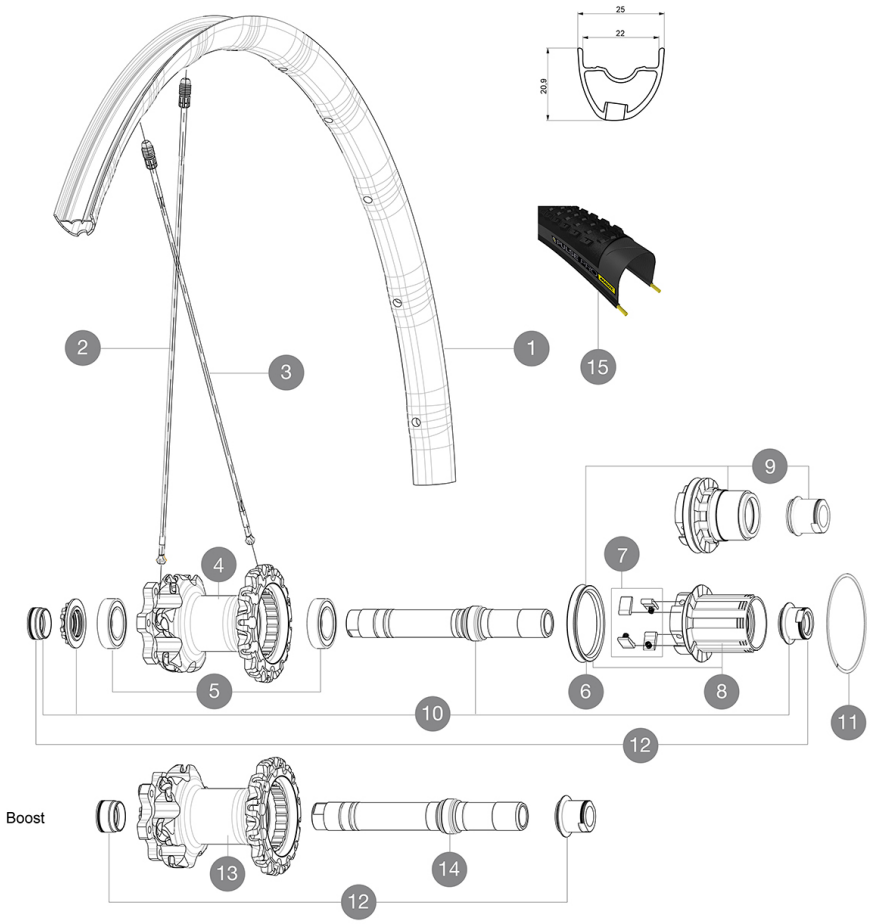

RIMS

Ã VALVE HOLE (MM): 6,5 :

1	V2316313	KIT REAR RIM CROSSMAX PRO 29'' 22mm TSS
1	V2317713	KIT RR RIM CROSSMAX PRO 29'' 22mm TSS OFFSET

SPOKES

2	V2386401	KIT 1 275mm 27,5'' + 1 293mm 29'' CROSSMAX PRO STAMPED BUTTE
2	V2384801	KIT 12 FT/NDS CROSSMAX PRO 29'' AL SPK 293mm
3	35113801	"KIT 10 DS M7/7 XMAX SLR/PRO 29"" SPK 269,5mm"

HUB SHELLS

4	N/A	HUB BODY
5	M40076	HUB BEARINGS 17x30x7 6903 x 2
6	99610701	ITS-4 FREEWHEEL SEAL
7	99610601	PAWLS KIT FOR ITS-4 (OR TS-2)
8	35126001	ITS-4 FREEWHEEL BODY + SEAL 2013 (NO PAWLS)
9	35684101	FREEHUB BODY XD TS2/ITS-4
10	30870401	REAR QRM + AXLE KIT ITS4 135mm from 2012
11	30871801	ELASTIC RING 56mm diam. ITS-4 20 SPOKES
13	N/A	HUB BODY
14	V2370801	KIT REAR QRM+ AXLE BOOST ITS-4 148mm

TYRES

15	39243221	Pulse Pro 29
15	39243232	Pulse Pro 29

ADAPTERS

12	30872201	FRAME SUPPORT ITS-4 135mm REAR AXLE > 2012
	30873101	2 REAR REDUCERS 12/9,5mm 2012 ITS4 HUB

Download date: 2024-07-16 / Update date: 2022-05-31

MAVIC Crossmax Pro 29

DELIVERED WITH

1 bottle of Mavic Sealant (355 466 01) 1	
BX601 quick releases (V24 503 01 frt, V24 504 01 rear) 1	
Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1	
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
Multifonction adjustment wrench (325 423 01) 1	
Multifonction adjustment wrench (325 423 01) 1	
User guide	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram, convertible to XD with optional driver body	
Freewheel: Shimano/Sram or XD	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	

Specifications

RIMS

- **Material :** Maxtal
- **Material :** Maxtal
- **Joint :** SUP
- **Joint :** SUP
- **Drilling :** Fore
- **Drilling :** Fore
- **Weight reduction :** ISM 4D
- **Weight reduction :** ISM 4D
- **Valve hole diameter :** 6.5 mm
- **Valve hole diameter :** 6.5 mm
- **Tire :** UST Tubeless and tubetype
- **Tire :** UST Tubeless and tubetype
- **Internal width :** 22 mm
- **Internal width :** 22 mm
- **ETRTO size 27.5" :** 584x22ss
- **ETRTO size 27.5" :** 584x22ss
- **ETRTO size 29" :** 622x22ss
- **ETRTO size 29" :** 622x22ss

Hookless profile
Hookless profile

SPOKES

- **Material :** Zicral
- **Material :** Zicral
- **Shape :** straight pull, bladed, double butted
- **Shape :** straight pull, bladed, double butted
- **Count :** 24 front and rear
- **Count :** 24 front and rear
- **Lacing :** front crossed 2, rear lsopulse
- **Lacing :** front crossed 2, rear lsopulse

WHEEL HUB

- **Rear body :** aluminum
- **Rear body :** aluminum
- **Front body :** carbon with aluminum flanges
- **Front body :** carbon with aluminum flanges
- **Axle material :** aluminum
- **Axle material :** aluminum

Sealed cartridge bearings
Sealed cartridge bearings

- **Freewheel :** ITS-4 alloy
- **Freewheel :** ITS-4 alloy

VERSIONS

- **Color :** Black only
- **Color :** Black only
- **Disc standard :** 6 Bolts only
- **Disc standard :** 6 Bolts only
- **Hub width :** Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- **Hub width :** Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)

Lefty Supermax
Lefty Supermax

WHEEL WEIGHTS

Wheel weight
Weight Rear 27.5": 835
Weight Rear 29": 865

Download date: 2024-07-16 / Update date: 2022-05-31