

参照ホイール


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm

15mm
Recommended tire sizes: 28 to 64 mm (1.1" to 2.5")

Recommended tire sizes: 28 to 64 mm (1.1" to 2.5")

For a longer longevity of the wheel, Mavic recommends that the total weight supported by

the wheels doesn't exceed 180kg, E-bike included

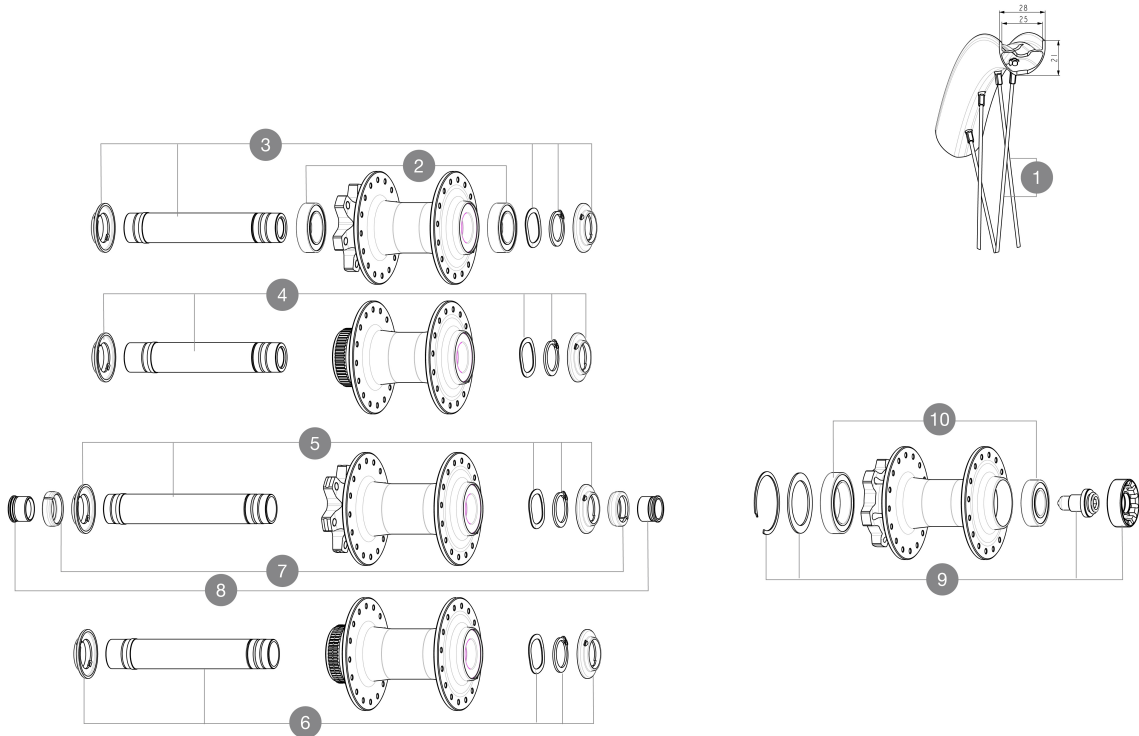

SPOKES

1 V00062431 Kit 16 ft/rr Jbent bk rd spk 293 29"+np

HUB SHELLS

2	V2500901	KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
3	V2375501	Kit QRM auto front axle 100x12/15mm D6T
4	V2374001	KIT 12x100mm FRONT AXLE DCL QRM AUTO ALLROAD > 2019
5	V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019
6	V2375601	Kit 110mm axle QRM auto MTB from 2019 DCL
9	36709301	ASSEMBLY KIT CROSSROC SUPERMAX
10	M40771	BEARING KIT FOR LEFTY HUB

ADAPTERS

7	V2372501	15mm MTB Axle Cap QRM Auto From 2019
8	V2680201	12mmFtRoadAxleAdaptersQRM
	V2680301	"Kit Ft Road Adapter 12 >> 9mm"
	99694101	2 REDUCERS 15/9mm



COMPATIBILITY

[illegible]