




RIMS

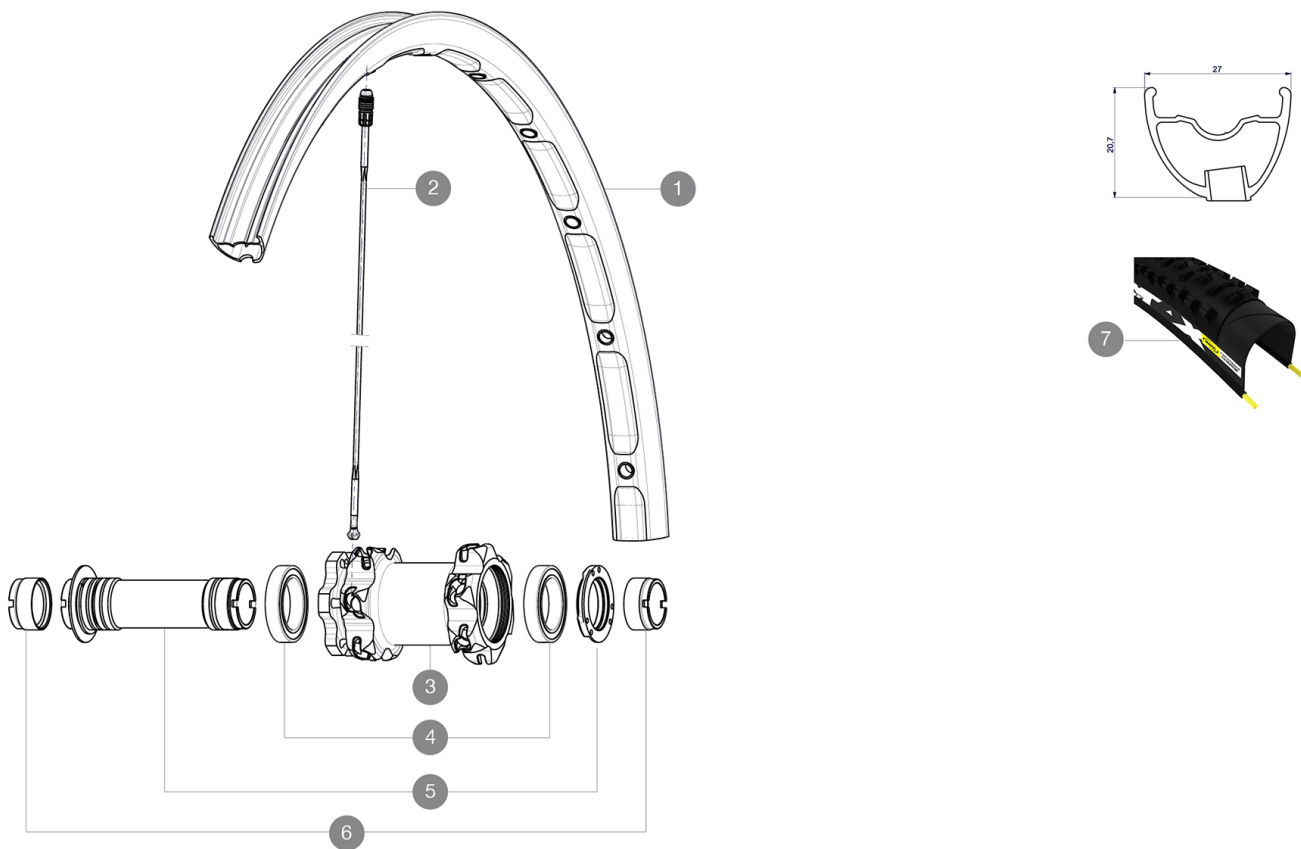

&NBSP;:

1	36692310	"FRONT CROSSMAX ENDURO 650b/27,5" RIM"
---	----------	--

SPOKES

2	36674901	"12 SPOKES FRONT CROSSMAX SLR/ENDURO 650b/27,5" 274mm"
---	----------	--

HUB SHELLS

3	N/A	HUB BODY
4	M40179	FRONT BEARING 25x37x7 20mm AXLE
5	30870501	FRONT AXLE 20mm CROSSMAX ST/SX + DEEMAX ULTI 2012

TYRES

7	35636424	Crossmax Charge 650b
---	----------	----------------------

ADAPTERS

6	12982901	20mm adapter for Crossmax ST/SX (front wheel)
---	----------	---



Crossmax Enduro 27.5 WTS

付属品

BX601 rear quick release	
UST valve and accessories	
Front 15 mm adapters	
Front 20 mm adapters	
Rear QR adapters	
Rear 12x142mm adapters	
Specific disc bolts	
Multifonction adjustment wrench	
User guide	

Specifications

リム

- Material : Maxtal
- Joint : SUP
- Drilling : Fore
- Disc brake specific profile
- Weight reduction : ISM
- Valve hole diameter : 6.5 mm
- Tyre : UST Tubeless and tubetype
- Internal width : 21 mm front and 19mm rear
- ETRTO size 26" : 559x21C front & 559x19C rear
- ETRTO size 650b/27.5" : 584x21C front & 584x19C rear
- Recommended tyre sizes : 2.0 to 2.5

スポーク

- Material : Zicral
- Shape : straight pull, bladed
- Nipples : Fore integrated aluminum
- Count : 24 front and 20 rear
- Lacing : front crossed 2, rear Isopulse

ホイールハブ

- Front and rear bodies : aluminum
- Axle material : aluminum
- Adjustable sealed cartridge bearings
- Freewheel : ITS-4 alloy
- Shimano 11 speeds compatible
- XD Compatible (XX1-X01) with optionnal kit

ホイールの重み

Weight Front 26": 825
Weight Front 27.5": 850