ELLIPSE

ASTMè¦□æ ¼ ã□«ã□□ã□´ã□ªã□¼ 1 : ã□ã□¼ã□□ã□®ã□¿
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included
æ□□å°□ã□¿ã□¤ã□¤ã□µã□¤ã□ºï¼□å¹ 23mm-
æ□□å¤§ç©ºæ°□å□§9Bar/130PSI
Recommended tyre sizes: 21 to 28 mm
Â¿2Â¿Â¿Â¿Â¿Â¿Â¿Â¿
Maximum tyre pressure: 8.4bar/121PSI with a 23mm tyre - 7.85bar/114PSI with a 32mm tyre
Â¿Â¿Â¿Â¿Â¿Â¿7.5mm
Â¿Â¿Â¿Â¿Â¿23mm 8.7 bars - 125 psi
æ□□å¤§ã□¿ã□¤ã□¤ã□µã□¤ã□ºï¼□å¹ 32mm-
æ□□å¤§ç©ºæ°□å□§8Bar/115PSI
Minimum cog width : 7.5mm

参照ホイール

F32501	ELLIPSE RB 700

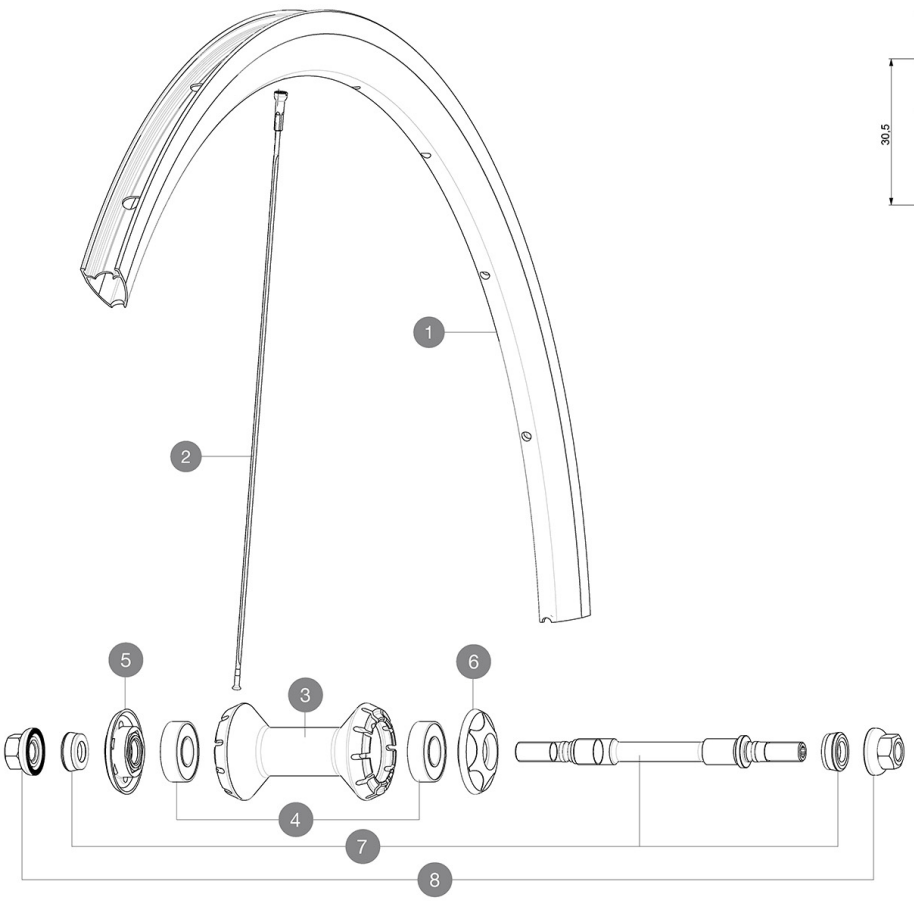



RIMS

 :

1	12033415	FRONT/REAR ELLIPSE 11 RIM
	V2690201	KIT CARBON RIM TAPE 18x622mm (SPECIAL RIM TAPE)

SPOKES

2	12033701	10 BLACK FRONT SPOKES ELLIPSE 11 279mm

HUB SHELLS

3	N/A	HUB BODY
4	M40318	HUB BEARING KIT 6001
5	M40242	ADJUSTING NUT ROAD WHEEL
6	M40243	HUB CAP ROAD WHEEL
7	32386101	ELLIPSE FRT AXLE+FORK SUPPORTS
8	32388601	2 AXLE BOLTS ELLIPSE F/R M9

Download date: 2024-07-16 / Update date: 2024-07-15

MAVIC ELLIPSE

付属品	COMPATIBILITY
Fixing nuts	Â¿Â¿Â¿