


## 参照ホイール

F36501 XrideUST Quest26FtWTS

ASTM CATEGORY 3 : offroad with jumps less than 61cm  
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included  
ETRTO recommended tyre sizes: 35mm to 69mm (1.4" to 2.7")

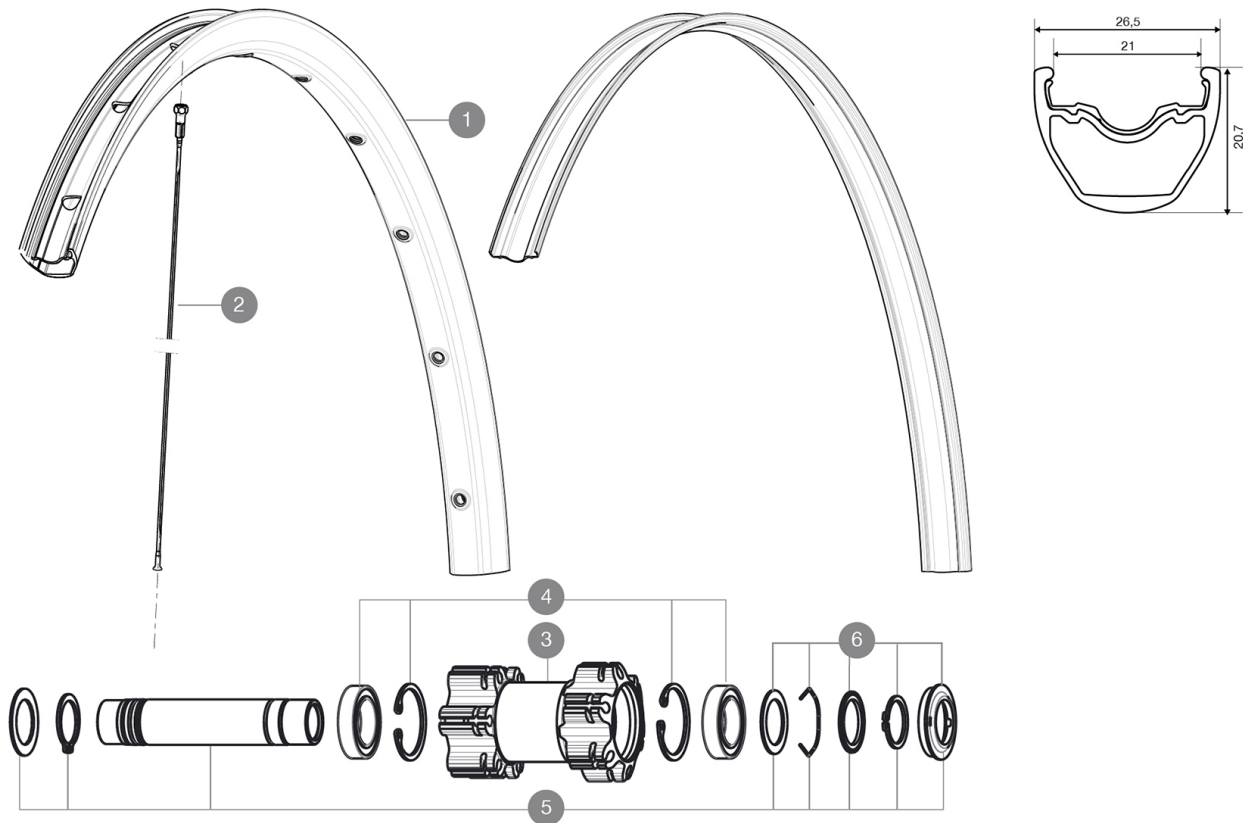

## RIMS



バルブ穴径 ( MM ) : 6,5 :

|   |          |                           |
|---|----------|---------------------------|
| 1 | V2314115 | RIM CROSSRIDE TUBELESS 26 |
|   | V2170101 | UST rim strip 26 - 21C    |

## SPOKES

|   |          |                                                           |
|---|----------|-----------------------------------------------------------|
| 2 | V2381001 | 12 REAR NON-DRIVE SIDE SPOKES 265mm CROSSRIDE TUBELESS 26 |
|---|----------|-----------------------------------------------------------|

## HUB SHELLS

|   |          |                                                            |
|---|----------|------------------------------------------------------------|
| 3 | N/A      | HUB BODY                                                   |
| 4 | 99688501 | BEARING KIT 9/15 D6T HUB                                   |
| 5 | V2371101 | KIT FRONT QRM AXLE 100mm/BOOST 110mm                       |
| 5 | V2370101 | KIT FRONT AXLE 15MM CROSSONE/-RIDE/-ROC - while stock last |
| 6 | V2370301 | FRONT AUTO ADJUST.PLAY KIT 15MM AXLE                       |

## 付属品

|                                                                                           |                                                                                    |
|-------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| 1 bottle of Mavic Sealant                                                                 |                                                                                    |
| 1 bottle of Mavic Sealant                                                                 |                                                                                    |
| Tubeless rim tape                                                                         |                                                                                    |
| UST valve and accessories                                                                 |                                                                                    |
| Rear 12x142mm adapters                                                                    |                                                                                    |
| User guide                                                                                |                                                                                    |
| Rear 12x142mm adapters for ITS4 and TS2<br>(308 593 01 for ITS4, 329 650 01 for TS2)<br>1 |  |
| UST valve and accessories                                                                 |                                                                                    |
| Tubeless rim tape                                                                         |                                                                                    |
| User guide                                                                                |                                                                                    |

## COMPATIBILITY

|                                                                                     |  |
|-------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to XD with optional driver body                |  |
| Front axle: convertible from 15mm thru axle to Quick Release with optional adapters |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters      |  |

## Specifications

### リム

- Material : S6000 Aluminum
- Joint : sleeved
- Drilling : traditional with H2 reinforcement
- Valve hole diameter : 8,5 mm with pop off reducer
- Tyre : UST Tubeless and tubetype
- Material : S6000 Aluminum
- Internal width : 21 mm
- ETRTO size 26" : 559x21C
- ETRTO size 27.5" : 584x21C
- ETRTO size 29" : 622x21C
- ETRTO recommended tyre sizes : 35mm to 69mm (1.4" to 2.7")
- Joint : sleeved
- Drilling : traditional with H2 reinforcement
- Valve hole diameter : 8,5 mm with pop off reducer
- Tyre : UST Tubeless and tubetype
- Internal width : 21 mm
- ETRTO size 26" : 559x21C
- ETRTO size 27.5" : 584x21C
- ETRTO size 29" : 622x21C

### スポーク

- Material : steel
- Shape : straight pull, bladed, double butted
- Nipples : brass, ABS
- Count : 24 front and rear
- Material : steel
- Lacing : front and rear crossed 2
- Shape : straight pull, bladed, double butted
- Nipples : steel, ABS
- Count : 24 front and rear
- Lacing : front and rear crossed 2

### ホイールハブ

- Body : aluminum
- Axle material : aluminum
- Sealed cartridge bearings
- Freewheel : TS-2 alloy
- Shimano 11 speeds compatible
- Front and rear bodies : aluminum
- Sram XD Compatible (XX1-X01) with optionnal kit
- Axle material : aluminum
- Sealed cartridge bearings
- Freewheel : TS-2 alloy

### VERSIONS

- Color : Black only
- Disc standard : 6 Bolts only
- Hub width : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)

### ホイールの重み

ホイール重量 ( クイックリリースおよびクリンチャー/チューブラーを除く ) ( g ) :  
Weight Front 26": 845  
Weight Front 27.5": 875  
Weight Front 29": 920