



CROSSRIDE FTS-X 27.5

ASTM CATEGORY 3 : offroad with jumps less than 61cm

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included

Recommended tyre sizes: 36 mm to 64 mm (1.4" to 2.5")

ID360 ã□·ã□□ã□□ ã□¹ã□□ã□¼ã□«

ã□□ã□ªã□¼ã□□ã□ªã□¼ã□«ã□□ã□□ã□£¼□[V3790101]¼□

Maximum tyre pressure: 6.1bar/88PSI with a 25mm tyre - 3.5bar/51PSI with a 64mm tyre


Recommended tire sizes: 28 to 64 mm (1.1" to 2.5")

ETRTO recommended tyre sizes: 35mm to 69mm (1.4" to 2.7")

ID360 N3W ă□□ă□□ă□¼ă□□ă□□ă□¼ă□□ă□□ă□□ă□£i¼□[V4270101]i¼□

参照ホイール

F50601	XRIDE FTS-X INT 27.5
--------	----------------------

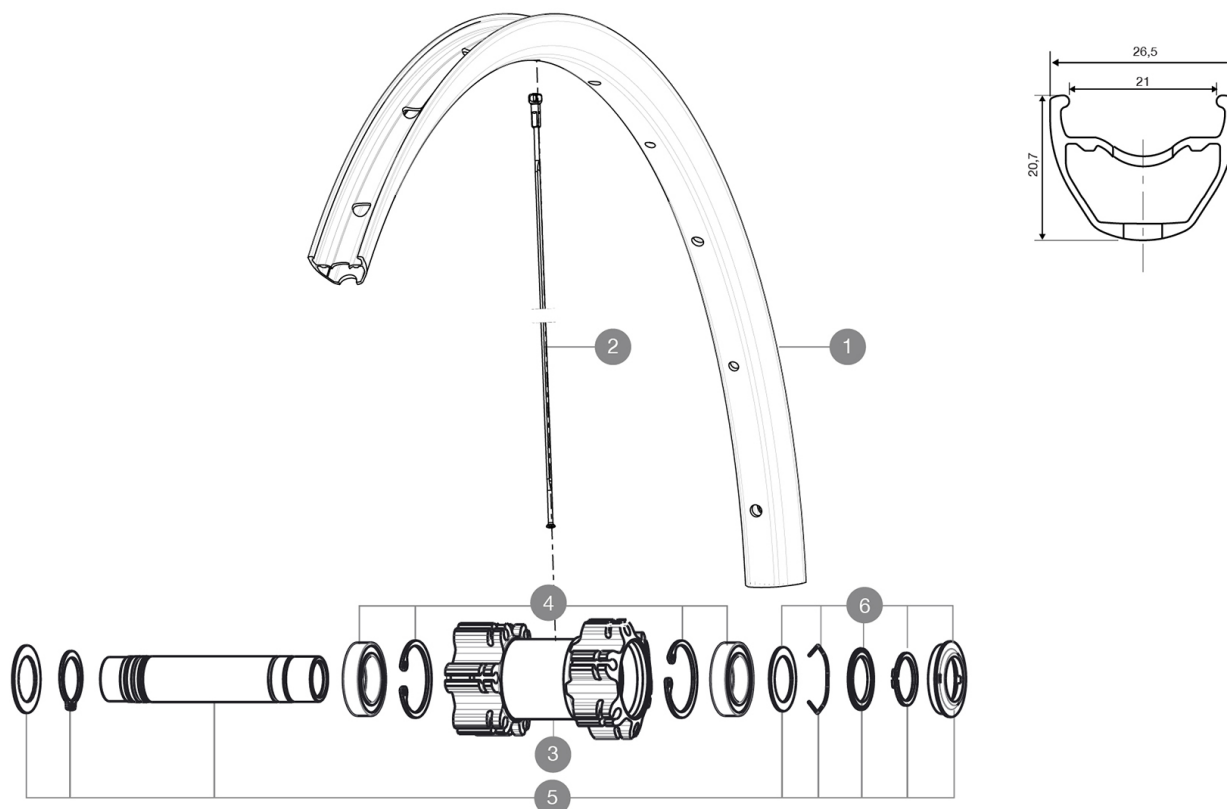

RIMS



バルブ穴径 (MM) : 8,5 WITH POP OFF REDUCER :

1	V2314815	RIM CROSSRIDE + CROSSRIDE FTSX 27.5
---	----------	-------------------------------------

SPOKES

2	V2381901	12 FRT + REAR NON-DRIVE SIDE SPOKES 279mm CROSSRIDE FTSX 27.
---	----------	---

HUB SHELLS

3	N/A	HUB BODY
4	99688501	BEARING KIT 9/15 D6T HUB
5	V2370101	KIT FRONT AXLE 15MM CROSSONE/-RIDE/-ROC - while stock last
5	V2371101	KIT FRONT QRM AXLE 100mm/BOOST 110mm
6	V2370301	FRONT AUTO ADJUST.PLAY KIT 15MM AXLE

COMPATIBILITY

[illegible]