

ASTM CATEGORY 3 : offroad with jumps less than 61cm


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 28 mm to 62 mm (1.1" to 2.5")

Recommended tyre sizes: 36 mm to 64 mm (1.4" to 2.5")

参照ホイール

FRONT WHEEL	N°	PARTS	REFERENCE	REFERENCE BOOST
	3BIS / 8BIS	HUB BODY	N/A	N/A
CROSSMAX ELITE	5 BIS	AXLE	V2372301	V2372401
	9 BIS	ADAPTORS	V2372501	V2372501

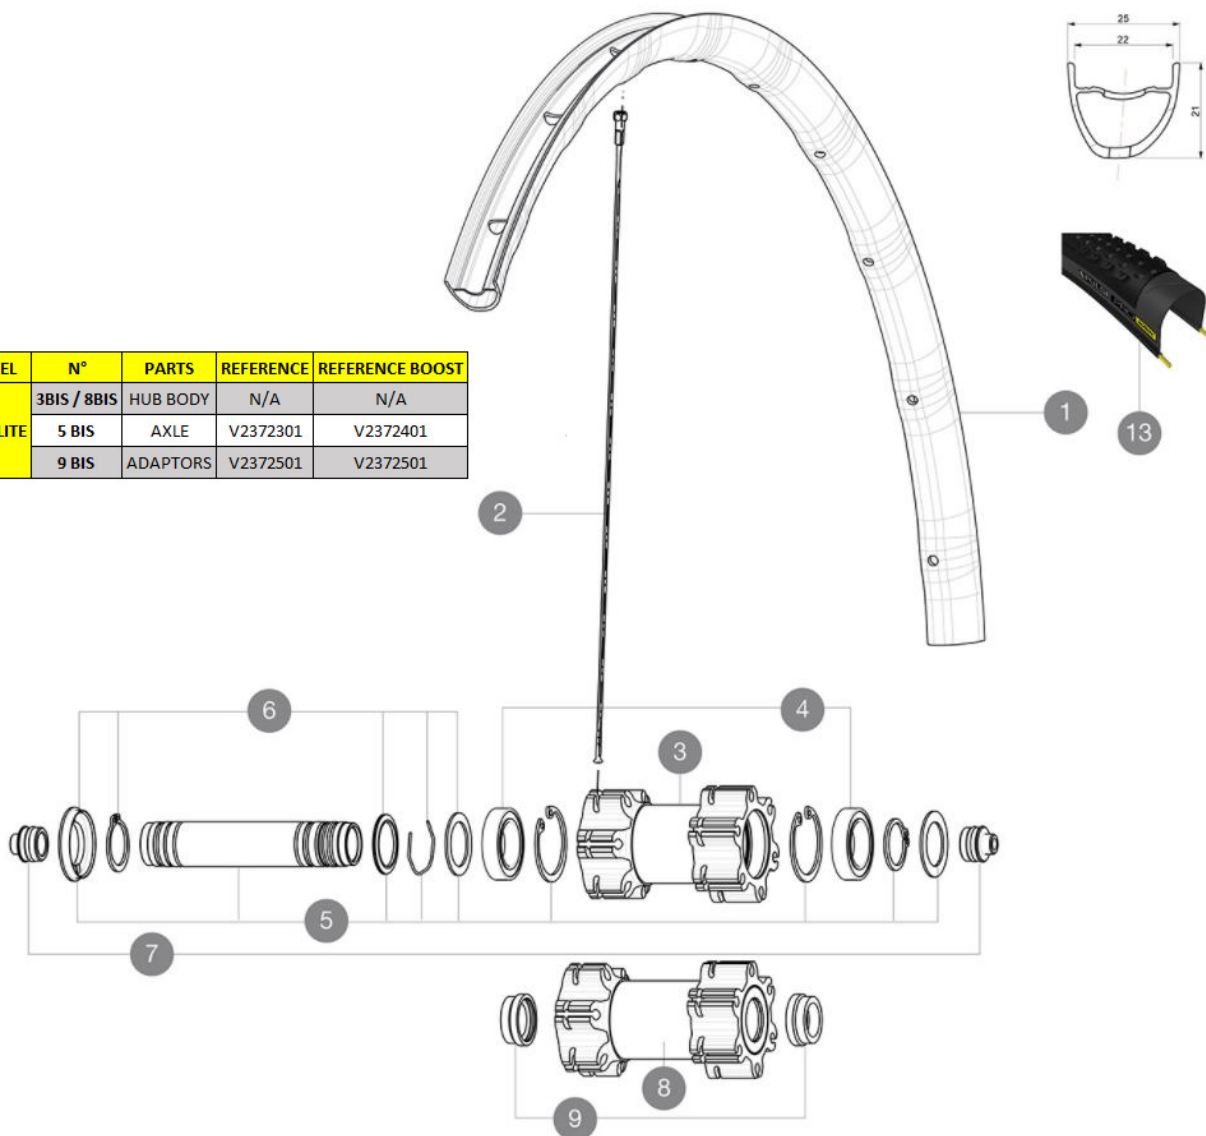

RIMS



ÄÖÅÄ«ÄÖÇ©'Ä%Öİ¼MMİ¼Öİ¼Ö6,5 :

1	V2960115	KIT FRONT/REAR RIM CROSSMAX ELITE 27,5" 22mm RED
1	V2940115	KIT FRONT/REAR RIM CROSSMAX ELITE 27,5" 22mm BLACK
	V2620101	USP RIM TAPE 25mm (for 21-24mm wide rim)

SPOKES

2	V2381101	12 FRT + REAR NON-DRIVE SIDE SPOKES 277mm CROSSRIDE TUBELESS
---	----------	--

HUB SHELLS

3	N/A	HUB BODY
3	N/A	HUB BODY
	N/A	HUB BODY
4	99688501	BEARING KIT 9/15 D6T HUB
5	V2371101	KIT FRONT QRM AXLE 100mm/BOOST 110mm
	V2372301	KIT 100mm AXLE QRM AUTO MTB > 2019
	V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019

6	V2370301	FRONT AUTO ADJUST.PLAY KIT 15MM AXLE
8	N/A	HUB BODY
8	N/A	HUB BODY
	N/A	HUB BODY
10	N/A	HUB BODY
11	M40771	BEARING KIT FOR LEFTY HUB
12	36709301	ASSEMBLY KIT CROSSROC SUPERMAX

TYRES

13	39243121	Pulse Pro 27,5" 2.1
13	39243132	Pulse Pro 27,5" 2.25

ADAPTERS

7	99694101	2 REDUCERS 15/9mm
9	V2371301	YELLOW AXLE SUPPORTS FRONT BOOST 110mm FOR SELF
	V2372501	ADJUSTING AXLE 15mm MTB 730c Cap QRM Auto From 2019

MAVIC Crossmax Elite

付属品

1 bottle of Mavic Sealant (355 466 01) 1	
BX601 $\hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i$ (V24 503 01 $\hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i$ V24 504 01 $\hat{A}_i \hat{A}_i$)	
BR101 quick releases (M40350 frt, M40351 rear road, M40352 rear MTB) 1	
Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1	
Front QR adapters (996 941 01 for MTB or B41 043 01 for road) 1	
ITS4 $\hat{A}_i \hat{A}_i \hat{A}_i$ TS2 $\hat{A}_i \hat{A}_i \hat{A}_i$ QRA $\hat{A}_i \hat{A}_i \hat{A}_i$ (308 731 01)	
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1	
Rear 12x142mm adapters for ITS4 and TS2 (308 593 01 for ITS4, 329 650 01 for TS2) 1	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
Tubeless rim tape	
Tubeless rim tape	

COMPATIBILITY

Freewheel: Shimano/Sram, convertible to XD with optional driver body	
Freewheel: Shimano/Sram or XD	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with included adapters	

Specifications

リム

- Material : Mxtral
- Material : Mxtral
- Joint : SUP
- Joint : SUP
- Drilling : traditional
- Drilling : traditional
- Weight reduction : ISM 4D
- Weight reduction : ISM 4D
- Valve hole diameter : 6.5 mm
- Valve hole diameter : 6.5 mm
- Tyre : UST Tubeless and tubetype
- Tyre : UST Tubeless and tubetype
- Internal width : 22 mm
- Internal width : 22 mm
- ETRTO size 27.5" : 584x22ss
- ETRTO size 27.5" : 584x22ss
- ETRTO size 29" : 622x22ss
- ETRTO size 29" : 622x22ss
- Hookless profile
- Use with Mavic Tubeless Tape
- Use with Mavic Tubeless Tape

スポーク

- Material : steel
- Material : steel
- Shape : straight pull, bladed, double butted
- Shape : straight pull, bladed, double butted

ホイールハブ

- Front and rear bodies : aluminum
- Front and rear bodies : aluminum
- Axle material : aluminum
- Axle material : aluminum
- Sealed cartridge bearings
- Sealed cartridge bearings
- Freewheel : ITS-4 alloy
- Freewheel : ITS-4 alloy

VERSIONS

- Color : Black or Black/Red
- Color : Black or Black/Red
- Disc standard : 6 Bolts only
- Disc standard : 6 Bolts only
- Hub width : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- Hub width : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- Lefty Supermax
- Lefty Supermax

ホイールの重み

ホイール重量 (クイックリリースおよびクリンチャー/チューブラーを除く) (g) :
Weight Front 27.5": 750
Weight Front 29": 785