

ASTM E1300 1/4" axle diameter 1: 1/8" axle diameter


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 21 to 28 mm

23mm 8.7 bars - 125 psi

参照ホイール

F70741 IO 17 700

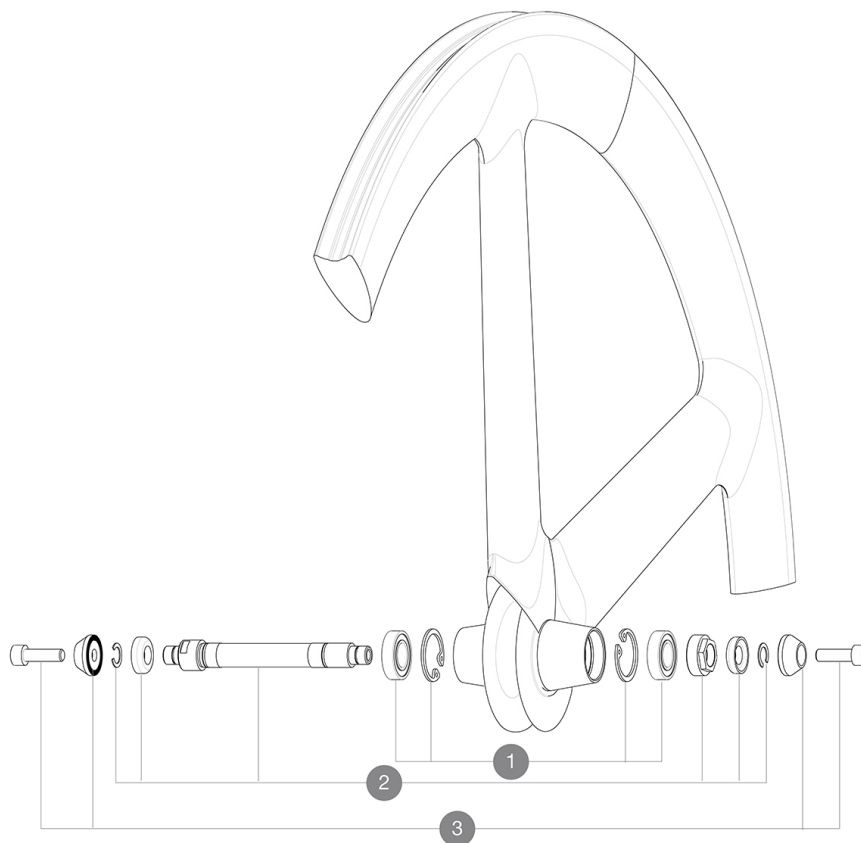


















HUB SHELLS

1	M40131	KIT BEARINGS FRONT 12x24x6 6901 (IO track)
2	M40130	FRONT IO AXLE + ADJUSTING NUT
3	M40124	M6 AXLE BOLTS FRT TRACK WHEEL

ADAPTERS

V2372501	15mm MTB Axle Cap QRM Auto From 2019
----------	--------------------------------------

## 付属品

User guide	
Wheelbag (V24 801 01) 1	
Fixing nuts (M40124) 1	
Fixing nuts (M40124) 1	
Fixing nuts (M40124) 1	
Fixing nuts (M40124) 1	
Fixing nuts (M40124) 1	
Fixing nuts (M40124) 1	
Fixing nuts (M40124) 1	
Valve extender (118 952 01) 1	
Valve extender (118 952 01) 1	
Valve extender (118 952 01) 1	
Valve extender (118 952 01) 1	
Valve extender (118 952 01) 1	
Valve extender (118 952 01) 1	
Valve extender (118 952 01) 1	
Valve extender (118 952 01) 1	
Wheelbag (V24 801 01) 1	

## COMPATIBILITY

ID360 XD-R	
FTS-L	