


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm
 For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included
 Recommended tyre sizes: 25 to 32 mm
 23mm 8.7 bars - 125 psi, 25mm 7.7 bars - 110 psi
 Max. Pressure: 25mm 7.7 bars - 110 PSI

参照ホイール

F70841 Cosmic Pro Car SL T Ft

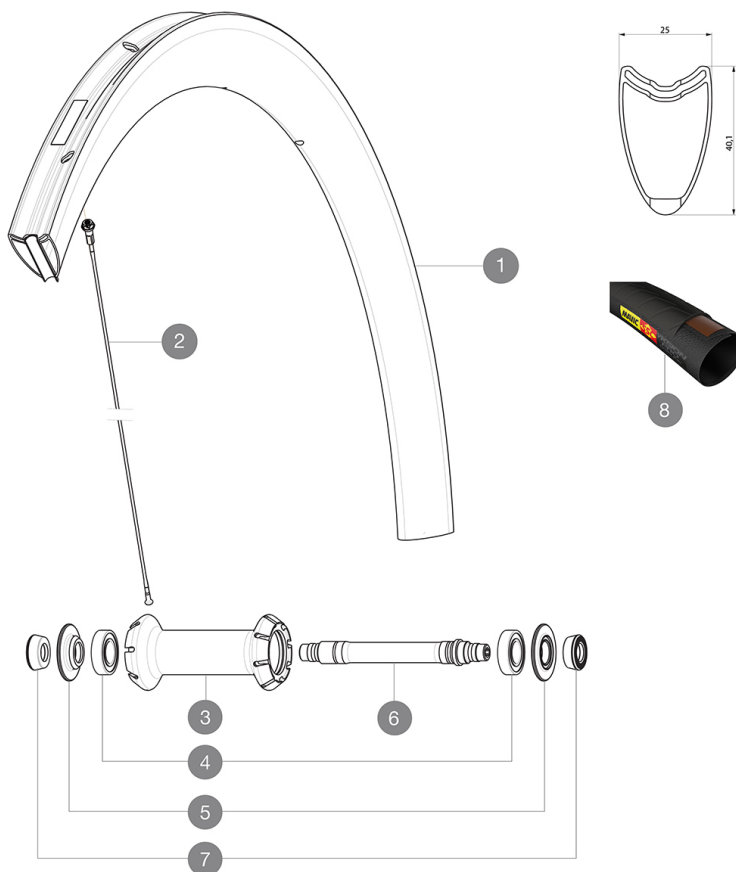

RIMS



&NBSP;:

1	V2406510	KIT FRONT RIM COSMIC PRO CARBON SL TUBULAR
---	----------	--

SPOKES

2	V3662201	KIT 12 FRT COSMIC PRO CARB SL T/C/UST & NDS CPC SL BUTTED
2	V2273901	9 FT BTD AERO SPK 271mm/ALU NIPPLE/WASHER - while stock

HUB SHELLS

3	N/A	HUB BODY
4	M40078	FRONT HUB 6901 BEARINGS
5	V2252501	FRONT SETTING NUT & DUST PROTECTOR MY16
6	30870001	FRONT AXLE ROAD RIM BRAKING QRM +

TYRES

8	37804425	Yksion Pro GripLink Tubular SSC 25
---	----------	------------------------------------

ADAPTERS

7	35117301	FRONT OR REAR FORK REST KIT R-SYS 2013
---	----------	--



Cosmic Pro Carbon SL T

付属品

BR601 quick releases (V24 501 01 frt, V24 502 01 rear) 1	
BR601 quick releases (V24 501 01 frt, V24 502 01 rear) 1	
Carbon brake pads (V24 603 01 Shimano/Sram, V24 604 01 Campagnolo) 1 pair	
Carbon brake pads (V24 603 01 Shimano/Sram, V24 604 01 Campagnolo) 1 pair	
Multifunction adjustment wrench (325 423 01) 1	
Multifunction adjustment wrench (325 423 01) 1	
User guide	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram or Campagnolo, convertible to XD-R with optional driver body	
<p> 対応する製品は、Shimano/Sram/Campagnoloのフリーホイールです。XD-R対応の製品は、オプションのドライバーボディが必要です。 </p>	
Front axle: Quick Release only	
Front axle: Quick Release only	
Rear axle: Quick Release only	
Rear axle: Quick Release only	

Specifications

- リム**
- Material : 3K carbon fibers
 - Material : 3K carbon fibers
 - Height : 40 mm
 - Height : 40 mm
 - Drilling : traditional
 - Drilling : traditional
 - Brake track : carbon with TgMAX technology
 - Brake track : carbon with TgMAX technology
 - Valve hole diameter : 6.5 mm
 - Valve hole diameter : 6.5 mm
 - ETRTO size : 28" tubular
 - ETRTO size : 28" tubular
- スポーク**
- Material : steel
 - Material : steel
 - Shape : straight pull, bladed, double butted
 - Nipples : aluminum, ABS
 - Nipples : aluminum, ABS
 - Count : front 16, rear 20
 - Count : front 16, rear 20
 - Lacing : front radial, rear Isopulse
 - Lacing : front radial, rear Isopulse

- ホイールハブ**
- Front and rear bodies : aluminum
 - Front and rear bodies : aluminum
 - Axle material : aluminum
 - Axle material : aluminum
 - Sealed cartridge bearings
 - Freewheel : Instant Drive 360
 - Freewheel : Instant Drive 360

VERSIONS

- Color : Black only
- Color : Black only

- ホイールの重み**
- ホイール重量 (クイックリリースおよびクリンチャー/チューブラーを除く) (g) : 620