


ASTM CATEGORY 3 : offroad with jumps less than 61cm

Recommended tyre sizes: 36 mm to 64 mm (1.4" to 2.5")

## 参照ホイール

F73731 Xmx27,5FtBst

F73271 Xmx27,5Ft

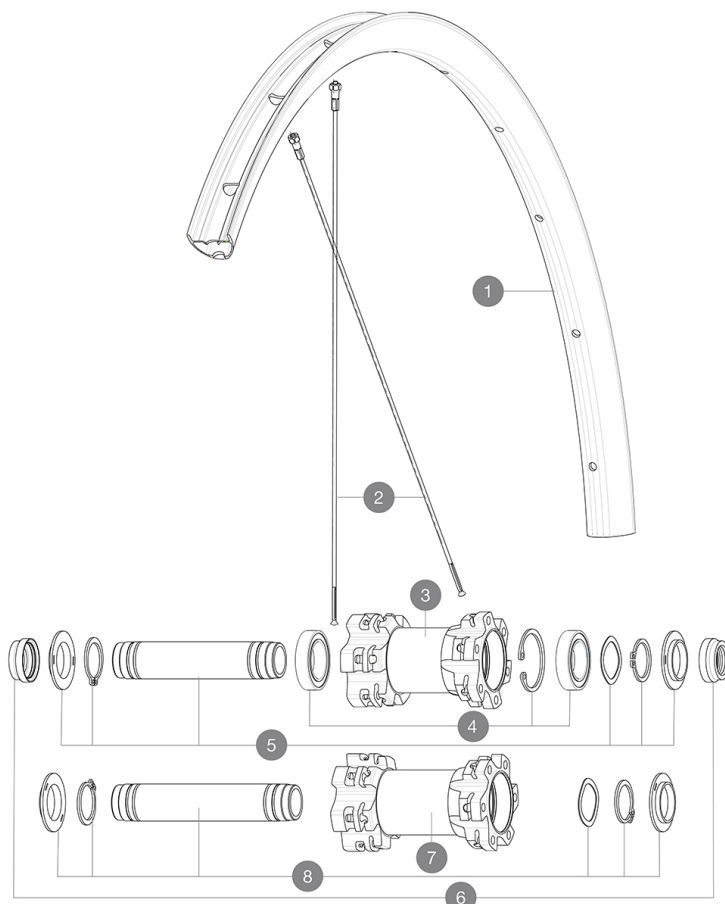

## RIMS



&NBSP;:

1	V2317815 V2620101	KIT FRONT/REAR RIM CROSSMAX 27,5" 22TSS UST RIM TAPE 25mm (for 21-24mm wide rim)
---	----------------------	---

## SPOKES

2	V2385301	KIT 12 FT/NDS CROSSMAX LIGHT 27,5" SPK 278mm
---	----------	--

## HUB SHELLS

3	N/A	HUB BODY
4	99688501	BEARING KIT 9/15 D6T HUB
5	V2371901	KIT FRONT AXLE MTB L1 QRM AUTO 15x100mm
7	N/A	HUB BODY
8	V2372001	KIT FRONT AXLE MTB L1 QRM AUTO BOOST 15x110mm

## ADAPTERS

6	V2390801 99694101	KIT 2 FORK RESTS FRONT AXLE MTB QRM AUTO 2 REDUCERS 15/9mm
---	----------------------	---

# MAVIC Crossmax

## 付属品

UST (129 838 01)	

## COMPATIBILITY

Freewheel: Shimano/Sram or XD	
15mm thru axle, convertible to Quick Release with optional adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	

## Specifications

### リム

- S6000
- SUP
- 6.5 mm
- UST
- 22 mm
- ETRTO size 27.5" : 584x22ss
- ETRTO size 29" : 622x22ss

### スポーク

- 110
- 148
- 135/142

### ホイールハブ

- TS-2

### VERSIONS

- 6A
- 110
- 148
- 10
- 0A
- 135/142

### ホイールの重み

- Weight Front 27.5": 810
- Weight Front 29": 845