


ASTM CATEGORY 5 : extreme offroad
Recommended tyre sizes: 50 to 76 mm (2.0" to 3.0")

参照ホイール

P84751	DmxDH27,518Pr	F73371	DmxDH1827,5Ft
--------	---------------	--------	---------------

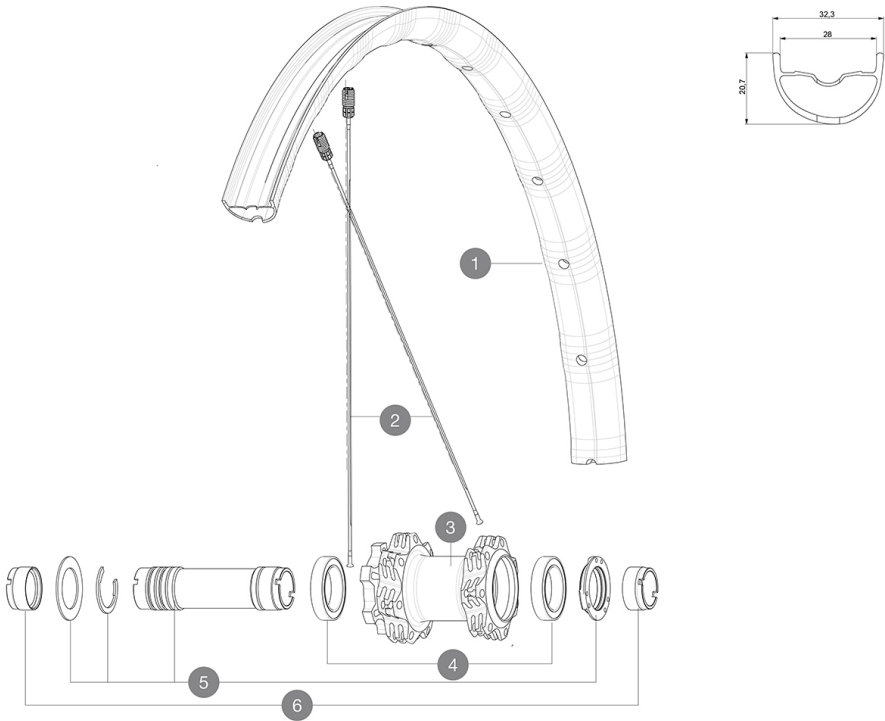

RIMS



&NBSP;:

1	V2318810	KIT FRONT RIM DEEMAX DH 27,5"
---	----------	-------------------------------

SPOKES

2	V2385801	KIT 14 FRONT BUTTED FLAT SPOKES 285mm
---	----------	---------------------------------------

HUB SHELLS

3	N/A	HUB BODY
4	M40179	FRONT BEARING 25x37x7 20mm AXLE
5	30870501	FRONT AXLE 20mm CROSSMAX ST/SX + DEEMAX ULTI 2012

ADAPTERS

6	12982901	20mm adapter for Crossmax ST/SX (front wheel)
	12982801	15mm ADAPTER KIT - 2012 WHEELS
	12982701	9mm Adapters + QR for Crossmax ST/SX (front wheel)



COMPATIBILITY

Freewheel: Shimano/Sram or XD	
Freewheel: Shimano/Sram or XD	
20mm 15mm	
20mm 15mm	
Rear axle : 12x157mm, convertible to 12x150 with optional adapters	
Rear axle : 12x157mm, convertible to 12x150 with optional adapters	
20mm 15mm	

ホイールの重み

- [illegible]

[illegible][illegible]