


ASTM A1328 1 : 120
25 32mm
2 23mm 8.7 bars - 125 psi, 25mm 7.7 bars - 110 psi

参照ホイール

F85401 Comete Pro Carb SL T 19 Ft NT

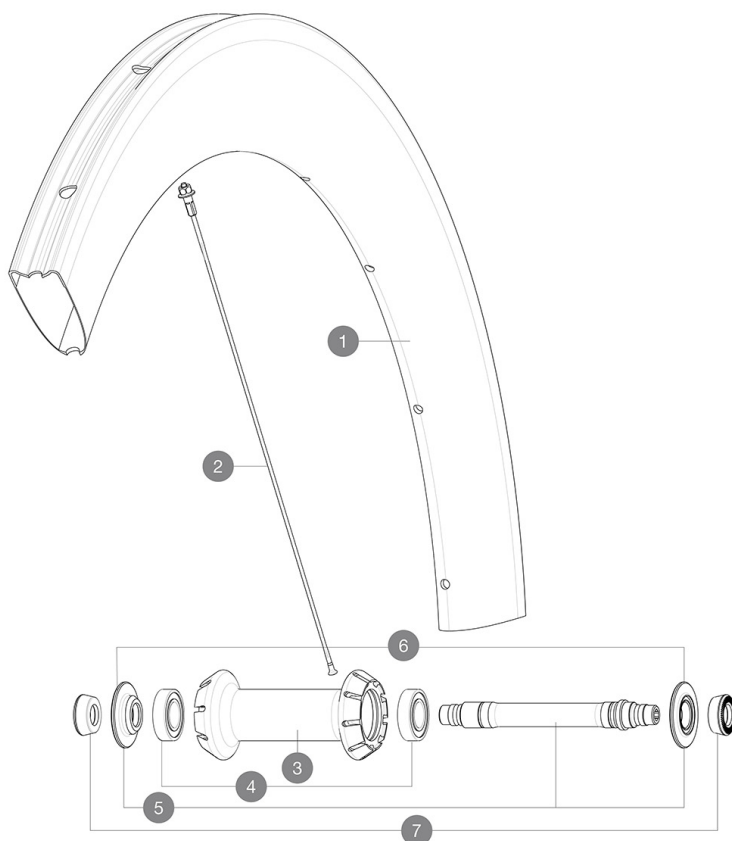

RIMS



&NBSP;:

1	V2737410	KIT FRONT RIM COMETE PRO CARBON SL T 19
---	----------	---

SPOKES

2	V3666101	KIT 2 FRT 247/2 NDS 261 COMETE PRO CARB SL T/UST AERO
2	V3663101	KIT 2 FRT BUTTED AERO STAINLESS SPOKE 247 + alu nipple + wa

HUB SHELLS

3	N/A	HUB BODY
4	M40078	FRONT HUB 6901 BEARINGS
5	30870001	FRONT AXLE ROAD RIM BRAKING QRM +
6	V2252501	FRONT SETTING NUT & DUST PROTECTOR MY16

ADAPTERS

7	35117301	FRONT OR REAR FORK REST KIT R-SYS 2013
---	----------	--



Comete Pro Carbon SL T

付属品

BR601 323 485 01 323 486 01	
BR601 323 485 01 323 486 01	
V24 603 01 604 01	
V24 603 01 604 01	
(118 952 01)	
(118 952 01)	
(325 423 01)	
(325 423 01)	

COMPATIBILITY

Specifications

リム
 • 3K
 • 3K
 64mm
 64mm
 + iTgMAX
 + iTgMAX
 6.5mm
 6.5mm
 28" 28"
 28" 28"
 スポーク
 ABS
 ABS
 20Å
 20Å

ホイールハブ
 QRM+
 QRM
 QRM+
 QRM
 360
 360

ホイールの重み

VERSIONS
 Å