



E-DEEMAX S 30 29

[illegible]

60mm 76mm (2.35" 3.0")

Maximum tyre pressure: 2.95bar/43PSI with a 52mm tyre - 1.55bar/22PSI with a 125mm tyre



æ□□â°□ã□;ã□¤ã□¤ã□μã□¤ã□°i¼□â¹ 52mm-

æ□□å¤§ç©°æ°□å□§2.95Bar/43PSI

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg. Ebike included

参照ホイール

F91623	E-DEEMAX S 30 INT 29 BST	F91633	E-DEEMAX S 30 CL 29 BST
--------	--------------------------	--------	-------------------------

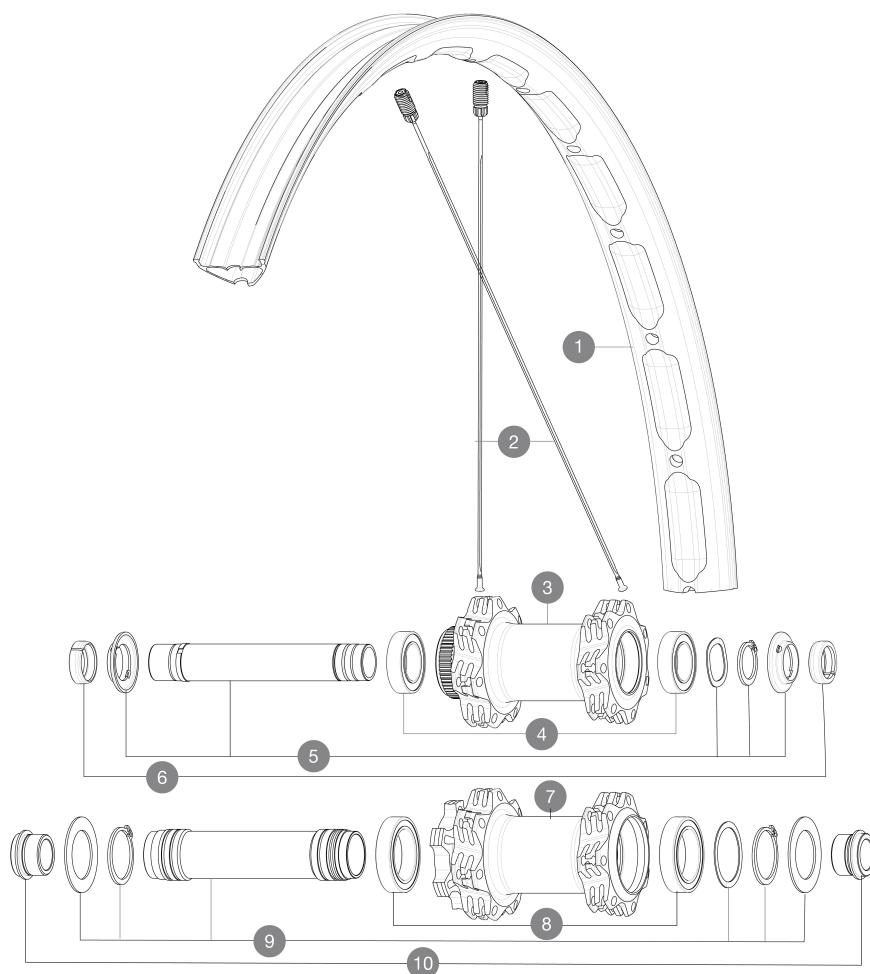

RIMS



&NBSP;::

1	V3766415	Kit Front/Rear rim eDeemax S 29
	V3750101	35mm UST Green Tape for 30mm wide rims

SPOKES

2	V2388501	Kit 14 Front eDeemax S 29" butted spoke 306 M7/7
---	----------	--

HUB SHELLS

3	N/A	HUB BODY
4	V2500901	KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
5	V2375601	Kit 110mm axle QRM auto MTB from 2019 DCL
7	N/A	HUB BODY
8	M40179	FRONT BEARING 25x37x7 20mm AXLE
9	V2373701	KIT 20x110mm BOOST AXLE QRM AUTO MTB > 2019

OPTIONS

V2650401	TORQUECAP20*31 FT QRM AUTO MTB
V2374401	TORQUE CAPS 15*31 Adapter MTB QRM Auto > 2019 Frt HUB

ADAPTERS

6	V2372501	15mm MTB Axle Cap QRM Auto From 2019
10	12982801	15mm ADAPTER KIT - 2012 WHEELS
	V2680401	20x110 BOOST Front Adapter MTB wheels
	99694101	2 REDUCERS 15/9mm

COMPATIBILITY

[illegible]

Specifications

ホイールの重み

960