





DEEMAX 27,5

ASTM A 661 5: 60mm x 76mm (2.35" x 3.0")
Maximum tyre pressure: 3.2bar/46PSI with a 47mm tyre - 2.85bar/41PSI with a 64mm tyre

参照ホイール

F92221	Deemax 27,5 21 Ft	F92231	DEEMAX INT 27,5 BST
--------	-------------------	--------	---------------------

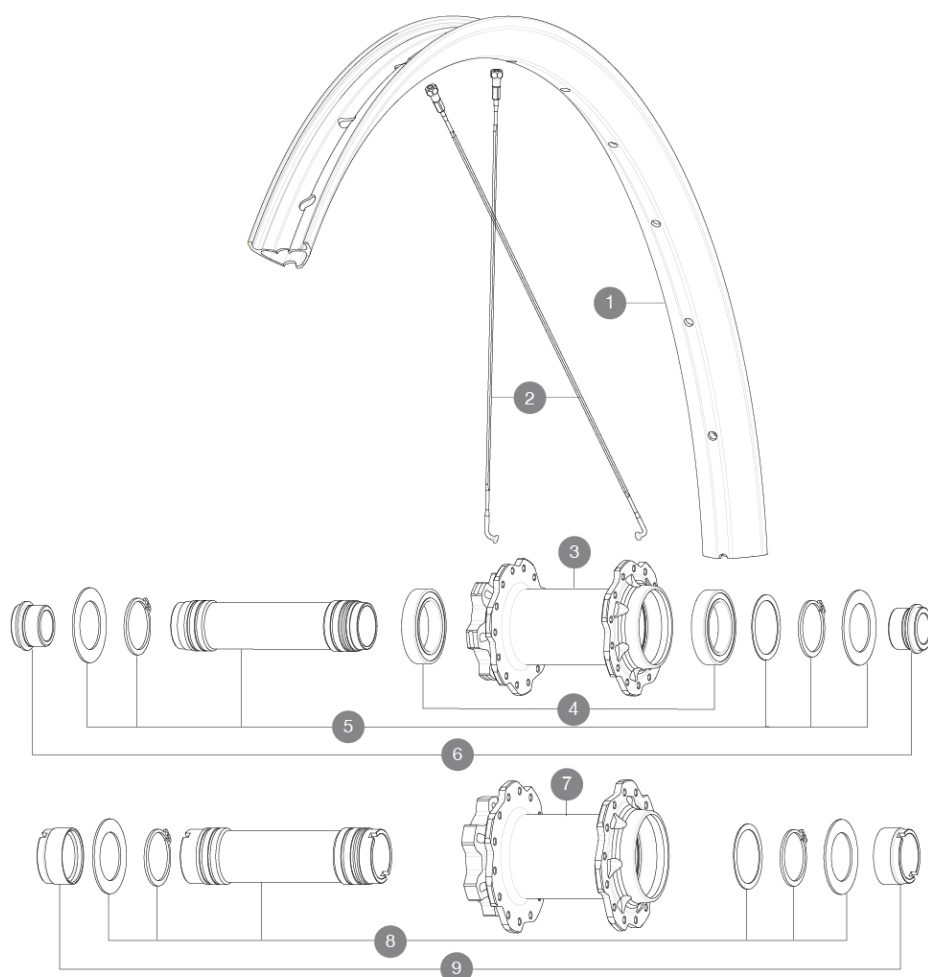

RIMS



&NBSP;::

1	V2640101	UST RIM TAPE 32mm for 28 to 29mm wide rims
	V3766315	Kit Front/Rear rim Deemax 21 27.5"

SPOKES

2	V2388001	KIT 14 J BENT STEEL SPOKES 281mm DEEMAX DH 27.5" + black st
---	----------	---

HUB SHELLS

3	N/A	HUB BODY
4	M40179	FRONT BEARING 25x37x7 20mm AXLE
5	V2373701	KIT 20x110mm BOOST AXLE QRM AUTO MTB > 2019
7	N/A	HUB BODY
8	V2373801	KIT 20x110mm AXLE QRM AUTO MTB > 2019

ADAPTERS

6	12982801	15mm ADAPTER KIT - 2012 WHEELS
9	12982901	20mm adapter for Crossmax ST/SX (front wheel)

COMPATIBILITY

[illegible]