




Ksyrium Pro Disc

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included

参照ホイール

R58601	KsyProDisc16 CLRr	R58401	KsyProDisc16 INTRr
--------	-------------------	--------	--------------------

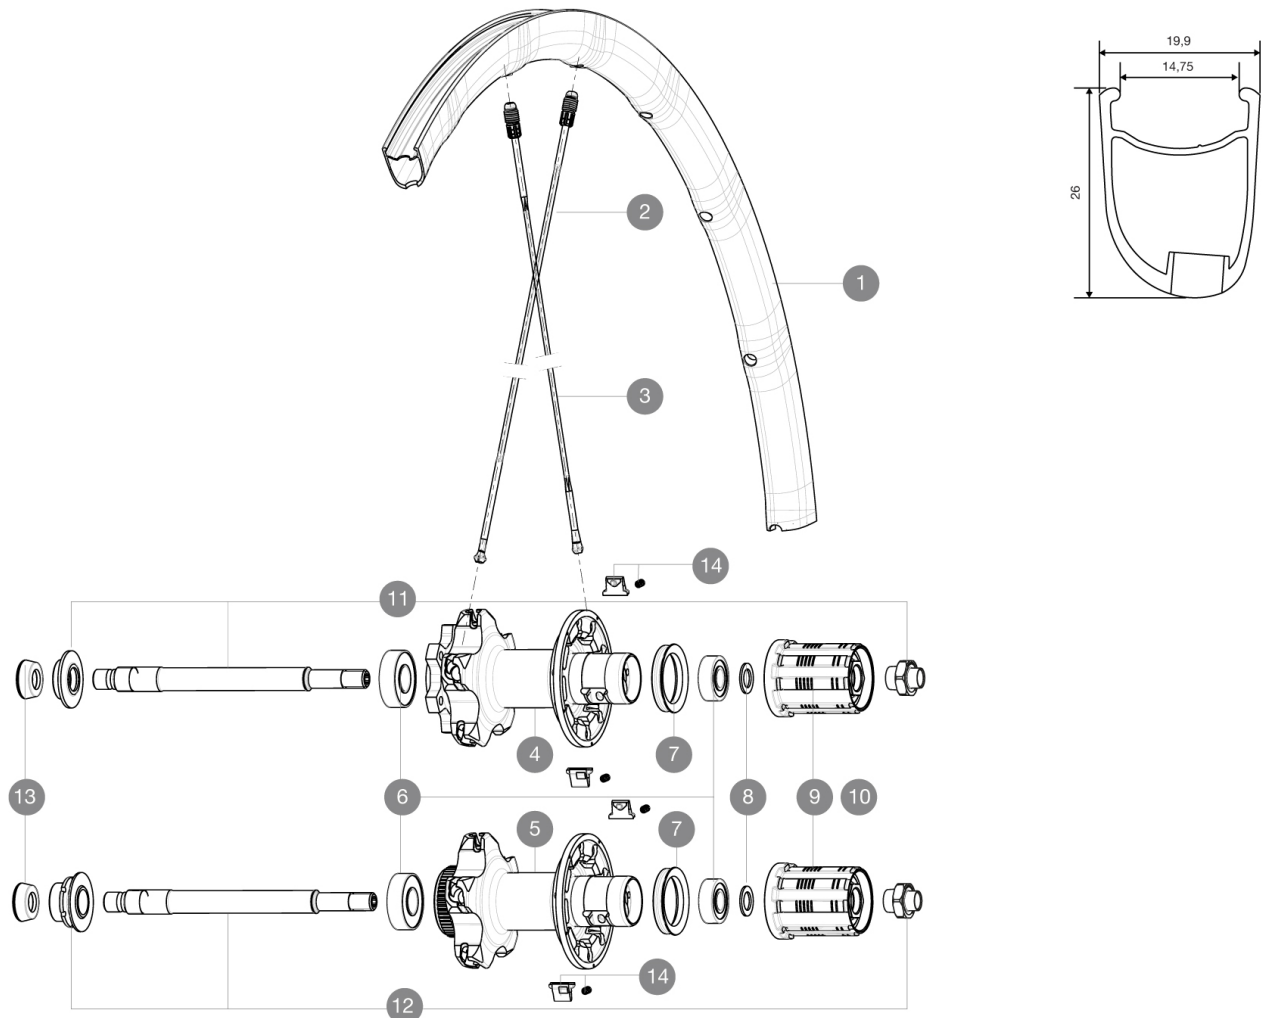

RIMS



Ã□□Ã□«Ã□□Ç©'Å³/₄□İ¹/₄□MMİ¹/₄□İ¹/₄□6,5 :

1	V2290613	KIT REAR RIM KSYRIUM PRO DISC
---	----------	-------------------------------

SPOKES

2	12029401	10 BLK DRIVE SIDE SPOKES R-SYS SLR CLINCH.294mm
3	V2270501	SPOKES KIT DRIVE SIDE KSYRIUM PRO DISC

HUB SHELLS

4	N/A	HUB BODY
5	N/A	HUB BODY
6	V2540101	REAR HUB B9+6001 BEARINGS 2015
7	99500001	FTSL/FTSX FREEHUB BODY SEAL
8	30872801	SET OF 3 INTERNAL SILVER SPACERS 9mm FTS-L 2013
9	30871101	FTS-L FREEWHEEL BODY HG11 2013 (8 or 9mm axle compatible)
10	30871201	FTS-L FREEWHEEL BODY ED11 2013 (8 or 9mm axle compatible)
11	V2250601	KIT REAR AXLE KSYRIUM PRO DISC 6T
12	V2250401	KIT REAR AXLE KSYRIUM PRO DISC CL
14	M40578	FTSL PAWLS KIT (ROAD WHEELS)

ADAPTERS

13	35117301	FRONT OR REAR FORK REST KIT R-SYS 2013
----	----------	--



Ksyrium Pro Disc

付属品

BX601 quick releases	
Front 12 mm adapters	
Rear QR adapters	
Specific disc bolts	
Multifonction adjustment wrench	
User guide	

Specifications

リム

- Material : Mxtral
- Height : 26mm, asymmetrical
- Joint : SUP
- Drilling : Fore
- Disc brake specific profile
- Weight reduction : ISM 4D
- Valve hole diameter : 6.5 mm
- Tyre : clincher
- ETRTO size : 622x15C
- Recommended tyre sizes : 21 to 32 mm

スポーク

- Material : Zicral
- Shape : straight pull, bladed
- Nipples : Fore integrated aluminum
- Count : 20 front and rear
- Lacing : front crossed 2, rear Isopulse

ホイールハブ

- Front body : carbon with aluminum flanges
- Rear body : aluminum
- Axle material : aluminum
- Adjustable sealed cartridge bearings
- Freewheel : FTS-L steel
- Front : Quick release, 12 thru and 15 thru compatible

ホイールの重み

ホイール重量 (クイックリリース
スおよびクリンチャー/チュー
ブラーを除く) (g) : 855