



Ksyrium Pro Carbon SL T

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included

23 32 mm

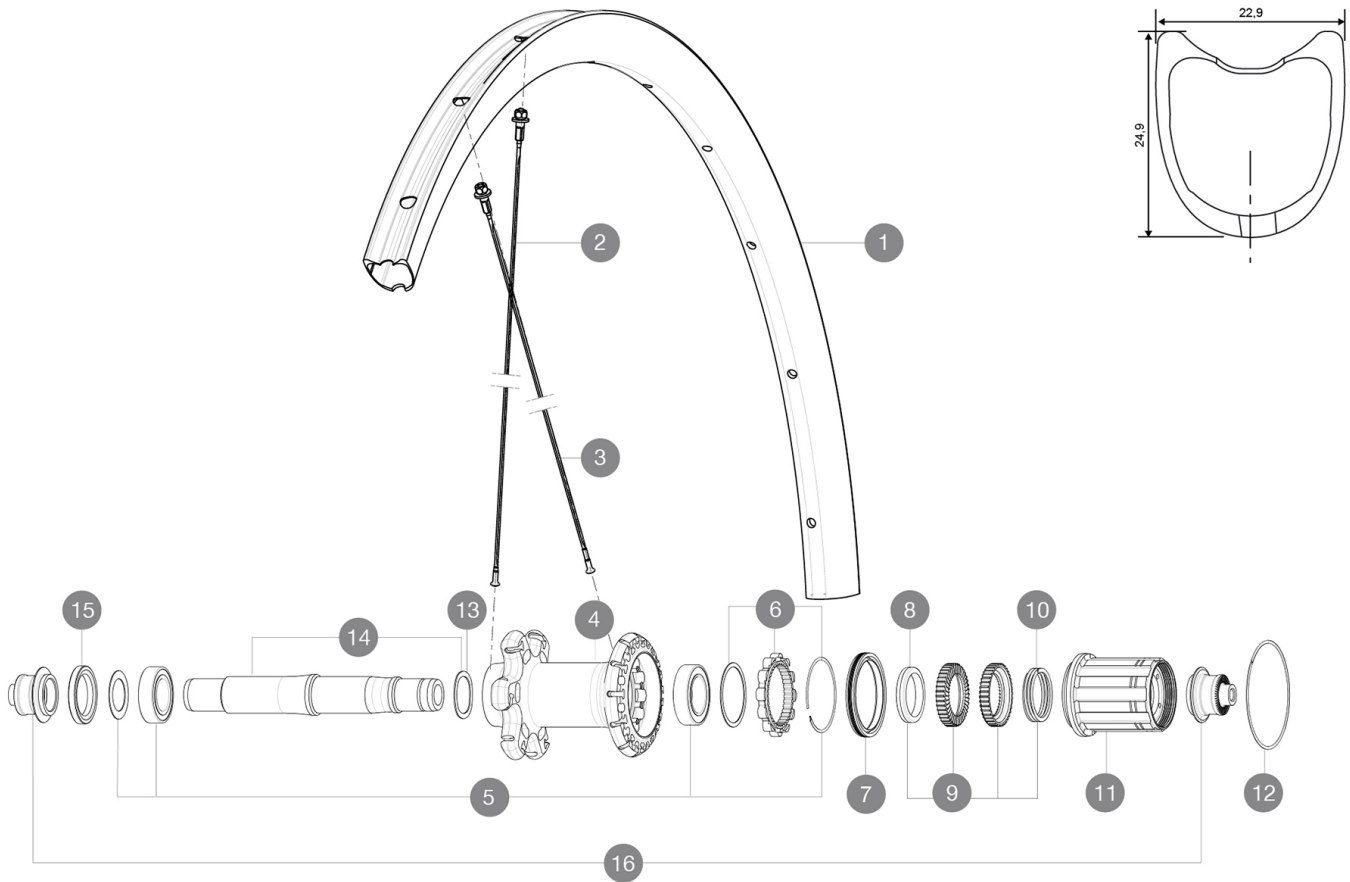
Recommended tyre sizes: 25 to 52 mm

23mm 8.7 bars - 125 psi, 25mm 7.7 bars - 110 psi

Max. Pressure: 25mm 7.7 bars - 110 PSI

参照ホイール

R62801	KProCarb SL T Rr
--------	------------------



RIMS



バルブ穴径 (MM) : 6,5 :

1	V2403213	KIT RR RIM KSYRIUM PRO CARBON SL TUB. - while stock last
1	V2738613	KIT REAR RIM KSYRIUM PRO CARBON SL T 19

SPOKES

2	V3663301	KIT 12 FRT KSYR PRO CARB SL UST Disc + NDS KSYR PRO CARB
2	V2271501	KIT 12 FT KSY PRO CARB SL D/NDS KSY PRO CARB SL SPK 291mm
3	V3663201	KIT 12 DS KSY PRO CARB SL UST/UST Disc/C Disc/T Disc BUTTED
3	V2271401	KIT 12 DS KSYRIUM PRO CARB SL T SPOKE 273mm - while stock la

HUB SHELLS

4	N/A	HUB BODY
5	V2560101	KIT ID360 BEARINGS 15/26/7 + 17/28/7
6	V2252701	KIT ID360 INSERT SHAPED EAR LOBE > 2017
7	V2251601	ID360 SEAL + GREASE
8	V2500501	Kit 3 ID360 pad for noise reduction
9	V2251701	ID360 2 RATCHETS + SPRING + GREASE
10	V2251801	KIT 3 ID360 ROAD SPRINGS
11	V3430101	HG11 Freewheel Body ID360
12	V2252201	KIT 2 REAR HUB RETENTION RINGS 48mm
13	V2251501	3 ID360 WAVE WASHERS
14	V2251201	ID360 AXLE UB

15 V2250901 KIT ID360 HUB THREADED CAP for UB model (small)

TYRES

17	37804625	Yksion Pro PowerLink Tubular SSC 25
----	----------	-------------------------------------



ADAPTERS

16	B4989401	Rear axle adapters 9mm QR
----	----------	---------------------------



Ksyrium Pro Carbon SL T

付属品

BR601 quick releases	
BR601 quick releases	
BR601 quick releases	
Carbon brake pads	
Carbon brake pads	
Carbon brake pads	
User guide	
Multifunction adjustment wrench (325 423 01) 1	
Multifunction adjustment wrench (325 423 01) 1	
User guide	
User guide	

COMPATIBILITY

1. Front axle: Shimano/Sram or Campagnolo, convertible to XD-R with optional driver body	
2. Front axle: Quick Release only	
3. Front axle: Quick Release only	
4. Rear axle: Quick Release only	
5. Rear axle: Quick Release only	

Specifications

リム

- Material : 100% woven 3K carbon fiber
- Height : 25mm
- Drilling : traditional
- Material : 3K carbon fibers
- Material : 3K carbon fibers
- Brake track : carbon with TgMAX technology
- Valve hole diameter : 6.5 mm
- Tyre : tubular
- ETRTO size : 28" tubular
- Height : 25mm
- Height : 25mm
- Recommended tyre sizes : 25 to 52 mm
- Drilling : traditional
- Drilling : traditional
- Brake track : carbon with TgMAX technology
- Brake track : carbon with TgMAX technology
- Brake track : carbon
- Valve hole diameter : 6.5 mm
- Valve hole diameter : 6.5 mm
- Tyre : tubular
- Tyre : tubular
- ETRTO size : 28" tubular
- ETRTO size : 28" tubular

スポーク

- Material : steel
- Shape : straight pull, bladed, double butted
- Nipples : aluminum, ABS
- Count : front 18, rear 24
- Lacing : front radial, rear Isopulse
- Material : steel
- Material : steel
- Shape : straight pull, bladed, double butted
- Shape : straight pull, bladed, double butted

ホイールハブ

- Front and rear bodies : aluminum
 - Axle material : aluminum
 - Sealed cartridge bearings
 - Freewheel : Instant Drive 360
 - Front and rear bodies : aluminum
 - Front and rear bodies : aluminum
 - Axle material : aluminum
 - Axle material : aluminum
- $\hat{A}_1 \hat{A}_2 \hat{A}_3 \hat{A}_4 \hat{A}_5 \hat{A}_6 \hat{A}_7 \hat{A}_8 \hat{A}_9 \hat{A}_{10} \hat{A}_{11} \hat{A}_{12} \hat{A}_{13} \hat{A}_{14} \hat{A}_{15} \hat{A}_{16} \hat{A}_{17} \hat{A}_{18} \hat{A}_{19} \hat{A}_{20} \hat{A}_{21} \hat{A}_{22} \hat{A}_{23} \hat{A}_{24} \hat{A}_{25} \hat{A}_{26} \hat{A}_{27} \hat{A}_{28} \hat{A}_{29} \hat{A}_{30} \hat{A}_{31} \hat{A}_{32} \hat{A}_{33} \hat{A}_{34} \hat{A}_{35} \hat{A}_{36} \hat{A}_{37} \hat{A}_{38} \hat{A}_{39} \hat{A}_{40} \hat{A}_{41} \hat{A}_{42} \hat{A}_{43} \hat{A}_{44} \hat{A}_{45} \hat{A}_{46} \hat{A}_{47} \hat{A}_{48} \hat{A}_{49} \hat{A}_{50} \hat{A}_{51} \hat{A}_{52} \hat{A}_{53} \hat{A}_{54} \hat{A}_{55} \hat{A}_{56} \hat{A}_{57} \hat{A}_{58} \hat{A}_{59} \hat{A}_{60} \hat{A}_{61} \hat{A}_{62} \hat{A}_{63} \hat{A}_{64} \hat{A}_{65} \hat{A}_{66} \hat{A}_{67} \hat{A}_{68} \hat{A}_{69} \hat{A}_{70} \hat{A}_{71} \hat{A}_{72} \hat{A}_{73} \hat{A}_{74} \hat{A}_{75} \hat{A}_{76} \hat{A}_{77} \hat{A}_{78} \hat{A}_{79} \hat{A}_{80} \hat{A}_{81} \hat{A}_{82} \hat{A}_{83} \hat{A}_{84} \hat{A}_{85} \hat{A}_{86} \hat{A}_{87} \hat{A}_{88} \hat{A}_{89} \hat{A}_{90} \hat{A}_{91} \hat{A}_{92} \hat{A}_{93} \hat{A}_{94} \hat{A}_{95} \hat{A}_{96} \hat{A}_{97} \hat{A}_{98} \hat{A}_{99} \hat{A}_{100}$
- Sealed cartridge bearings
- Freewheel : Instant Drive 360
 - Freewheel : Instant Drive 360

VERSIONS

- Color : Black only
- Color : Black only

ホイールの重み

ホイール重量 (クイックリリースおよびクリンチャー/チューブラーを除く) (g) : 675