


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included
ETRTO recommended tyre sizes: 35mm to 69mm (1.4" to 2.7")

参照ホイール

R67701 DmaxUlti16Rr 26 12x150

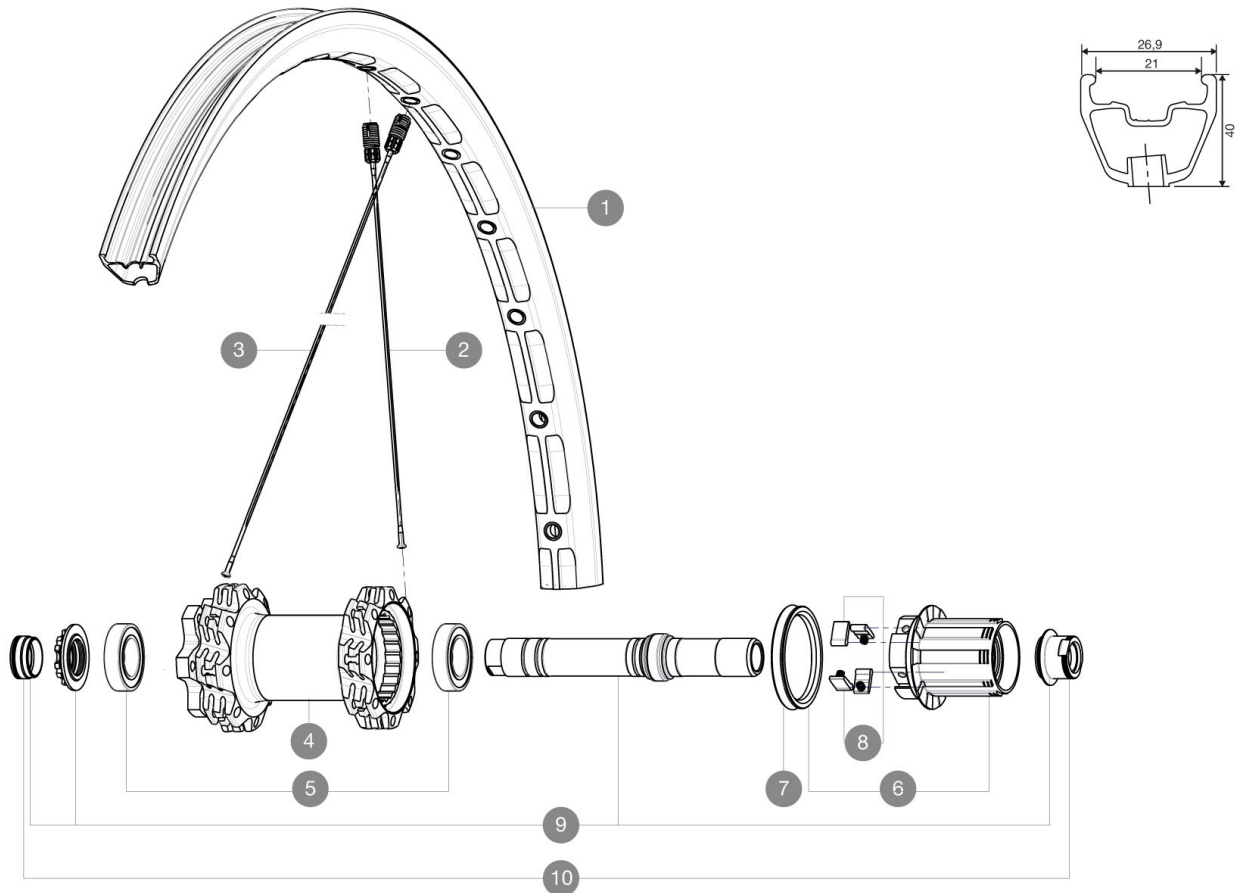

RIMS



バルブ穴径 (MM) : 6,5 :

1	99691913	REAR RIM DEEMAX ULTIMATE YELLOW
---	----------	---------------------------------

SPOKES

2	30864001	16 SPOKES M7/7 DEEMAX ULTIMATE 12 OPP.DRV 268mm
3	30863901	16 SPOKES M7/7 DEEMAX ULTIMATE 12 DRV 266mm

HUB SHELLS

4	N/A	HUB BODY
5	M40076	HUB BEARINGS 17x30x7 6903 x 2
6	35126001	ITS-4 FREEWHEEL BODY + SEAL 2013 (WITHOUT PAWLS)
7	99610701	ITS4 SEAL
8	99610601	ITS4 PAWLS KIT
9	30870201	REAR AXLE KIT ITS4 150mm 2012

ADAPTERS

10	30872201	FORK REST ITS-4 135mm REAR AXLE > 2012
----	----------	--



Deemax

付属品

UST valve and accessories	
Rear QR adapters	
Multifonction adjustment wrench	
User guide	
12x157mm adaptors (308 593 01 for ITS4)	
UST valve and accessories	
Multifonction adjustment wrench	
User guide	
12x157mm adaptors (308 593 01 for ITS4)	

COMPATIBILITY

Freewheel: Shimano/Sram, convertible to XD with optional driver body	
Front axle: 20mm, convertible to 15mm thru axle with optional adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapaters	

Specifications

リム

- Material : Maxtal
- Joint : SUP
- Drilling : Fore
- Disc brake specific profile
- Weight reduction : ISM with central spine
- Valve hole diameter : 6.5 mm
- Material : Maxtal
- Tyre : UST Tubeless and tubetype
- Internal width : 21 mm
- ETRTO size 26" : 559x21C
- ETRTO recommended tyre sizes : 35mm to 69mm (1.4" to 2.7")
- Joint : SUP
- Drilling : Fore
- Disc brake specific profile
- Weight reduction : ISM with central spine
- Valve hole diameter : 6.5 mm
- Tyre : UST Tubeless and tubetype
- Internal width : 21 mm
- ETRTO size 26" : 559x21C

スポーク

- Material : steel
- Shape : straight pull, bladed
- Nipples : Fore integrated aluminum
- Count : front 28, rear 32
- Lacing : front and rear crossed 3
- Material : steel
- Shape : straight pull, bladed
- Nipples : Fore integrated aluminum
- Count : front 28, rear 32
- Lacing : front and rear crossed 3

ホイールハブ

- Front and rear bodies : aluminum
- Axle material : aluminum
- Adjustable sealed cartridge bearings
- Freewheel : ITS-4 alloy
- Front and rear bodies : aluminum
- Shimano 11 speeds compatible
- Axle material : aluminum
- Sram XD Compatible (XX1-X01) with optionnal kit
- Adjustable sealed cartridge bearings
- Freewheel : ITS-4 alloy

VERSIONS

- Color : Black only
- Disc standard : 6 Bolts only

ホイールの重み

ホイール重量 (クイックリリー
スおよびクリンチャー/チュー
ブラーを除く) (g) :
Weight Rear 26": 1055
Weight Rear 27.5": 1085