


Crossmax XL pro Ltd 27.5 WTS

参照ホイール

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included

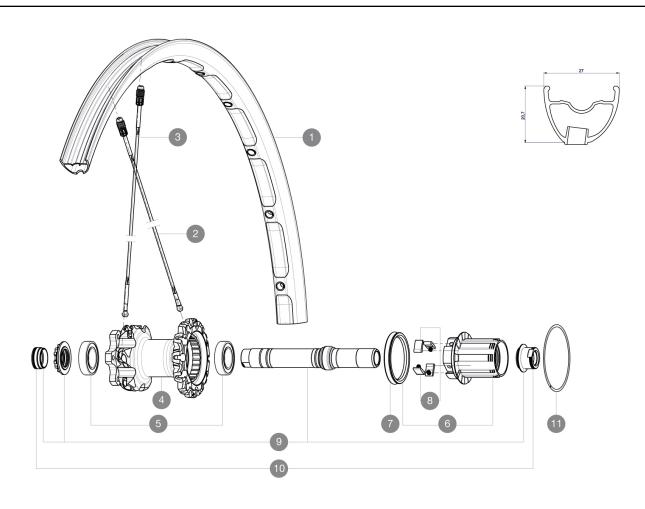

RIMS



バルブ穴径(MM): 6,5:

1	V2314013	KIT REAR RIM CROSSMAX XI	PRO LIMITED 27 5"

SPOKES

2	36675101	"10 SPOKES DRIVE SIDE CROSSMAX SLR/ENDURO 650b/27,5""
3	36674901	252 SPOKES FRONT CROSSMAX SLR/ENDURO 650b/27,5"" 274mm"

HUB SHELLS

4	N/A	HUB BODY
5	M40076	HUB BEARINGS 17x30x7 6903 x 2
6	35126001	ITS-4 FREEWHEEL BODY + SEAL 2013 (WITHOUT PAWLS)
7	99610701	ITS4 SEAL
8	99610601	ITS4 PAWLS KIT
9	30870401	REAR AXLE KIT ITS4 135mm D6T/DCL 2012
11	30871801	ELASTIC RING 56mm diam.

ADAPTERS

10	30872201	FORK REST ITS-4 135mm REAR AXLE > 2012



Crossmax XL pro Ltd 27.5 WTS

Specifications

スポーク

・Shape: straight pull, bladed ホイールの重み

ホイール重量(クイックリリー スおよびクリンチャー/チューブ ラーを除く)(g):