

CROSSRIDE FTS-X 27.5

ASTM CATEGORY 3: offroad with jumps less than 61cm

For a longer longevity of the wheel, Mavic recommends that the total weight supported by

the wheels doesn't exceed 120kg, bike included Recommended tyre sizes: 36 mm to 64 mm (1.4" to 2.5")

ID360 ã□·ã□□ã□□ ã□¹ã□□ã□¼ã□«

 $\tilde{a} \square \square \tilde{a} \square^a \tilde{a} \square ^4 \tilde{a} \square \square \tilde{a} \square ^a \tilde{a} \square ^4 \tilde{a} \square ^a \tilde{a} \square ^4 \tilde{a} \square \square \tilde{a} \square \square \tilde{a} \square \mathfrak{L} \tilde{i} ^4 \square [V3790101] \tilde{i} ^4 \square \tilde{a} \square \tilde{$


\$\land \land jÂjÂjÂjÂjÂjÂjÂjÂjÂjÂjÂjÂjÂj

Maximum tyre pressure: 6.1bar/88PSI with a 25mm tyre - 3.5bar/51PSI with a 64mm tyre Recommended tire sizes: 28 to 64 mm (1.1" to 2.5")

ETRTO recommended tyre sizes: 35mm to 69mm (1.4" to 2.7")

参照ホイール

R76301 XRIDE FTS-X INT 27,5 QR M10

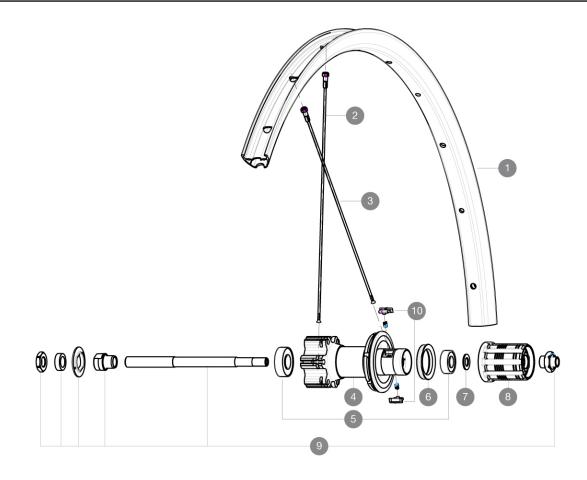

RIMS



:

1 V2314815 RIM CROSSRIDE + CROSSRIDE FTSX 27,5

SPOKES

2	V2381901	12 FRT + REAR NON-DRIVE SIDE SPOKES 279mm CROSSRIDE
3	36690201	F125P7KES DRIVE SIDE CROSSRONE 650b/27,5"" 276mm"

HUB SHELLS

4	N/A	HUB BODY
5	M40660	REAR HUB 608+6001 BEARINGS
6	99500001	FTSL/FTSX FREEHUB BODY SEAL
7	M40067	10 SPACERS FRW/HUB BODY
8	30871101	FTS-L FREEWHEEL BODY HG11 2013 (8 or 9mm axle compatible)
9	32348001	DISC REAR AXLE XLAND/XMAX ENDU

10 32430301 FTSX MTB PAWLS KIT



MAVIC CROSSRIDE FTS-X 27.5

<mark>付属品</mark> BR101 quick releases		
User guide		
Rim tape		
Front QR adapters		
BR101 quick releases		
BR101 quick releases		
BR101 quick releases		
BR101 quick releases		
BR101 quick releases		
BR101 quick releases		
BR101 quick releases		
DICTOT quick releases		
BR101 quick releases		
BR101 quick releases		
Valve reducer		
User guide		
Front QR adapters		
Front QR adapters		
Front QR adapters		

COMPATIBILITY	
Freewheel: Shimano/Sram	
Freewheel: Shimano/Sram	
Freewheel: Shimano/Sram	
Freewneel: Snimano/Sram	
Freewheel: Shimano/Sram	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru	
axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
Front axle: convertible from 15mm thru axle to Quick Release with included adapters	
¿Â\$Â\$Â\$Â\$Â\$Â\$Â\$Â\$Â\$Â\$Â\$Â\$Â\$Â \$Â\$Â\$	
¿¿Â\$Á\$Á\$Á\$Á\$Á\$Á\$Á\$Á\$Á\$Á\$Á\$Á\$Á\$Á ¿Â\$Á\$	
¿¿¿¿¿¿¿¿¿¿¿¿Â ¿Â¿Â¿	
¿¿¿¿¿¿¿¿¿¿¿¿¿Â ¿Â¿Â¿	
¿¿¿¿¿¿¿¿¿¿¿¿¿Â ¿Â¿Â¿	
¿¿¿¿¿¿¿¿¿¿¿¿¿Â ¿Â¿Â¿	
$\tilde{a}\Box^{a}\tilde{a}\Box\phi\tilde{a}\Box\phi\tilde{a}\Box^{-}\tilde{a}\Box^{1}\tilde{a}\Box\ll\ddot{1}^{1}\Box2mm\tilde{a}\Box^{1}$	
ã□«ã□¼ã□¢ã□¯ã□¹ã□«ã□□ã□¢ã□	